



Filename: PD30505-BG_CL-UNV - Rise

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: PD30505-BG_CL-UNV - Rise

Lamp: DC LED Module

Lamp Cat: DC LED Module

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.17AMP ; Vout = 12 - 40VDC , Iout = 300mA

Ballast Cat: Novbo - NE016277030 - 2GH

Lamp Output: Total luminaire Lumens: 832

Max Candela: 79.1 at Horizontal: 170°, Vertical: 71°

Input Wattage: 12.3

Luminous Opening: Rectangle (L: 4.57", W: 10")

Test: 3764--25


Test Date: 21 October 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

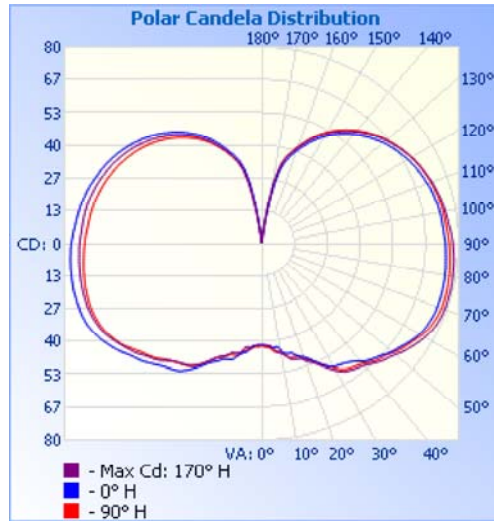


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	42.5	5.1%
0-40	80.6	9.7%
0-60	195.9	23.5%
60-90	237.5	28.5%
70-100	243.1	29.2%
90-120	226.5	27.2%
0-90	433.4	52.1%
90-180	398.6	47.9%
0-180	832.0	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	4.1	0.5%	90-100	80.6	9.7%
10-20	13.5	1.6%	100-110	76.6	9.2%
20-30	24.9	3.0%	110-120	69.4	8.3%
30-40	38.1	4.6%	120-130	59.4	7.1%
40-50	51.1	6.1%	130-140	47.4	5.7%
50-60	64.2	7.7%	140-150	34.2	4.1%
60-70	75.0	9.0%	150-160	21.1	2.5%
70-80	80.5	9.7%	160-170	9.4	1.1%
80-90	82.0	9.9%	170-180	0.6	0.1%

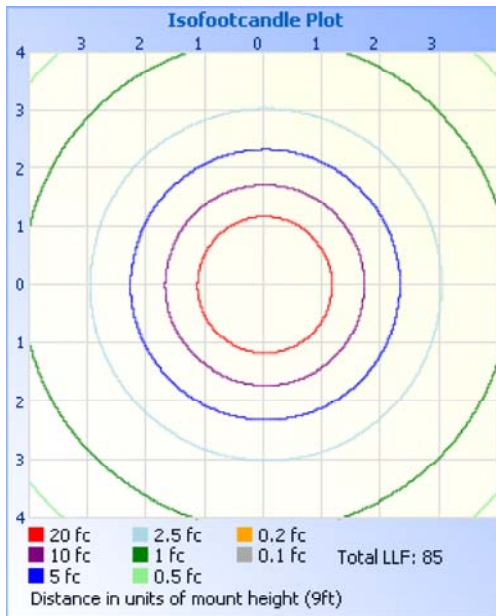

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5R	18.5 fc	
3.0R	4.63 fc	
4.5R	2.06 fc	
6.0R	1.16 fc	
7.5R	0.74 fc	
9.0R	0.51 fc	