



Filename: PD321201NB - Marni

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT MOUNT

Luminaire Cat: Marni - PD321201NB

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC ; Iout = 160mA

Ballast Cat: Novbo - NE007277016 - 2GH

Lamp Output: Total luminaire Lumens: 293.1

Max Candela: 91.0 at Horizontal: 160°, Vertical: 54°

Input Wattage: 6.6

Luminous Opening: Point

Test: 3167-25


Test Date: 12 March 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Semicutoff

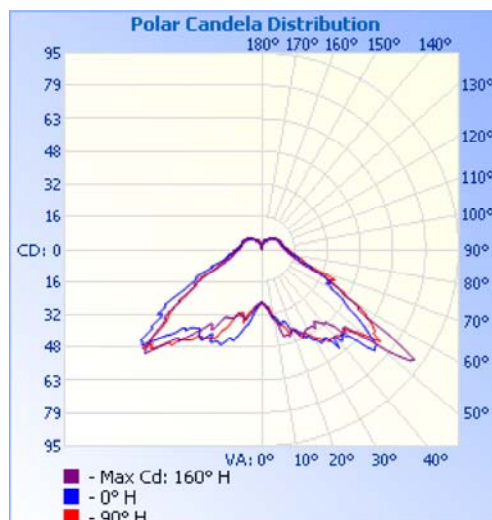


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	35.0	12%
0-40	67.4	23%
0-60	170.7	58.2%
60-90	70.8	24.2%
70-100	46.9	16%
90-120	31.8	10.9%
0-90	241.5	82.4%
90-180	51.6	17.6%
0-180	293.1	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	2.9	1.0%	90-100	12.2	4.2%
10-20	11.0	3.7%	100-110	10.6	3.6%
20-30	21.1	7.2%	110-120	9.1	3.1%
30-40	32.4	11.0%	120-130	7.3	2.5%
40-50	48.0	16.4%	130-140	5.5	1.9%
50-60	55.3	18.9%	140-150	3.6	1.2%
60-70	36.1	12.3%	150-160	2.3	0.8%
70-80	19.9	6.8%	160-170	1.0	0.3%
80-90	14.8	5.1%	170-180	0.1	0%

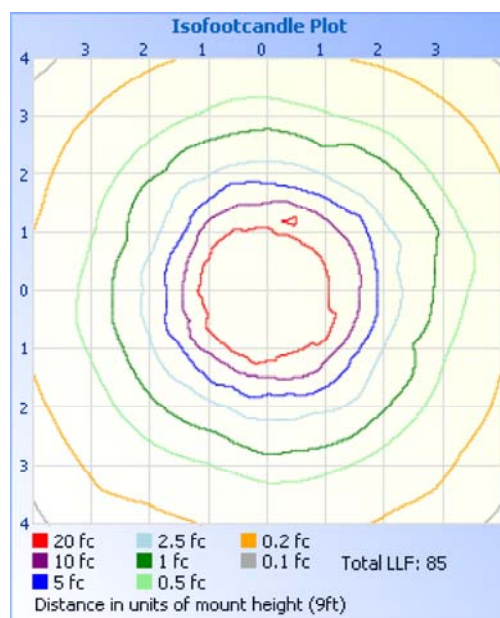

Illuminance at a Distance			
Center Beam fc	Beam Width		
1.5ft	11.6 fc	1.4 ft	2.8 ft
3.0ft	2.90 fc	2.8 ft	5.5 ft
4.5ft	1.29 fc	4.2 ft	8.3 ft
6.0ft	0.72 fc	5.5 ft	11.0 ft
7.5ft	0.46 fc	6.9 ft	13.8 ft
9.0ft	0.32 fc	8.3 ft	16.5 ft

■ Vert. Spread: 49.6°
 ■ Horiz. Spread: 85.1°