



Filename: PD336507VB-UNV - Anders

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Anders - PD336507VB - UNV

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC ; Iout = 700mA

Ballast Cat: Novbo - NE032277070 - 2GH

Lamp Output: Total luminaire Lumens: 1597.1

Max Candela: 175.7 at Horizontal: 310°, Vertical: 84°

Input Wattage: 26.9

Luminous Opening: Point

Test: 3186-25


Test Date: 17 March 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

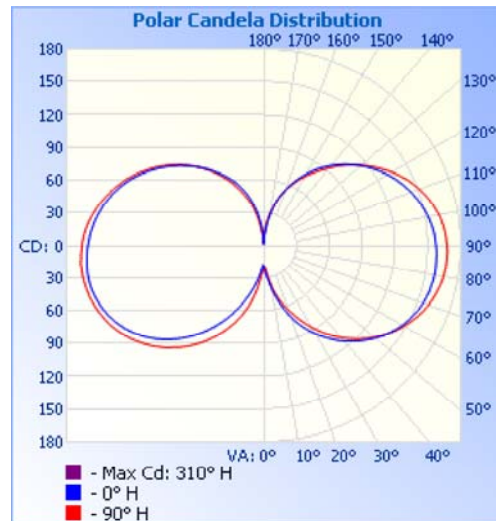


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	54.5	3.4%
0-40	119.2	7.5%
0-60	342.0	21.4%
60-90	498.5	31.2%
70-100	518.9	32.5%
90-120	470.0	29.4%
0-90	840.4	52.6%
90-180	756.6	47.4%
0-180	1,597.1	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	2.9	0.2%	90-100	172.9	10.8%
10-20	15.2	0.9%	100-110	159.5	10%
20-30	36.5	2.3%	110-120	137.7	8.6%
30-40	64.6	4.0%	120-130	110.3	6.9%
40-50	96.1	6.0%	130-140	81.0	5.1%
50-60	126.7	7.9%	140-150	53.1	3.3%
60-70	152.4	9.5%	150-160	29.4	1.8%
70-80	169.6	10.6%	160-170	11.4	0.7%
80-90	176.4	11.0%	170-180	1.5	0.1%

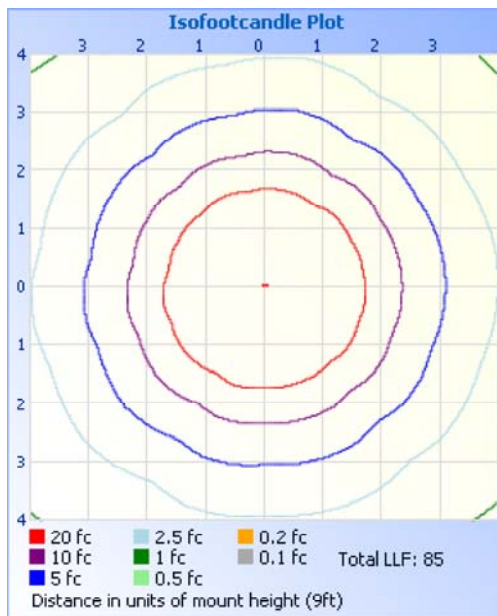

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	8.65 fc	0.2 ft
3.0ft	2.16 fc	0.5 ft
4.5ft	0.96 fc	0.7 ft
6.0ft	0.54 fc	0.9 ft
7.5ft	0.35 fc	1.2 ft
9.0ft	0.24 fc	1.4 ft

■ Beam Spread: 9.0°