



**Filename:** PD418006WH-UNV - Issa

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Issa - PD418006WH- UNV

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC , Iout = 250mA

**Ballast Cat:** Novbo - NE009277025 - 2GH

**Lamp Output:** Total luminaire Lumens: 694

**Max Candela:** 248.8 at Horizontal: 0°, Vertical: 2.5°

**Input Wattage:** 11.1

**Luminous Opening:** Circular (Dia: 4.33")

**Test:** 2850-24

**Test Date:** 28 November 2024


**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 7 X 7

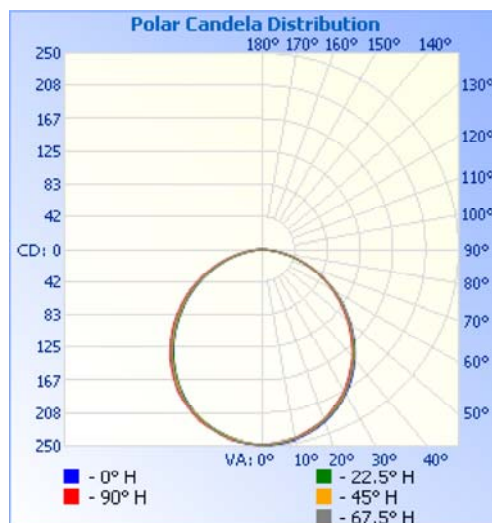

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	192.3	27.7%
0-40	314.1	45.3%
0-60	548.4	79%
60-90	139.1	20%
70-100	58.6	8.4%
90-120	2.5	0.4%
0-90	687.6	99.1%
90-180	6.5	0.9%
0-180	694.0	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	23.5	3.4%	90-100	0.8	0.1%
10-20	67.2	9.7%	100-110	0.8	0.1%
20-30	101.7	14.6%	110-120	0.9	0.1%
30-40	121.8	17.5%	120-130	0.9	0.1%
40-50	124.5	17.9%	130-140	0.9	0.1%
50-60	109.9	15.8%	140-150	0.8	0.1%
60-70	81.3	11.7%	150-160	0.7	0.1%
70-80	45.4	6.5%	160-170	0.4	0.1%
80-90	12.4	1.8%	170-180	0.2	0%

