



**Filename:** PD52719-BN-UNV-010 - Anello Minor

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Anello Minor - PD52719 - BN - UNV - 010

**Lamp:** DC LED Module with DC Driver

**Lamp Cat:** DC LED Module with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC, Iin = 0.57AMP max; Vout = 42VDC max, Iout = 1200mA

**Ballast Cat:** EPT - PVD50 - C120V42 - UNV4 - HE - P

**Lamp Output:** Total luminaire Lumens: 3194.3

**Max Candela:** 350.5 at Horizontal: 130°, Vertical: 75°

**Input Wattage:** 45.9

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3464-25


**Test Date:** 09 July 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

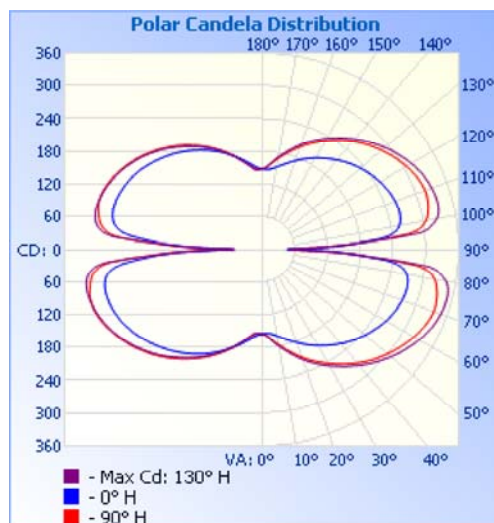


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	165.9	5.2%
0-40	315.5	9.9%
0-60	775.3	24.3%
60-90	862.7	27%
70-100	788.0	24.7%
90-120	819.8	25.7%
0-90	1,638.1	51.3%
90-180	1,556.2	48.7%
0-180	3,194.3	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	15.6	0.5%	90-100	225.4	7.1%
10-20	52.4	1.6%	100-110	309.2	9.7%
20-30	98.0	3.1%	110-120	285.2	8.9%
30-40	149.5	4.7%	120-130	243.3	7.6%
40-50	203.9	6.4%	130-140	193.6	6.1%
50-60	256.0	8.0%	140-150	142.0	4.4%
60-70	300.1	9.4%	150-160	93.0	2.9%
70-80	325.5	10.2%	160-170	49.7	1.6%
80-90	237.1	7.4%	170-180	14.8	0.5%

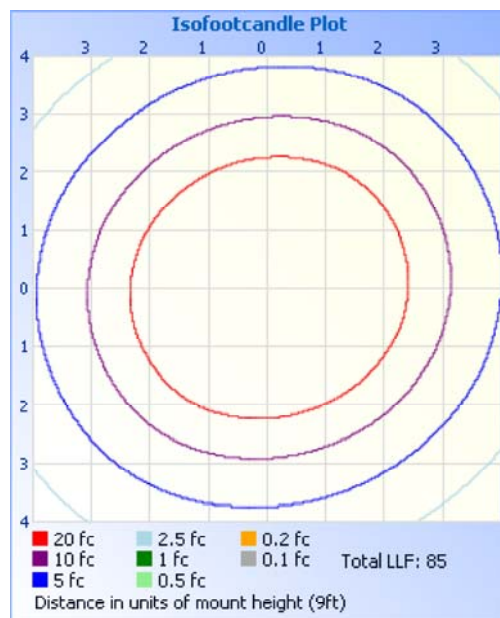

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.5ft	69.2 fc	33.8 ft	21.7 ft
3.0ft	17.3 fc	67.7 ft	43.4 ft
4.5ft	7.69 fc	101.5 ft	65.1 ft
6.0ft	4.32 fc	135.3 ft	86.8 ft
7.5ft	2.77 fc	169.1 ft	108.6 ft
9.0ft	1.92 fc	203.0 ft	130.3 ft

■ Vert. Spread: 169.9°  
■ Horiz. Spread: 164.3°