



**Filename:** PD52724-BK-UNV - Anello Minor

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Anello Minor - PD52724 - BK - UNV

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 700mA

**Ballast Cat:** Novbo - NE032277070 - 2GH (2 - Drivers)

**Lamp Output:** Total luminaire Lumens: 3201.4

**Max Candela:** 341.5 at Horizontal: 150°, Vertical: 77°

**Input Wattage:** 53.3

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3452-25

**Test Date:** 03 July 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse



**Cutoff Class:** Noncutoff

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	165.4	5.2%
0-40	313.5	9.8%
0-60	767.1	24%
60-90	857.9	26.8%
70-100	797.8	24.9%
90-120	832.4	26%
0-90	1,625.0	50.8%
90-180	1,576.3	49.2%
0-180	3,201.4	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	15.7	0.5%	90-100	234.7	7.3%
10-20	52.3	1.6%	100-110	311.6	9.7%
20-30	97.3	3.0%	110-120	286.1	8.9%
30-40	148.1	4.6%	120-130	244.5	7.6%
40-50	201.6	6.3%	130-140	195.5	6.1%
50-60	252.0	7.9%	140-150	143.6	4.5%
60-70	294.9	9.2%	150-160	94.3	2.9%
70-80	321.2	10.0%	160-170	50.7	1.6%
80-90	241.8	7.6%	170-180	15.2	0.5%

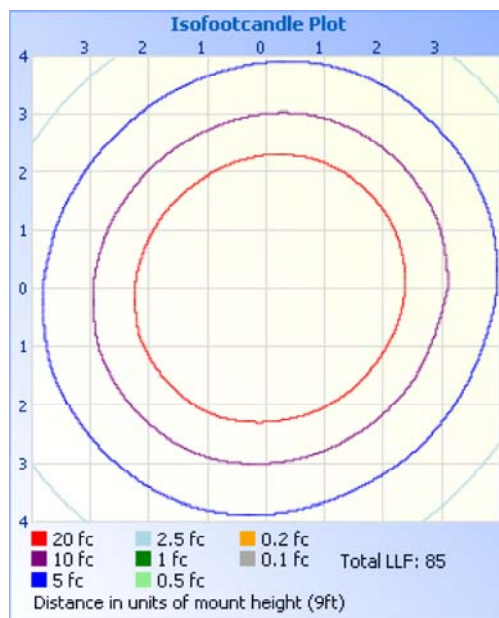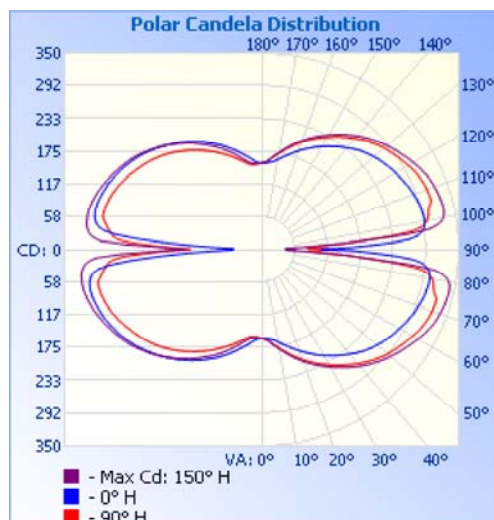

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.5R	70.5 fc	22.9 ft	31.4 ft
3.0R	17.6 fc	45.8 ft	62.8 ft
4.5R	7.84 fc	68.7 ft	94.2 ft
6.0R	4.41 fc	91.6 ft	125.6 ft
7.5R	2.82 fc	114.5 ft	157.0 ft
9.0R	1.96 fc	137.4 ft	188.4 ft

■ Vert. Spread: 165.1°  
■ Horiz. Spread: 169.1°