



Filename: PD52724-BN-UNV - Anello Minor

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Anello Minor - PD52724 - BN

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120VAC , Iin = 0.3AMP ; Vout = 18 - 40VDC , Iout = 700mA

Ballast Cat: Novbo - NE032120070 - 2G (2 - Drivers)

Lamp Output: Total luminaire Lumens: 3722.8

Max Candela: 392.2 at Horizontal: 40°, Vertical: 76°

Input Wattage: 54.5

Luminous Opening: Circular (Dia: 4.92")

Test: 3454-25


Test Date: 04 July 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

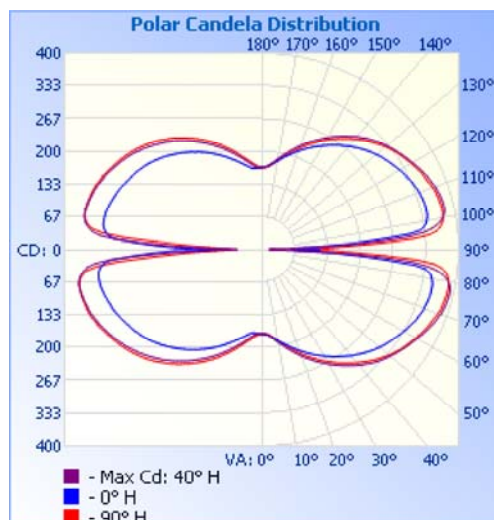


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	185.7	5%
0-40	356.4	9.6%
0-60	885.1	23.8%
60-90	1,004.7	27%
70-100	930.1	25%
90-120	974.7	26.2%
0-90	1,889.7	50.8%
90-180	1,833.0	49.2%
0-180	3,722.8	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	17.2	0.5%	90-100	270.9	7.3%
10-20	58.2	1.6%	100-110	368.7	9.9%
20-30	110.3	3.0%	110-120	335.1	9%
30-40	170.6	4.6%	120-130	285.6	7.7%
40-50	234.3	6.3%	130-140	227.2	6.1%
50-60	294.4	7.9%	140-150	165.4	4.4%
60-70	345.4	9.3%	150-160	107.0	2.9%
70-80	380.1	10.2%	160-170	56.4	1.5%
80-90	279.1	7.5%	170-180	16.7	0.4%

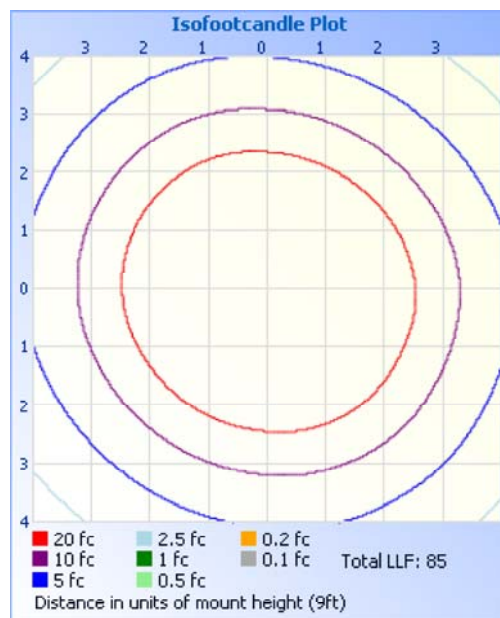

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.5ft	76.6 fc	49.7 ft	16.4 ft
3.0ft	19.2 fc	99.4 ft	32.8 ft
4.5ft	8.51 fc	149.0 ft	49.3 ft
6.0ft	4.79 fc	198.7 ft	65.7 ft
7.5ft	3.07 fc	248.4 ft	82.1 ft
9.0ft	2.13 fc	298.1 ft	98.5 ft

■ Vert. Spread: 173.1°
■ Horiz. Spread: 159.3°