



Filename: PD52732-WT-UNV - Anello Minor

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Anello Minor - PD52732 - WT - UNV (Front)

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.55AMP ; Vout = 18 - 49VDC , Iout = 1000mA

Ballast Cat: Novbo - NE046277100 - 2GH (2 - Drivers)

Lamp Output: Total luminaire Lumens: 4731.1

Max Candela: 488.9 at Horizontal: 210°, Vertical: 81°

Input Wattage: 76

Luminous Opening: Circular (Dia: 4.92")

Test: 3455-25


Test Date: 04 July 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

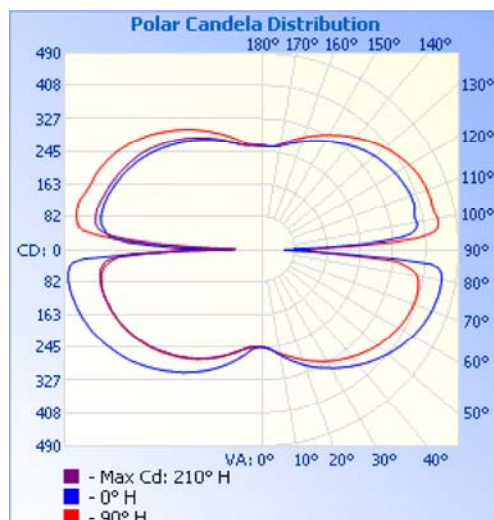


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	252.4	5.3%
0-40	473.5	10%
0-60	1,138.2	24.1%
60-90	1,264.7	26.7%
70-100	1,196.1	25.3%
90-120	1,221.7	25.8%
0-90	2,402.9	50.8%
90-180	2,328.2	49.2%
0-180	4,731.1	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	24.3	0.5%	90-100	357.9	7.6%
10-20	80.5	1.7%	100-110	450.3	9.5%
20-30	147.6	3.1%	110-120	413.6	8.7%
30-40	221.1	4.7%	120-130	356.5	7.5%
40-50	296.8	6.3%	130-140	287.5	6.1%
50-60	367.8	7.8%	140-150	214.1	4.5%
60-70	426.6	9.0%	150-160	143.5	3%
70-80	465.7	9.8%	160-170	79.8	1.7%
80-90	372.4	7.9%	170-180	25.1	0.5%

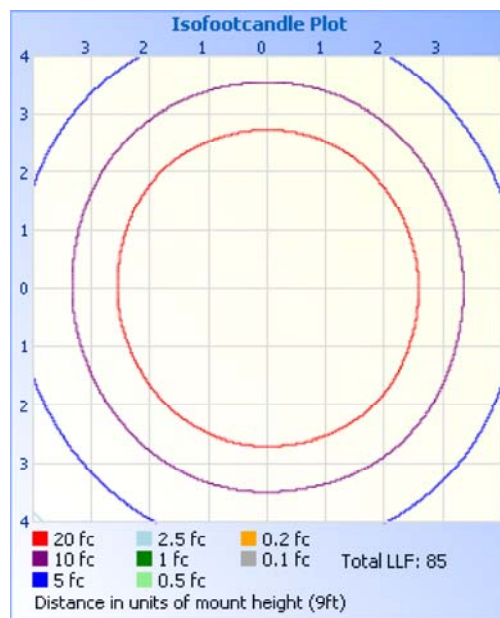

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.5R	109 fc	89.0 ft	13.2 ft
3.0R	27.2 fc	177.9 ft	26.5 ft
4.5R	12.1 fc	266.9 ft	39.7 ft
6.0R	6.79 fc	355.8 ft	53.0 ft
7.5R	4.34 fc	444.8 ft	66.2 ft
9.0R	3.02 fc	533.7 ft	79.5 ft

■ Vert. Spread: 176.1°
■ Horiz. Spread: 154.5°