



**Filename:** PD530341BNOP-UNV - Bijou

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Bijou - PD530341BNOP - UNV

**Lamp:** DC LED Module with DC Driver

**Lamp Cat:** DC LED Module with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 500mA

**Ballast Cat:** Novbo - NE024277050 - 2GH

**Lamp Output:** Total luminaire Lumens: 1932.6

**Max Candela:** 183.2 at Horizontal: 180°, Vertical: 74°

**Input Wattage:** 19

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3482-25


**Test Date:** 11 July 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff


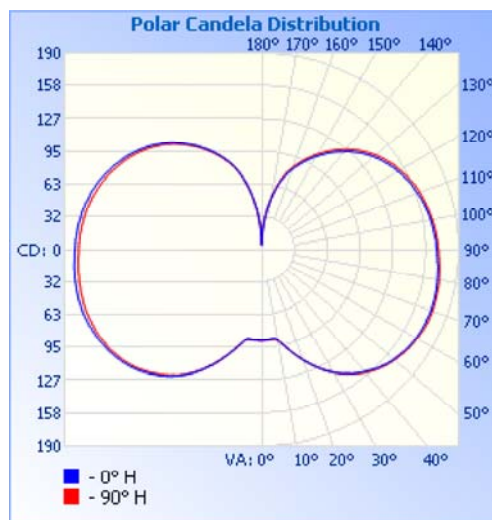


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	95.7	5%
0-40	188.4	9.7%
0-60	468.4	24.2%
60-90	552.3	28.6%
70-100	565.1	29.2%
90-120	525.6	27.2%
0-90	1,020.8	52.8%
90-180	911.9	47.2%
0-180	1,932.6	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	8.4	0.4%	90-100	187.5	9.7%
10-20	28.8	1.5%	100-110	177.8	9.2%
20-30	58.5	3.0%	110-120	160.3	8.3%
30-40	92.7	4.8%	120-130	135.8	7%
40-50	125.9	6.5%	130-140	106.5	5.5%
50-60	154.1	8.0%	140-150	74.9	3.9%
60-70	174.8	9.0%	150-160	45.3	2.3%
70-80	187.0	9.7%	160-170	20.3	1%
80-90	190.6	9.9%	170-180	3.4	0.2%

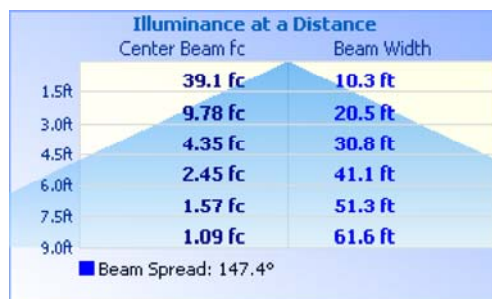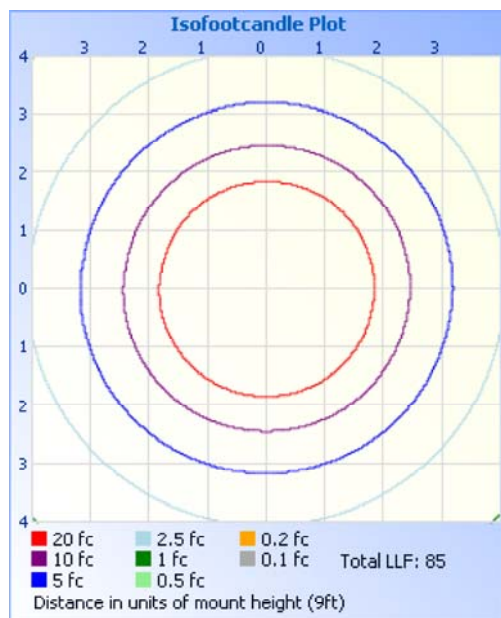

Photometrics Pro 1.3.29 copyright 2003-2025 by jSolutions, Inc.  
Reported data calculated from manufacturer's data file, based on IES recommended methods.