



Filename: PD531515AGOP-UNV - Bijou

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Bijou - PD531515AGOP - UNV

Lamp: DC LED Module with DC Driver

Lamp Cat: DC LED Module with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 500mA

Ballast Cat: Novbo - NE024277050 - 2GH

Lamp Output: Total luminaire Lumens: 1890.8

Max Candela: 189.7 at Horizontal: 220°, Vertical: 79°

Input Wattage: 19

Luminous Opening: Circular (Dia: 4.92")

Test: 3486-25


Test Date: 14 July 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

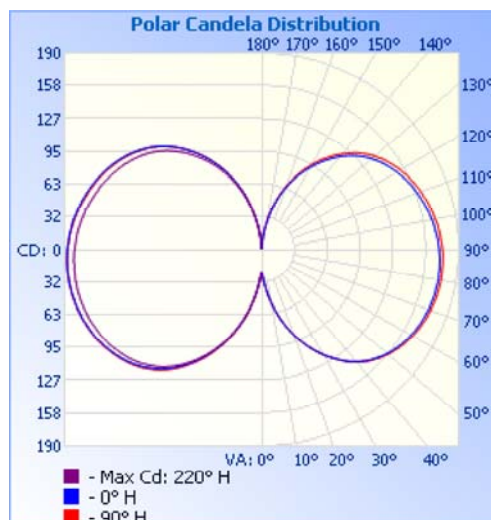


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	73.9	3.9%
0-40	158.7	8.4%
0-60	430.4	22.8%
60-90	561.7	29.7%
70-100	580.4	30.7%
90-120	536.8	28.4%
0-90	992.1	52.5%
90-180	898.7	47.5%
0-180	1,890.8	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	3.9	0.2%	90-100	193.5	10.2%
10-20	20.7	1.1%	100-110	181.4	9.6%
20-30	49.2	2.6%	110-120	161.9	8.6%
30-40	84.8	4.5%	120-130	135.9	7.2%
40-50	120.6	6.4%	130-140	104.2	5.5%
50-60	151.1	8.0%	140-150	69.4	3.7%
60-70	174.7	9.2%	150-160	37.7	2%
70-80	190.3	10.1%	160-170	13.4	0.7%
80-90	196.6	10.4%	170-180	1.3	0.1%

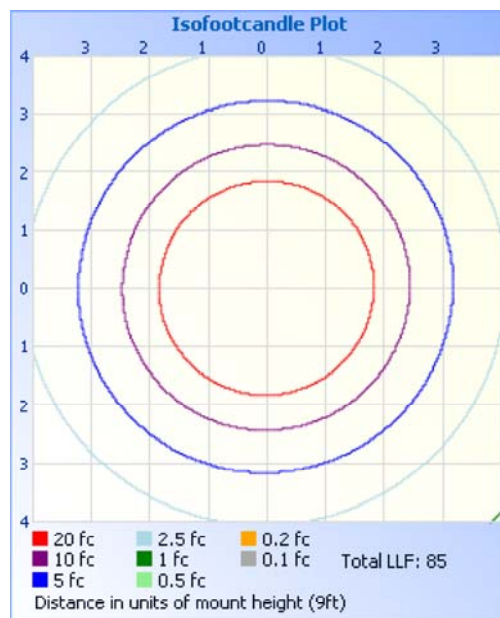

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	10.1 fc	49.0 ft
3.0ft	2.53 fc	98.1 ft
4.5ft	1.13 fc	147.1 ft
6.0ft	0.63 fc	196.2 ft
7.5ft	0.41 fc	245.2 ft
9.0ft	0.28 fc	294.3 ft

■ Beam Spread: 173.0°