



Filename: PD70615-CLBG-UNV - Enkel

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Enkel - PD70615 - CL/BG - UNV

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.55AMP ; Vout = 18 - 49VDC , Iout = 900mA

Ballast Cat: Novbo - NE046277090 - 2GH

Lamp Output: Total luminaire Lumens: 3512.5

Max Candela: 761.5 at Horizontal: 90°, Vertical: 4°

Input Wattage: 36

Luminous Opening: Circular (Dia: 4.92")

Test: 3493-25


Test Date: 17 July 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff


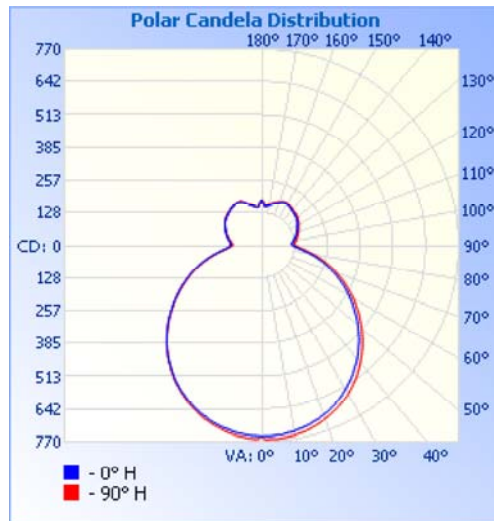


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	588.5	16.8%
0-40	973.1	27.7%
0-60	1,773.3	50.5%
60-90	743.3	21.2%
70-100	544.9	15.5%
90-120	436.2	12.4%
0-90	2,516.7	71.7%
90-180	995.8	28.3%
0-180	3,512.5	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	70.9	2.0%	90-100	134.2	3.8%
10-20	204.3	5.8%	100-110	147.6	4.2%
20-30	313.3	8.9%	110-120	154.3	4.4%
30-40	384.6	10.9%	120-130	153.1	4.4%
40-50	410.3	11.7%	130-140	139.5	4%
50-60	390.0	11.1%	140-150	118.1	3.4%
60-70	332.7	9.5%	150-160	86.5	2.5%
70-80	249.8	7.1%	160-170	47.6	1.4%
80-90	160.9	4.6%	170-180	14.8	0.4%

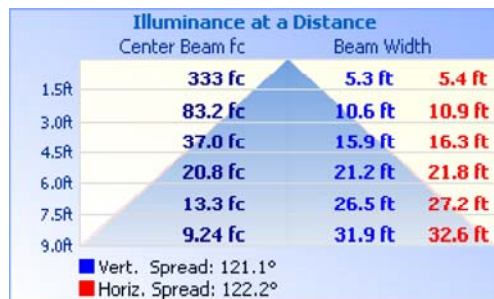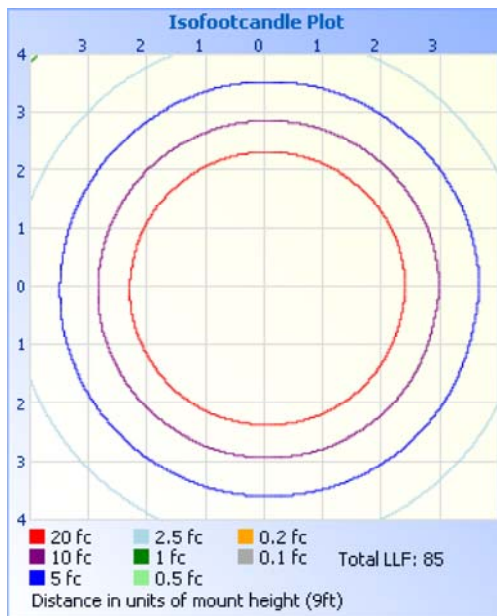

Photometrics Pro 1.3.29 copyright 2003-2025 by jSolutions, Inc.
 Reported data calculated from manufacturer's data file, based on IES recommended methods.