



**Filename:** PD95108-BK-UNV - Huron

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** MULTI PENDANT

**Luminaire Cat:** PD95108-BK - Huron

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 100 - 135VAC , Iin = 0.6A ; Vout = 25 - 40VDC , Iout = 700mA

**Ballast Cat:** BQE30 - 0700 - 40 - TD

**Lamp Output:** Total luminaire Lumens: 1083.5

**Max Candela:** 122.6 at Horizontal: 140°, Vertical: 80°

**Input Wattage:** 12

**Luminous Opening:** Point

**Test:** 2986-25


**Test Date:** 17 January 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

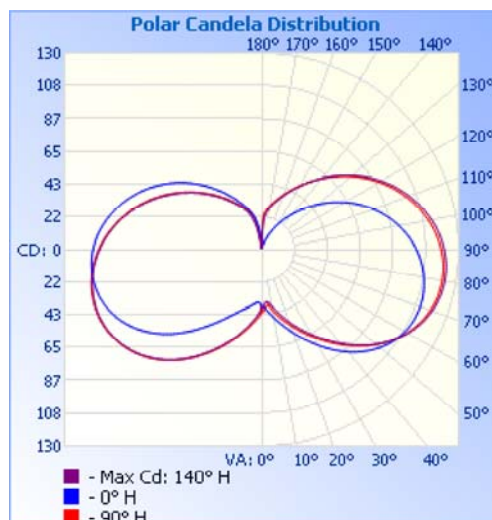


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	48.0	4.4%
0-40	97.5	9%
0-60	264.2	24.4%
60-90	355.4	32.8%
70-100	359.7	33.2%
90-120	302.4	27.9%
0-90	619.6	57.2%
90-180	463.9	42.8%
0-180	1,083.5	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	3.9	0.4%	90-100	115.8	10.7%
10-20	14.5	1.3%	100-110	102.3	9.4%
20-30	29.6	2.7%	110-120	84.3	7.8%
30-40	49.5	4.6%	120-130	64.2	5.9%
40-50	72.4	6.7%	130-140	44.8	4.1%
50-60	94.3	8.7%	140-150	28.4	2.6%
60-70	111.5	10.3%	150-160	15.9	1.5%
70-80	121.3	11.2%	160-170	7.0	0.6%
80-90	122.6	11.3%	170-180	1.1	0.1%

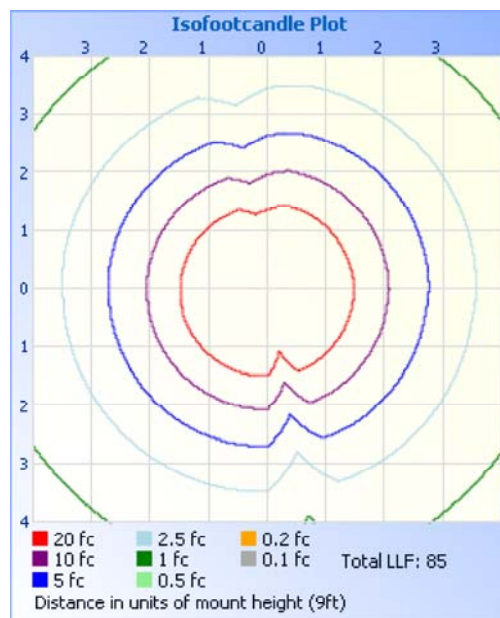

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5R	16.9 fc	
3.0R	4.22 fc	
4.5R	1.88 fc	
6.0R	1.05 fc	
7.5R	0.68 fc	
9.0R	0.47 fc	