



**Filename:** TRP71602-BG - Remuda

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** TRACK LIGHT

**Luminaire Cat:** Remuda - TRP71602 - BG

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 100 - 277VAC, Iin = 0.41AMP ; Vout = 48VDC, Iout = 0.75AMP

**Ballast Cat:** Hueuc - DCV - 36 - 48

**Lamp Output:** Total luminaire Lumens: 763.3

**Max Candela:** 2,563.0 at Horizontal: 30°, Vertical: 6°

**Input Wattage:** 13.3

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3643--25

**Test Date:** 16 September 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 3 X 4

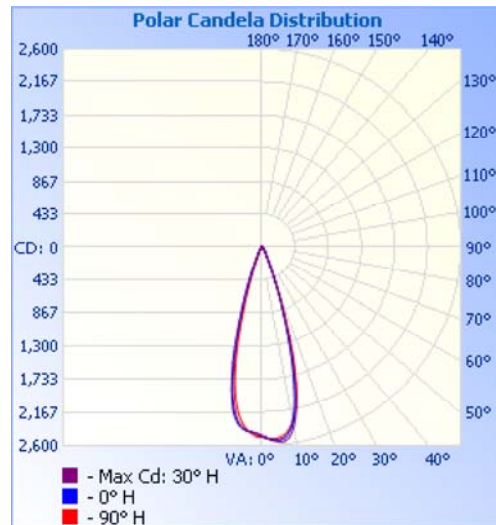

#### Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 689.1  | 90.3%       |
| 0-40   | 726.8  | 95.2%       |
| 0-60   | 751.0  | 98.4%       |
| 60-90  | 5.5    | 0.7%        |
| 70-100 | 1.9    | 0.2%        |
| 90-120 | 0.3    | 0%          |
| 0-90   | 756.6  | 99.1%       |
| 90-180 | 6.7    | 0.9%        |
| 0-180  | 763.3  | 100%        |

#### Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 227.2  | 29.8%   | 90-100  | 0.0    | 0%      |
| 10-20 | 365.7  | 47.9%   | 100-110 | 0.1    | 0%      |
| 20-30 | 96.2   | 12.6%   | 110-120 | 0.2    | 0%      |
| 30-40 | 37.7   | 4.9%    | 120-130 | 0.4    | 0.1%    |
| 40-50 | 16.6   | 2.2%    | 130-140 | 0.8    | 0.1%    |
| 50-60 | 7.6    | 1.0%    | 140-150 | 1.4    | 0.2%    |
| 60-70 | 3.7    | 0.5%    | 150-160 | 1.8    | 0.2%    |
| 70-80 | 1.5    | 0.2%    | 160-170 | 1.4    | 0.2%    |
| 80-90 | 0.3    | 0.0%    | 170-180 | 0.5    | 0.1%    |

