



**Filename:** TRS25925-BK - Paolo

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** Track Light

**Luminaire Cat:** Paolo - TRS25925 - BK

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 100 - 277VAC , Iin = 0.41AMP ; Vout = 48VDC , Iout = 0.75AMP

**Ballast Cat:** Hueuc - DCV - 36 - 48

**Lamp Output:** Total luminaire Lumens: 835.5

**Max Candela:** 2,875.2 at Horizontal: 270°, Vertical: 2°

**Input Wattage:** 13.5

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3582--25

**Test Date:** 03 September 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 4 X 4

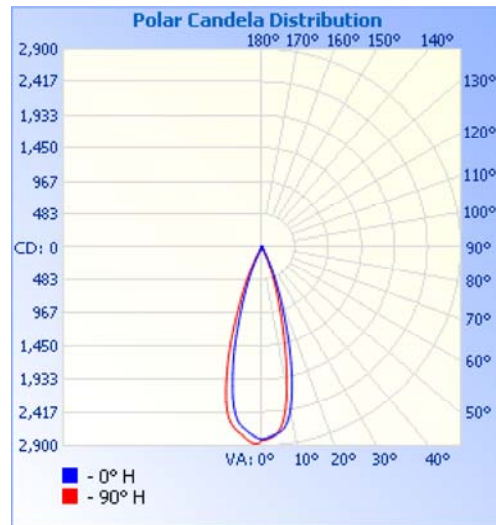

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	797.3	95.4%
0-40	814.1	97.4%
0-60	827.2	99%
60-90	1.0	0.1%
70-100	0.1	0%
90-120	0.3	0%
0-90	828.2	99.1%
90-180	7.3	0.9%
0-180	835.5	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	249.3	29.8%	90-100	0.0	0%
10-20	414.9	49.7%	100-110	0.1	0%
20-30	133.2	15.9%	110-120	0.2	0%
30-40	16.8	2.0%	120-130	0.4	0%
40-50	9.0	1.1%	130-140	0.9	0.1%
50-60	4.1	0.5%	140-150	1.6	0.2%
60-70	0.9	0.1%	150-160	2.0	0.2%
70-80	0.1	0.0%	160-170	1.6	0.2%
80-90	0.0	0.0%	170-180	0.6	0.1%

