



**Filename:** TRS25925-WH - Paolo

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** Track Light

**Luminaire Cat:** Paolo - TRS25925 - WH

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 100 - 277VAC , Iin = 0.41AMP ; Vout = 48VDC , Iout = 0.75AMP

**Ballast Cat:** Hueuc - DCV - 36 - 48

**Lamp Output:** Total luminaire Lumens: 868.3

**Max Candela:** 2,898.9 at Horizontal: 270°, Vertical: 1°

**Input Wattage:** 13.3

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3584--25

**Test Date:** 03 September 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 4 X 4

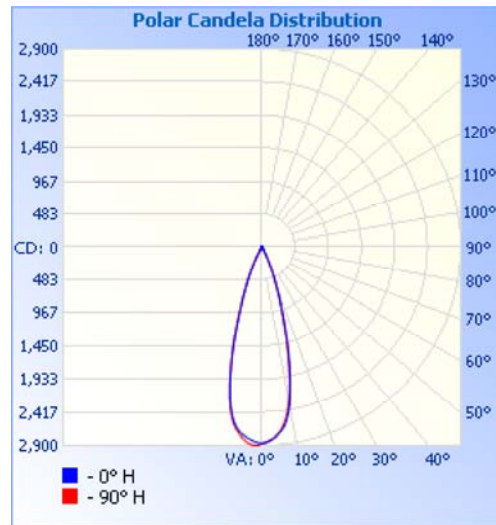

#### Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 805.5  | 92.8%       |
| 0-40   | 827.3  | 95.3%       |
| 0-60   | 851.3  | 98%         |
| 60-90  | 9.4    | 1.1%        |
| 70-100 | 3.6    | 0.4%        |
| 90-120 | 0.4    | 0%          |
| 0-90   | 860.7  | 99.1%       |
| 90-180 | 7.6    | 0.9%        |
| 0-180  | 868.3  | 100%        |

#### Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 253.7  | 29.2%   | 90-100  | 0.0    | 0%      |
| 10-20 | 415.5  | 47.9%   | 100-110 | 0.1    | 0%      |
| 20-30 | 136.3  | 15.7%   | 110-120 | 0.2    | 0%      |
| 30-40 | 21.8   | 2.5%    | 120-130 | 0.4    | 0.1%    |
| 40-50 | 14.4   | 1.7%    | 130-140 | 1.0    | 0.1%    |
| 50-60 | 9.6    | 1.1%    | 140-150 | 1.6    | 0.2%    |
| 60-70 | 5.8    | 0.7%    | 150-160 | 2.0    | 0.2%    |
| 70-80 | 2.8    | 0.3%    | 160-170 | 1.6    | 0.2%    |
| 80-90 | 0.8    | 0.1%    | 170-180 | 0.6    | 0.1%    |

