



**Filename:** WS14923-BK-UNV - Chute

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE/WALL MOUNT

**Luminaire Cat:** CHUTE-WS14923-BK-UNV

**Lamp:** DC LED

**Lamp Cat:** NA

**Ballast Desc:** Vin = 120-277VAC, Iin\_0.17A; Vout =12-40VDC, Iout=300mA

**Ballast Cat:** NE016277030-2GH

**Lamp Output:** Total luminaire Lumens: 485

**Max Candela:** 136.1 at Horizontal: 2.5°, Vertical: 90°

**Input Wattage:** 11.6

**Luminous Opening:** Rectangle (L: 20", W: 0.79")

**Test:** 4423-26

**Test Date:** 14 October 2026


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 7 X 6

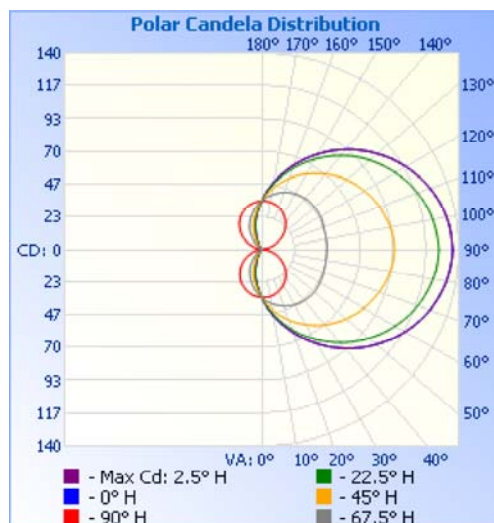

#### Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 29.3   | 6%          |
| 0-40   | 51.7   | 10.7%       |
| 0-60   | 114.6  | 23.6%       |
| 60-90  | 127.4  | 26.3%       |
| 70-100 | 133.1  | 27.4%       |
| 90-120 | 127.9  | 26.4%       |
| 0-90   | 241.9  | 49.9%       |
| 90-180 | 243.1  | 50.1%       |
| 0-180  | 485.0  | 100%        |

#### Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 3.3    | 0.7%    | 90-100  | 45.1   | 9.3%    |
| 10-20 | 9.9    | 2.0%    | 100-110 | 43.2   | 8.9%    |
| 20-30 | 16.2   | 3.3%    | 110-120 | 39.6   | 8.2%    |
| 30-40 | 22.4   | 4.6%    | 120-130 | 34.6   | 7.1%    |
| 40-50 | 28.5   | 5.9%    | 130-140 | 28.7   | 5.9%    |
| 50-60 | 34.4   | 7.1%    | 140-150 | 22.5   | 4.6%    |
| 60-70 | 39.4   | 8.1%    | 150-160 | 16.2   | 3.3%    |
| 70-80 | 43.0   | 8.9%    | 160-170 | 9.9    | 2%      |
| 80-90 | 45.0   | 9.3%    | 170-180 | 3.3    | 0.7%    |

