



Filename: WS19707-BK - Draven

Manufacturer: KUZCO LIGHTING

Luminaire: WALL SCONCE

Luminaire Cat: Draven - WS19707 - BK

Lamp: DC LED With DC Driver

Lamp Cat: DC LED With DC Driver

Ballast Desc: Vin = 120VAC, Iin = 0.3AMP ; Vout = 18 - 40VDC, Iout = 700mA

Ballast Cat: Novbo - NE032120070 - 2G

Lamp Output: Total luminaire Lumens: 1421.5

Max Candela: 142.3 at Horizontal: 327.5°, Vertical: 122.5°

Input Wattage: 22.8

Luminous Opening: Circular (Dia: 4.92")

Test: 3430-25

Test Date: 26 June 2025

Test Lab: EVERFINE


Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	60.5	4.3%
0-40	121.6	8.6%
0-60	315.2	22.2%
60-90	387.9	27.3%
70-100	401.0	28.2%
90-120	388.3	27.3%
0-90	703.1	49.5%
90-180	718.4	50.5%
0-180	1,421.5	100%

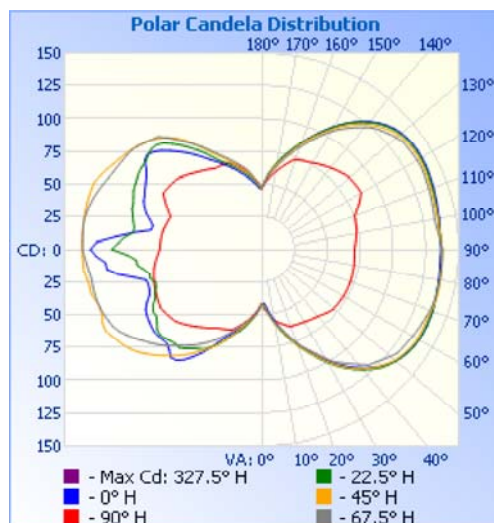

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	4.9	0.3%	90-100	135.1	9.5%
10-20	18.3	1.3%	100-110	130.4	9.2%
20-30	37.2	2.6%	110-120	122.8	8.6%
30-40	61.1	4.3%	120-130	110.6	7.8%
40-50	86.0	6.1%	130-140	90.6	6.4%
50-60	107.5	7.6%	140-150	64.3	4.5%
60-70	122.0	8.6%	150-160	39.4	2.8%
70-80	130.7	9.2%	160-170	19.8	1.4%
80-90	135.2	9.5%	170-180	5.5	0.4%

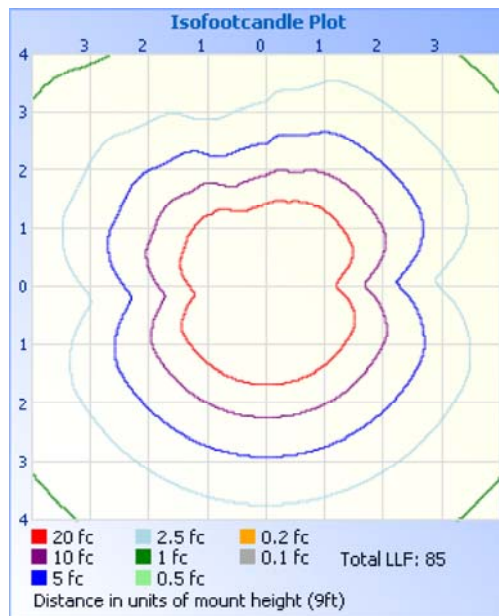

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	18.7 fc	2.7 ft 100.2 ft
3.0ft	4.68 fc	5.4 ft 200.4 ft
4.5ft	2.08 fc	8.1 ft 300.6 ft
6.0ft	1.17 fc	10.7 ft 400.8 ft
7.5ft	0.75 fc	13.4 ft 501.0 ft
9.0ft	0.52 fc	16.1 ft 601.2 ft
Vert. Spread: 83.6°		
Horiz. Spread: 176.6°		