

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** WS25350-BG - Pandora

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** Wall Mount / Wall Sconce

**Luminaire Cat:** WS25350-BG

**Lamp:** DC LED

**Lamp Cat:** Unknown

**Ballast Desc:** Input: 120vac 0.46A 60Hz. Output: 24-36Vdc 1110mA

**Ballast Cat:** LD038H-CU11136-M28E

**Lamp Output:** Total luminaire Lumens: 1746.7

**Max Candela:** 595.5 at Horizontal: 357.5°, Vertical: 90°

**Input Wattage:** 46.5

**Luminous Opening:** Rectangle w/Luminous Sides (L: 0.51", W: 0.51", H: 50")

**Test:** 2253-23

**Test Date:** 11 September 2023


**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 7 X 7

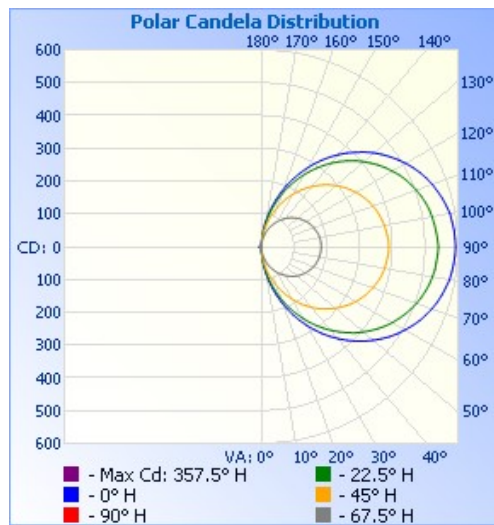

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	46.2	2.6%
0-40	108.5	6.2%
0-60	335.5	19.2%
60-90	539.1	30.9%
70-100	573.8	32.9%
90-120	539.5	30.9%
0-90	874.6	50.1%
90-180	872.1	49.9%
0-180	1,746.7	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	1.6	0.1%	90-100	195.5	11.2%
10-20	11.8	0.7%	100-110	183.2	10.5%
20-30	32.8	1.9%	110-120	160.8	9.2%
30-40	62.3	3.6%	120-130	130.4	7.5%
40-50	96.3	5.5%	130-140	95.9	5.5%
50-60	130.7	7.5%	140-150	61.6	3.5%
60-70	160.8	9.2%	150-160	32.1	1.8%
70-80	183.1	10.5%	160-170	11.3	0.6%
80-90	195.2	11.2%	170-180	1.4	0.1%

