



**Filename:** WS63424-BK - Rezz

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE

**Luminaire Cat:** Rezz - WS63424 - BK

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 500mA

**Ballast Cat:** Novbo - NE024120050 - 2G

**Lamp Output:** Total luminaire Lumens: 359.5

**Max Candela:** 54.5 at Horizontal: 270°, Vertical: 3°

**Input Wattage:** 20.9

**Luminous Opening:** Point

**Test:** 3172-25

**Test Date:** 13 March 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Semi-Direct



**Cutoff Class:** Noncutoff

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	43.3	12%
0-40	72.6	20.2%
0-60	138.4	38.5%
60-90	86.6	24.1%
70-100	79.9	22.2%
90-120	75.6	21%
0-90	225.1	62.6%
90-180	134.5	37.4%
0-180	359.5	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	5.1	1.4%	90-100	25.0	6.9%
10-20	14.9	4.2%	100-110	25.8	7.2%
20-30	23.2	6.5%	110-120	24.9	6.9%
30-40	29.3	8.1%	120-130	21.0	5.8%
40-50	32.6	9.1%	130-140	15.7	4.4%
50-60	33.2	9.2%	140-150	10.8	3%
60-70	31.7	8.8%	150-160	6.6	1.8%
70-80	29.1	8.1%	160-170	3.6	1%
80-90	25.8	7.2%	170-180	1.2	0.3%

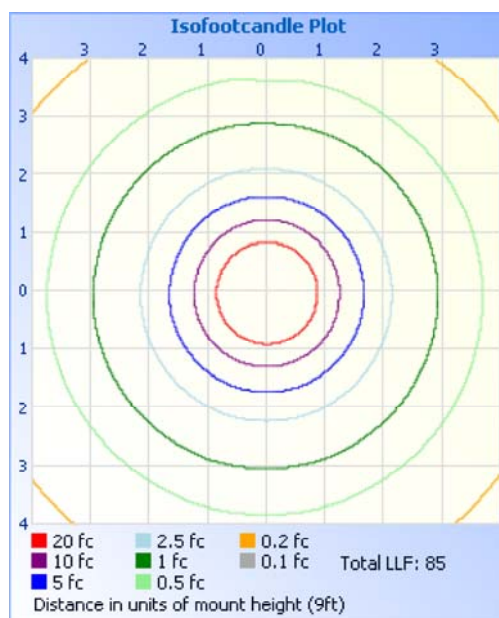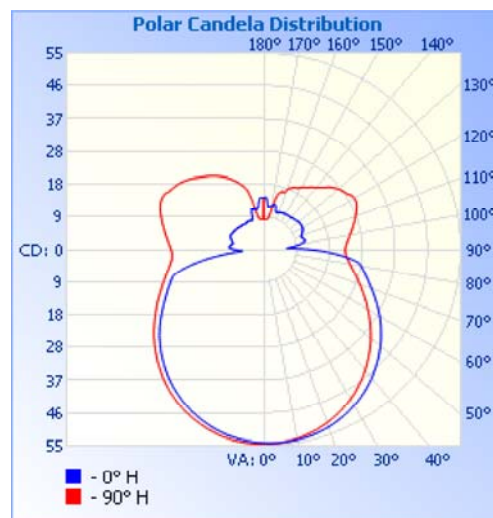

Illuminance at a Distance			
Center Beam fc		Beam Width	
1.5ft	24.1 fc	12.5 ft	11.5 ft
3.0ft	6.03 fc	25.0 ft	22.9 ft
4.5ft	2.68 fc	37.5 ft	34.4 ft
6.0ft	1.51 fc	49.9 ft	45.9 ft
7.5ft	0.96 fc	62.4 ft	57.4 ft
9.0ft	0.67 fc	74.9 ft	68.8 ft

■ Vert. Spread: 153.0°  
■ Horiz. Spread: 150.7°