



**Filename:** WS97204-CH\_CL - Stephord

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE

**Luminaire Cat:** Stephord - WS97204 - CH - CL

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC , Iout = 130mA

**Ballast Cat:** Novbo - NE007277013 - 2GH

**Lamp Output:** Total luminaire Lumens: 285.1

**Max Candela:** 80.4 at Horizontal: 72.5°, Vertical: 150°

**Input Wattage:** 5.3

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3741--25


**Test Date:** 10 October 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

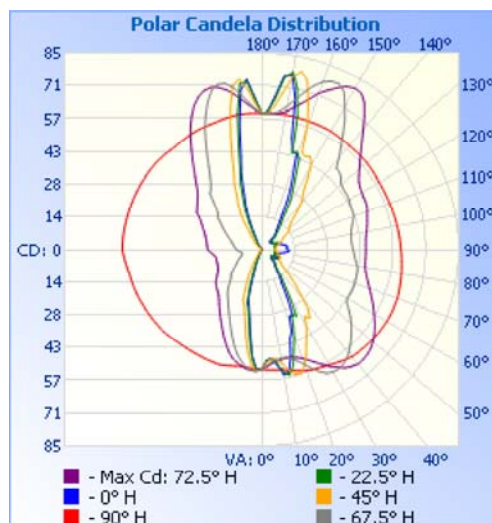


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	31.2	11%
0-40	46.7	16.4%
0-60	79.1	27.8%
60-90	53.4	18.7%
70-100	54.9	19.2%
90-120	55.4	19.4%
0-90	132.5	46.5%
90-180	152.6	53.5%
0-180	285.1	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	4.6	1.6%	90-100	18.7	6.6%
10-20	11.8	4.1%	100-110	18.5	6.5%
20-30	14.8	5.2%	110-120	18.2	6.4%
30-40	15.5	5.4%	120-130	18.2	6.4%
40-50	15.9	5.6%	130-140	18.4	6.5%
50-60	16.5	5.8%	140-150	18.9	6.6%
60-70	17.2	6.0%	150-160	19.1	6.7%
70-80	17.7	6.2%	160-170	16.3	5.7%
80-90	18.4	6.5%	170-180	6.3	2.2%

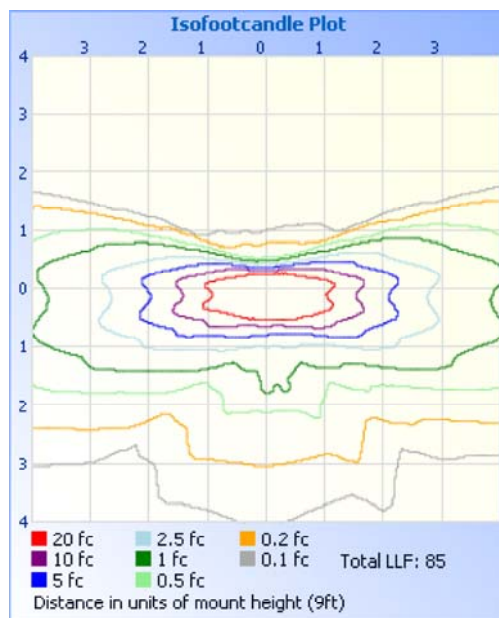

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5R	23.2 fc	
3.0R	5.79 fc	
4.5R	2.57 fc	
6.0R	1.45 fc	
7.5R	0.93 fc	
9.0R	0.64 fc	