



1 3/4" DELTA SCREW CAP WITH .045 PULP SILITE LINER

Part #: 1250


Size:	1 3/4"
Color:	SILVER
Material:	METAL/TIN
Style:	SCREW CAP
Additional Info:	SILITE LINER
Case Pack:	2,300/EA
Pallet Pack:	-

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet
Illing Part# 1250

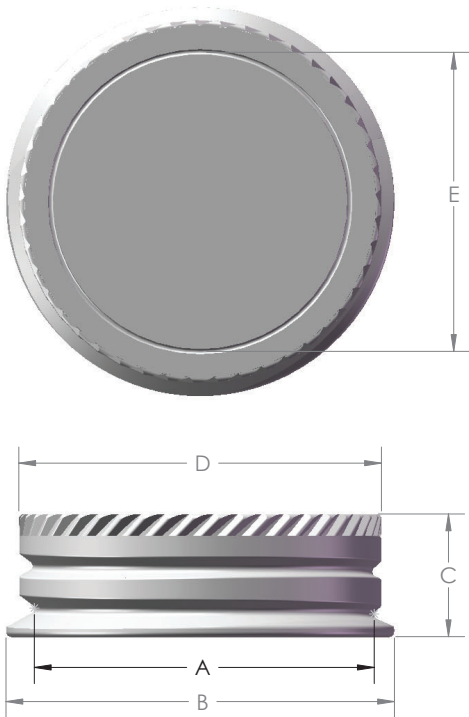

Size	A	B	C	D	E	Pitch	Plate
1"	.980 ϕ $\pm .005$	1.150 ϕ $\pm .010$	.435 $\pm .010$	1.057 ϕ $\pm .010$	.781 ϕ	7	90#
1-3/4"	1.712 ϕ $\pm .005$	1.900 ϕ $\pm .010$	.510 $\pm .010$	1.811 ϕ $\pm .010$	1.490 ϕ	6	90#

VBC, Inc. 156 Sanford St. Brooklyn, NY 11205

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
VBC, Inc. ANY REPRODUCTION IN
PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
VBC, Inc. IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	DATE	TITLE: Delta Cap Specifications			
		DIMENSIONS ARE IN INCHES	DRAWN	GM				06/28/17
		TOLERANCES:	CHECKED	AS				06/28/17
		FRACTIONAL ±	ENG APPR.	GM				06/28/17
		ANGULAR: MACH ± BEND ±	MFG APPR.	VSS				06/28/17
		TWO PLACE DECIMAL ±	Q.A.	AS				06/28/17
		THREE PLACE DECIMAL ±	COMMENTS:			SIZE DWG. NO. REV		
		INTERPRET GEOMETRIC TOLERANCING PER:						
		MATERIAL	Tinplated Steel					
NEXT ASSY	USED ON	FINISH	Polished			A022 A		
APPLICATION		DO NOT SCALE DRAWING						
					ND-1001-S			

SIZE	DWG. NO.	REV
A	022 A	
ND-1001-S		

5 4 3 2 1



PRODUCT DATA SHEET

YELLOW SILITE/45P

- YELLOW SILITE/45P is pulp backed primary liner with a barrier facing consisting of yellow paper and Polyester (PET) film.

Typical Product Attributes

Construction

Pulp Yellow Paper Polyester		SI (µm)	US (Mils)
		1143,0 100,3 38,1	45.0 4.0 0.9
Thickness Tolerance		± 10%	± 10%
Minimum Width		25,4 mm	1.0 in
Width Tolerance		± 1,6 mm	± 0.0625 in

Properties

Oxygen Transmission (O ₂ TR)	≤ 3.55 cc / 100 in ² / 24 h @ 1 ATM
Water Vapor Transmission (WVTR)	≤ 1.49 g / 100 in ² / 24 h @ 100°F, 90% RH

Regulatory Compliance

FDA Compliance	21 CFR 177.1630 Polyethylene phthalate polymers. 21 CFR 177.1210 Closures with sealing gaskets for food containers. 21 CFR 176.180 Components of paper and paperboard in contact with dry foods. 21 CFR 176.170 Components of paper and paperboard in contact with aqueous and fatty foods. Will be added to a DMF upon request for a Letter of Authorization (LOA).
Drug Master File (DMF)	USFDA Food Allergen Guidelines California Proposition 65 Labeling Requirements Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11
Other Compliances	Safety Data Sheets (SDS) are not required for articles as defined in 29 CFR 1910.1200, the OSHA Hazard Communication Standard (HazCom). This product is an article as defined by HazCom and is not considered to be, or to contain, a hazardous chemical based on evaluations made by our company.
Safety Data Sheet (SDS) Statement	

Please note that construction does not reflect adhesive or resin bonding layers, if present.

Revision Number: 2
Revised Date: 2019-02-06

DISCLAIMER: This information is believed to be accurate at the time of printing and is subject to change without notice. Providing this information does not convey any licenses under any patent rights or intellectual property rights of Tri-Seal or others. TRI-SEAL MAKES NO WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THIS INFORMATION AND DISCLAIMS ALL LIABILITY FROM RELIANCE ON IT. Tri-Seal's only warranties for this product are those written warranties as may be agreed to by Tri-Seal and its customers. TRI-SEAL SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.