

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

2231IRR

FLEXSPOUT WITH IRRADIATION / FS10-10-237,GRAY,STD RET

Part #: 2231IRR

Size:	FLEXSPOUT II ASSEMBLY
Color:	GRAY, CLEAR, SILVER
Material:	SEE BELOW
Style:	FLEXSPOUT WITH IRRADIATION
Additional Info:	FS10-10-237,GRAY,STD RET
Case Pack:	625 / EACH
Pallet Pack:	11,250 / EACH



www.illingpackaging.com

Represented by




ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

2231IRR

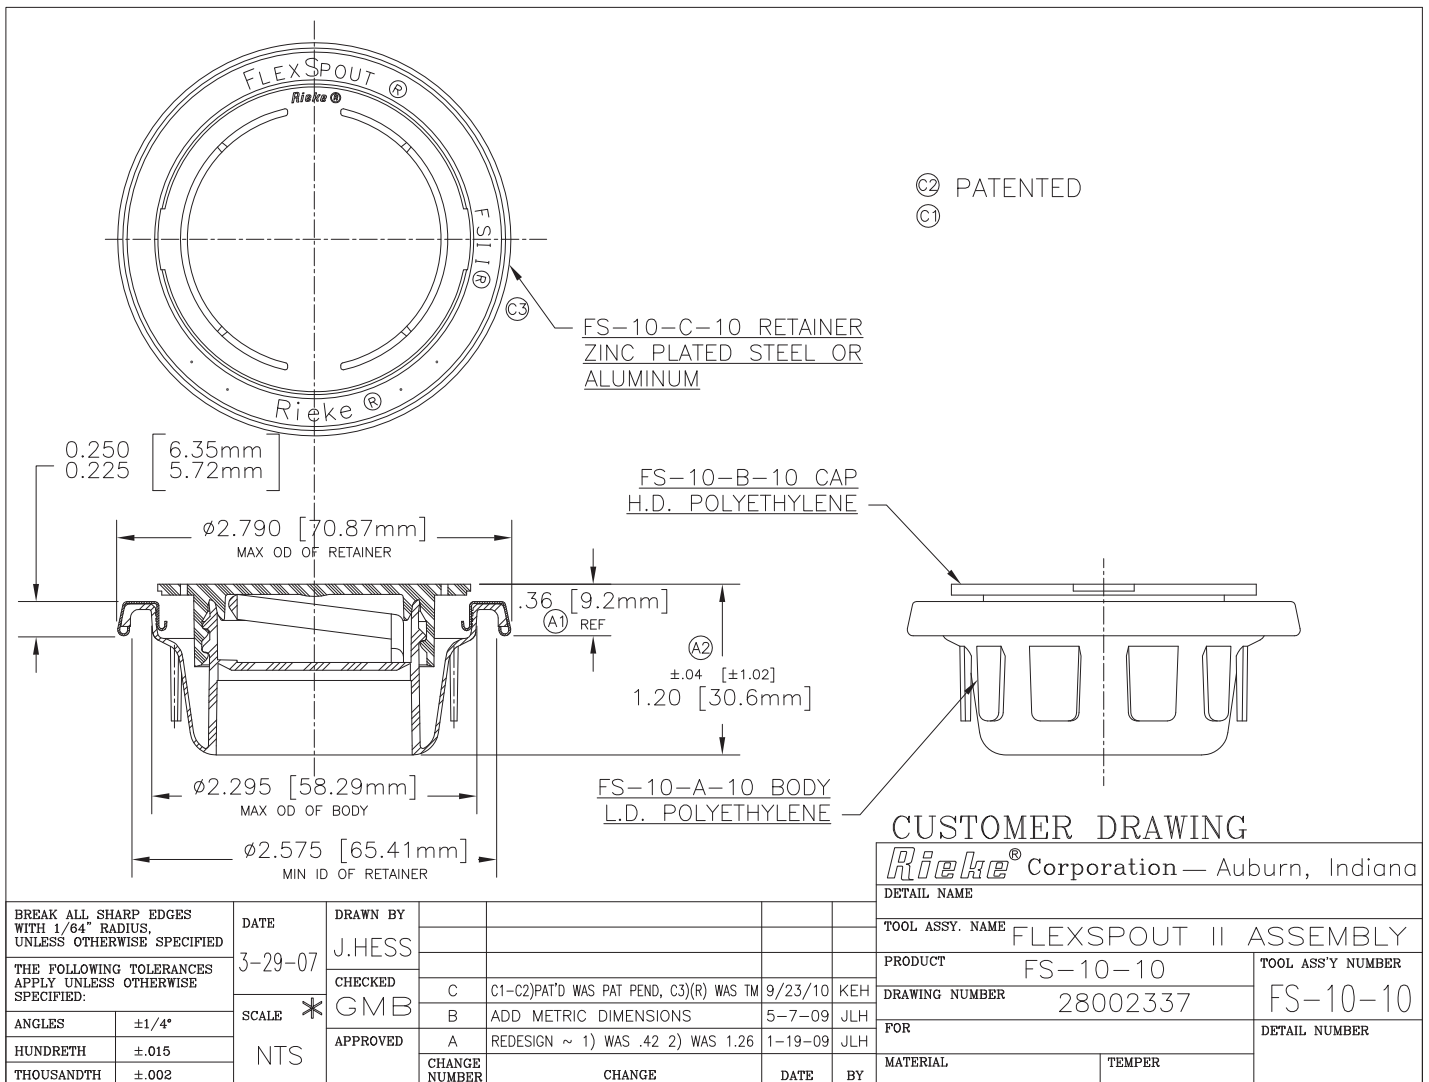


TriMas

PACKAGING

FS-10-10 Series Product Bulletin

Description	FS-10-10 FlexSpout Series; applies to all products with product numbers 0316xxxx
Applicable Drawings	Plastic opening – 18000338 Steel opening – 18000012 Product – 28002337 FMD Product - 28003669
Materials And Standard Colors	Gray high density polyethylene cap Natural low density polyethylene body Zinc plated or aluminum retainer Other options available (see below section) – may incur an additional charge
Application	This closure must be crimped onto the opening using one of the following Rieke crimping tools: FS-600, IAFS 600, IAFS 600-A, IAFS 600-B, IAFS 600-01A, IAFS 800-01
Packaging	Component weight – 27 grams +/- 10% Carton quantity (pieces) – 625 Carton weight – Approximately 40 lbs. Pallet quantity (pieces) – 11,250 Pallet quantity (carton) – 18
Additional Options And Information	Do not expose to temperatures exceeding 125°F Maximum print area is 1.36" or 24.5mm in diameter Additional cap colors Custom cap printing Fluorinated or irradiated body Flame mitigation device (FMD) – Certified to ASTM F3429M-24 PV-TFE-1 or TFE-HP2 microporous vents PV-21 Buna or PV-21 EPDM pressure/vacuum vents

	FDA	REACH	RoHS	TSCA	CONEG	PROP 65	BSE/TSE	BPA	Dodd-Frank	FALCPA
Contact Surfaces										
Resins	X	X	X	X	X	X	X	X		X
Colorant	X	X	X	X	X	X	X	X		X
TFE Vent	X	X	X	X	X	X	X	X		
PV-21 Vent	X		X	X	X	X	X	X		
Non-Contact Surfaces										
Retainer									X	
Ink										

Effective Date January 29, 2024; supersedes all previous revisions

The information contained above is provided in good faith. Rieke will not be liable for any damages resulting from the use of or reliance upon this information. It is the responsibility of the customer to ensure the products purchased are suitable for use under all actual use conditions. In no case, should any ratings of a product be construed to imply proper suitability with any chemical, package use, or performance.



Correspondence Address

Rieke Auburn

500 W 7th St, Auburn, IN 46706, USA

+1 260 925-3700

www.riekepackaging.com

Legal Entity

Rieke LLC No.: 197802-300

Registered: Corporation Service Company

Registered Agent Address: 135 North

Pennsylvania Street, Suite 1610, Indianapolis, IN, 46204