



120 MM WHT DEEP SKIRT CT LUG CAP .020 PULP FSM-1

Part #: 3600WDS

Size:	120 MM
Color:	White
Material:	PP
Style:	Smooth Top, Deep Skirt
Additional Info:	2 pc Pulp Backed Heat Induction Foil Seal
Case Pack:	304 each
Pallet Pack:	15,000 each


MEDIUM & DEEP SKIRTED CLOSURES

120-DCT-76 S



Specifications:

DIAMETER 120 mm

THREAD PROFILE DCT

NECK FINISH 120-DCT

CLOSURE TOP Smooth

CLOSURE SIDEWALL: Broad-ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	304	15	4,560	23 ⁽¹⁾	340 ⁽¹⁾	125 ⁽¹⁾
Stack	304	15	4,560	25 ⁽²⁾	373 ⁽²⁾	125
CARTON DIMENSIONS: 24 x 16 x 15			PALLET DIMENSIONS: 48 x 40 x 50			

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Nutritional Powders and Nutraceuticals.

OPTIONS

Available in white, standard colors and custom colors. Can be lined with a wide variety of liner systems including SureSeal (foam), pressure sensitive and heat induction (foil) liners.

CLOSURE BENEFITS

- Nested-stacking feature
- Broad-ribbed sides are easier to grip
- Popular for nutritional powders
- Stocked in white (colors available)


PHOENIX™


PHXPKG.COM

 P 630 420 4750 E greatpkg@phxpkg.com
 1899 High Grove Lane Naperville, IL 60540



MEDIUM & DEEP SKIRTED CLOSURES

120-DCT-76 S

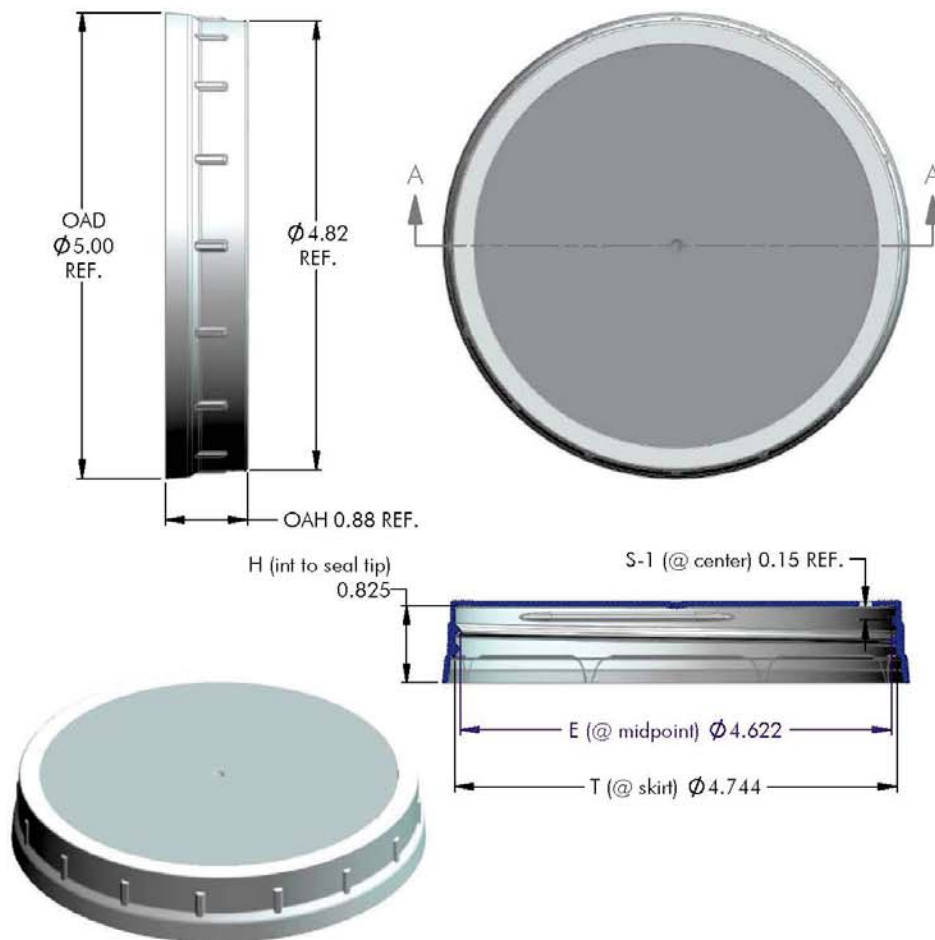


NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				3	12.03.18	Update profile for Improved Economics	TS
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				REV	DATE	DESCRIPTION	BY
TOLERANCE				PITCH/TPI	200 / 5	TURNS	1-1/2
X ±0.1				MAT'L	PP	DATE	09.06.18
XX ±0.02				DRAWN	TCS	SCALE	3/4 : 1
XXX ±0.010				REV			
				120 - DCT - 76 S			3





MEDIUM & DEEP SKIRTED CLOSURES

120-DCT-76 S

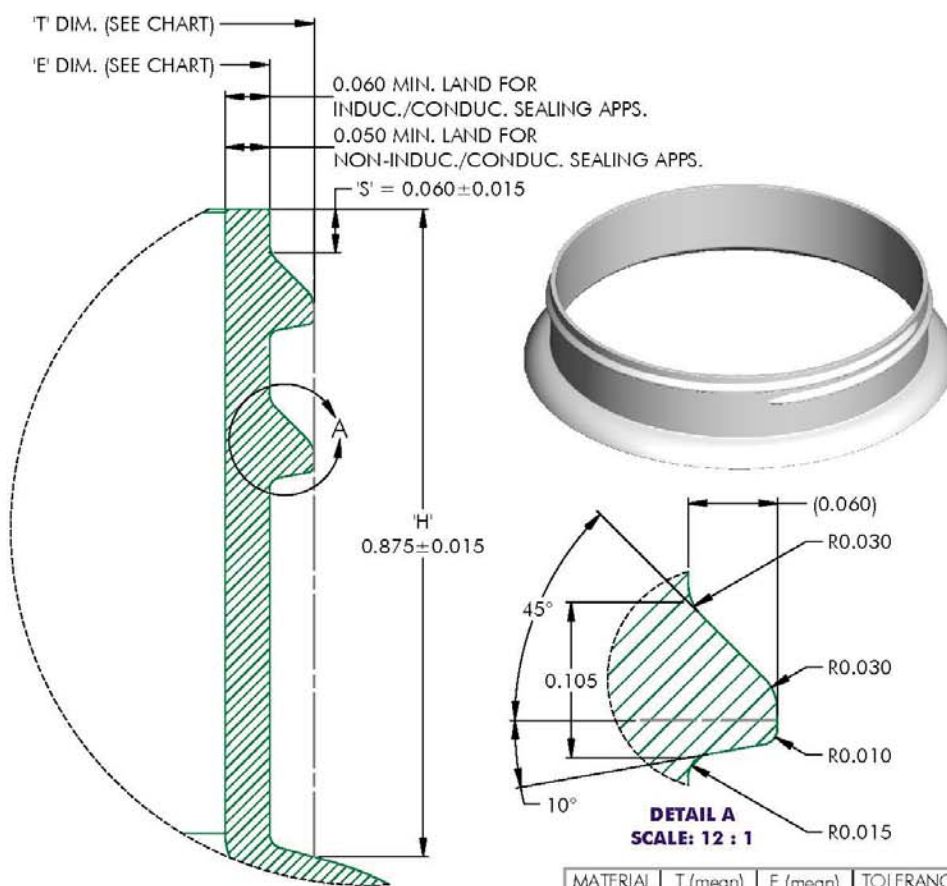

MATERIAL	T (mean)	E (mean)	TOLERANCE
PP / PE	4.707	4.587	± 0.018
PET	4.710	4.590	± 0.015
GLASS	N/A	N/A	± N/A

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.	0	04.10.15	Released				DN
	REV	DATE	DESCRIPTION				BY
	TOLERANCE	PITCH/TPI		.200 / 5	TURNS	1-1/8	MATL SEE CHART
	X	±0.1	DRAWN	DMN	DATE	04.10.15	SCALE 6 : 1
	XX	±0.02					
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.	XXX	±0.010					
	120 - DCT - FINISH						0



Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3600WDS



*Freshness and Protection
for Today's Packaging*

FoilSealTM Data Sheet

.020" Pulp FSM-1

Revision: FSM1-01182007

Product	.020" Pulp FSM-1		
Scope	Two piece pulp backed heat induction foil innerseal that will provide a tamper-evident bond to polyethylene containers.		
Composition	Material	Standard	Metric
	Backing	.020"	.508 mm
	Wax	-	-
	Foil	.001"	.0254mm
	PET	.0005"	.0127mm
	Heat Seal	.0015"	.0381mm
			Composition does not include adhesive, resin or wax bonding layers (if any).
FDA Status:	21 CFR 177.1210	Recommended Storage and Handling:	
Drug Master File (DMF):	#4544	Canadian DMF:	EU / EP Reg.:
GTR Oxygen:	Essentially Zero	MVTR:	Essentially Zero
Print Locatoin (if any):	Foil Layer and/or Heat Seal Layer		

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

Manufacturing & Customer Service:

342 E. Wabash St.
Forrest, IL 61741, USA
Phone: +1 (815) 657-8233
Fax: +1 (815) 657-7584

North American Sales:

2132 Deep Water Lane
Naperville, IL 60564, USA
Phone: +1 (630) 922-3158
Fax: +1 (630) 922-8469
www.seligsealing.com

Selig Europe:

Warrington Road
High Legh
Nr Knutsford
Cheshire WA16 0RT
Telephone: +44 (0)1925 752600
Fax: +44 (0)1925 757527

