

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3601HSPE

110-400 WHT PP RIBBED CAP WITH HEAT SEAL TRI-TAB LINER FOR PE

Part #: 3601HSPE

Size:	110-400 NECK
Color:	WHITE
Material:	PP
Style:	RIBBED CAP
Additional Info:	HEAT SEAL TRI-TAB LINER FOR PE
Case Pack:	333 / EACH
Pallet Pack:	4,995 / EACH



www.illingpackaging.com

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3601HSPE

 CLASSIC

SHALLOW SKIRTED CLOSURES

110-400-9613 S



Specifications:

DIAMETER 110 mm

THREAD PROFILE 400

NECK FINISH 110-400

CLOSURE TOP Stipple

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP, PCR PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	333	15	4,995	17 ⁽¹⁾	257 ⁽¹⁾	150 ⁽¹⁾
Stack	333	15	4,995	20 ⁽²⁾	293 ⁽²⁾	125 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Agricultural, Automotive, Industrial, and Medical Products, Food, Food Service, Personal Care & Cosmetics, Pharmaceuticals, Peanut Butter & Nuts, Powdered Drinks, Dressings & Sauces.

OPTIONS

Available in white, standard, and custom colors.
Liners can be cut with tri-tab easy-open feature
Can be embossed/debossed with custom message.
Offset printing is available in up to four colors.
Optional 25-30% food-contact safe PCR PP material available.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Our most popular closure style
- Utilized for peanut butter



PHOENIXTM

PHXPKG.COM


P 630 420 4750 E greatpkg@phxpkg.com
975 Meridian Lake Drive • Aurora, IL 60504

2025.01.17



SHALLOW SKIRTED CLOSURES

110-400-9613 S

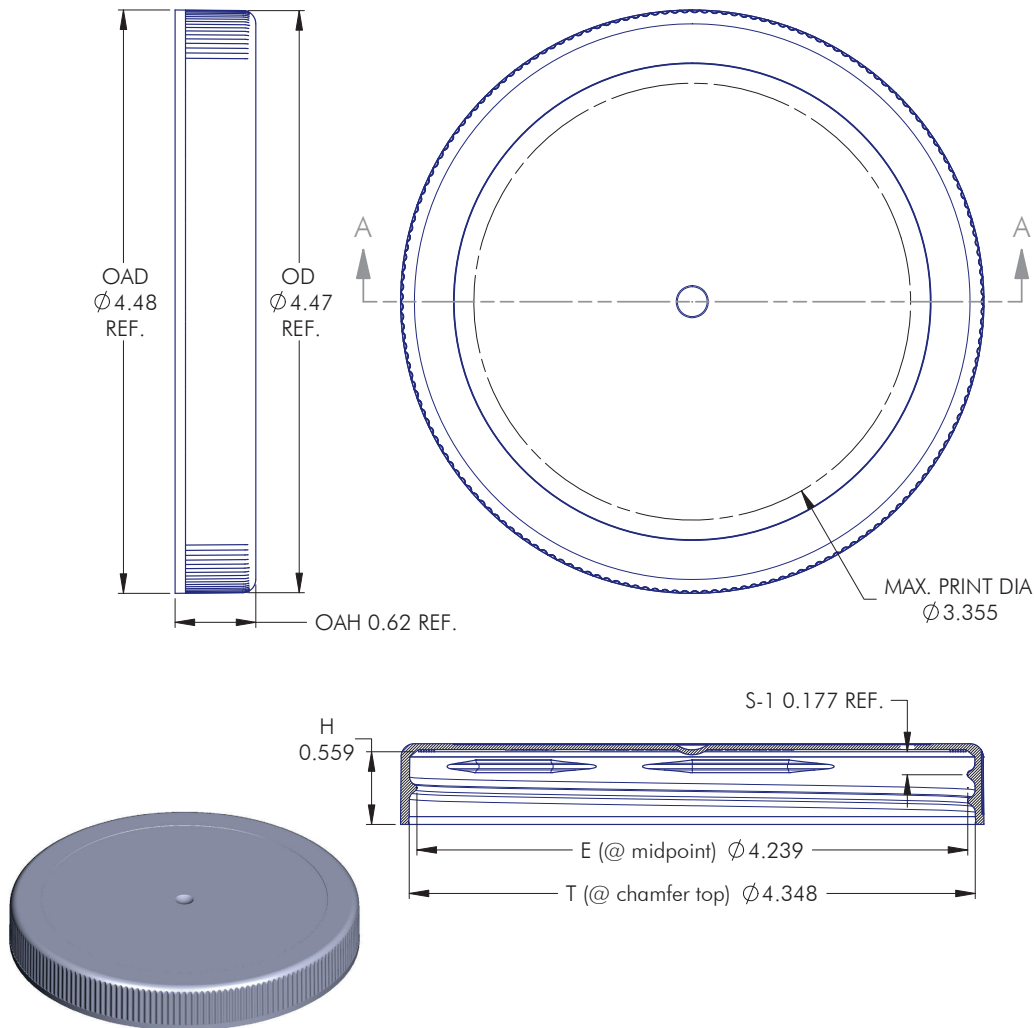

NOTES: (UNLESS OTHERWISE SPECIFIED)
 1. ALL DIMENSIONS ARE IN INCHES.
 2. SEE CHART FOR DIMENSIONAL TOLERANCE.

THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.


4	01.17.25	Updated top wall thickness. ECN/ECR #3065			LD
REV	DATE	DESCRIPTION			BY
TOLERANCE	PITCH/TPI	.200 / 5	TURNS	1-1/4	MATL PP
.X ±0.1	DRAWN	DMN	DATE	06.29.09	SCALE 1 : 1
.XX ±0.02	110 - 400 - 9613 S			REV	4
.XXX ±0.010					





SHALLOW SKIRTED CLOSURES

110-400-9613 S

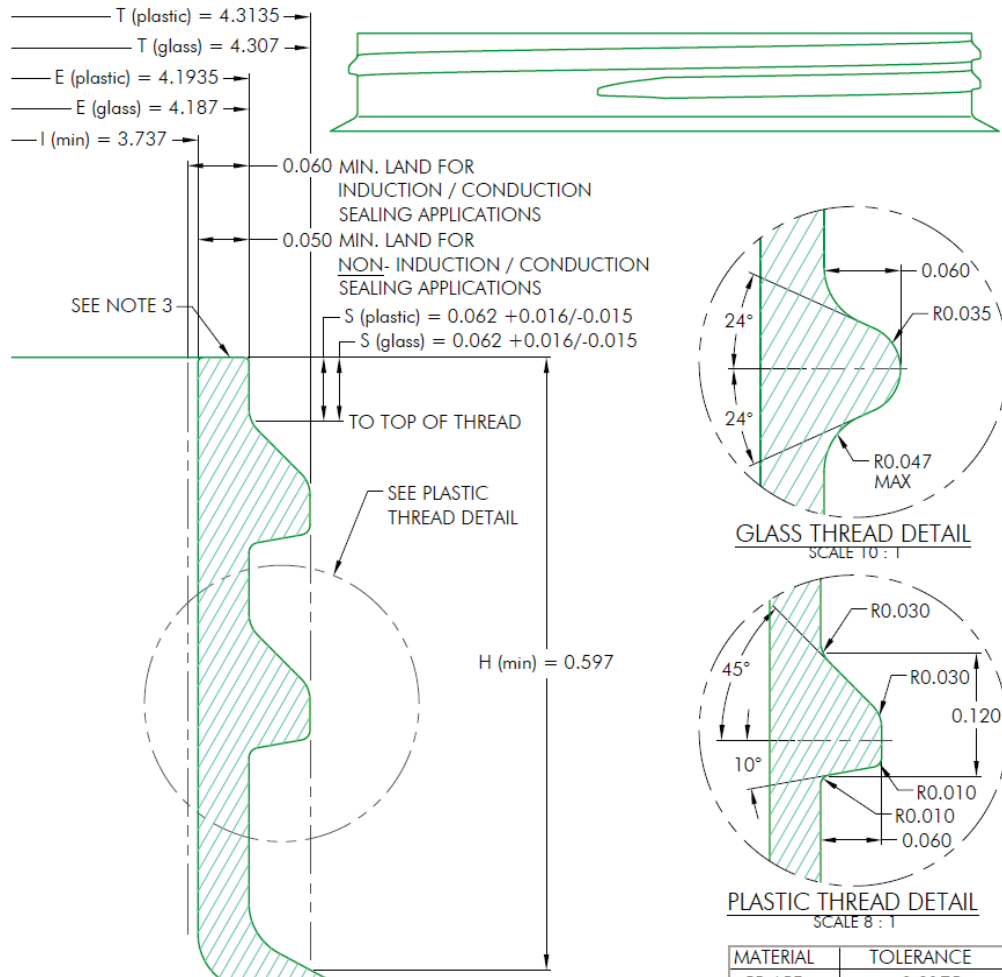

MATERIAL	TOLERANCE
PP / PE	± 0.0175
PET	± 0.012
GLASS	± 0.024

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				0	11.17.97	Released	BZ
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				REV	DATE	DESCRIPTION	BY
TOLERANCE	PITCH/TPI	200 / 5	TURNS	1-1/4	MATL	Per Chart	
.X ±0.1	DRAWN	BEZ	DATE	11.17.97	SCALE	8:1	REV
.XX ±0.02	110 - 400 - FINISH						
.XXX ±0.010							0

