



100- 400 WHITE PP FINE RIBB CAP W STIPPLE TOP AND S 105 FOIL HEAT SEAL 4-6 LINER

Part #: 3605W

Size:	100 - 400 NECK
Color:	WHITE
Material:	PP
Style:	CAP FINE RIBBED; STIPPLE TOP
Additional Info:	S 105 FS 4-6 HEAT SEAL LINER
Case Pack:	500 / EACH
Pallet Pack:	7,500 / EACH

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3605W



SHALLOW SKIRTED CLOSURES

100-400-9613 S



Specifications:

DIAMETER 100 mm

THREAD PROFILE 400

NECK FINISH 100-400

CLOSURE TOP Stipple

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP, PCR PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	500	15	7,500	18 ⁽¹⁾	272 ⁽¹⁾	175 ⁽¹⁾
Stack	500	15	7,500	22 ⁽²⁾	330 ⁽²⁾	175 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Automotive, Industrial and Medical Products,
Food, Food Service, Personal Care & Cosmetics,
Pharmaceuticals, Nutraceuticals, Dressings &
Sauces and Powdered Drinks.

OPTIONS

Available in white, standard, and custom colors.
Can be embossed/debossed with custom message.
Offset printing is available in up to four colors.
Optional 25-30% food-contact safe PCR PP
material available.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Our most popular closure style



PHOENIXTM

PHXPKG.COM


P 630 420 4750 E greatpkg@phxpkg.com
975 Meridian Lake Drive • Aurora, IL 60504

2024.01.23



SHALLOW SKIRTED CLOSURES

100-400-9613 S

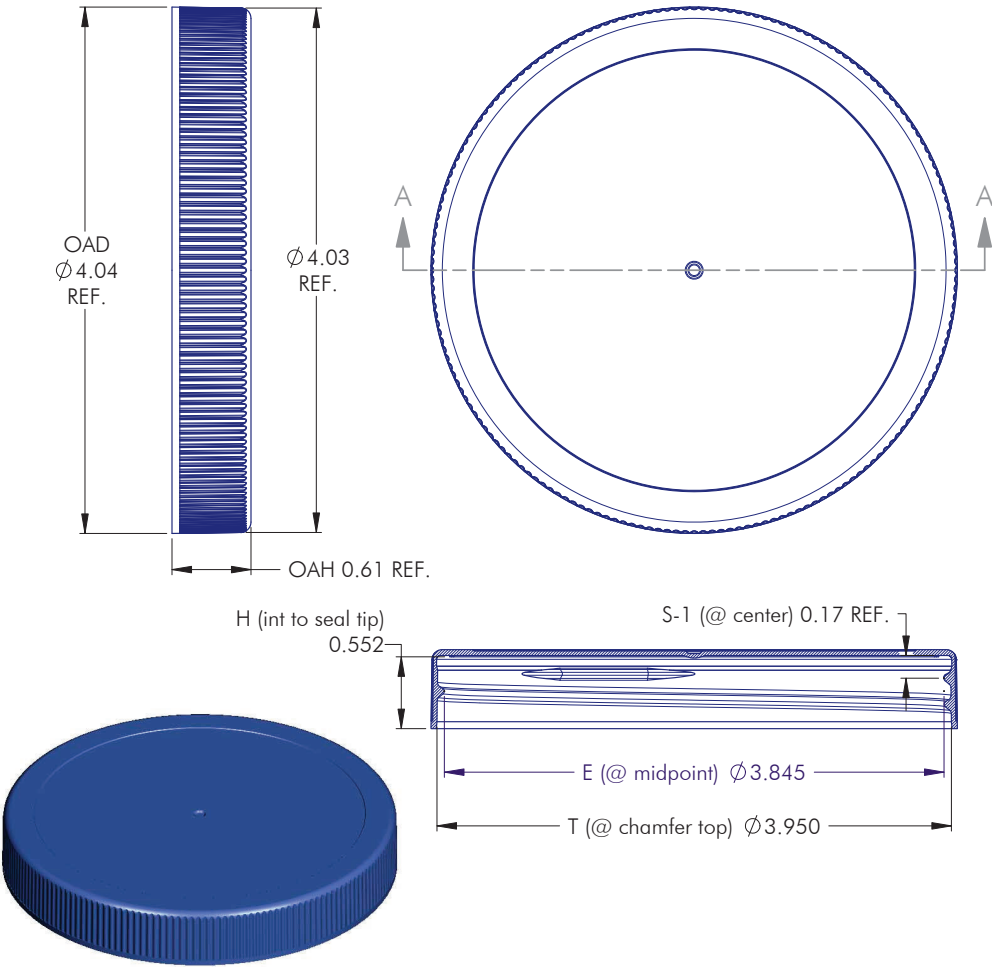


NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE. THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.	1	03.12.15	Redefine Reference Dimensions					DN
	REV	DATE	DESCRIPTION					BY
	TOLERANCE	PITCH/TPI	.200 / 5	TURNS	1-3/16	MAT'L	PP	
	.X ±0.1	DRAWN	DMN	DATE	10.31.06	SCALE	1 : 1	REV
	.XX ±0.02							
	.XXX ±0.010	100 - 400 - 9613 S						1





SHALLOW SKIRTED CLOSURES

100-400-9613 S

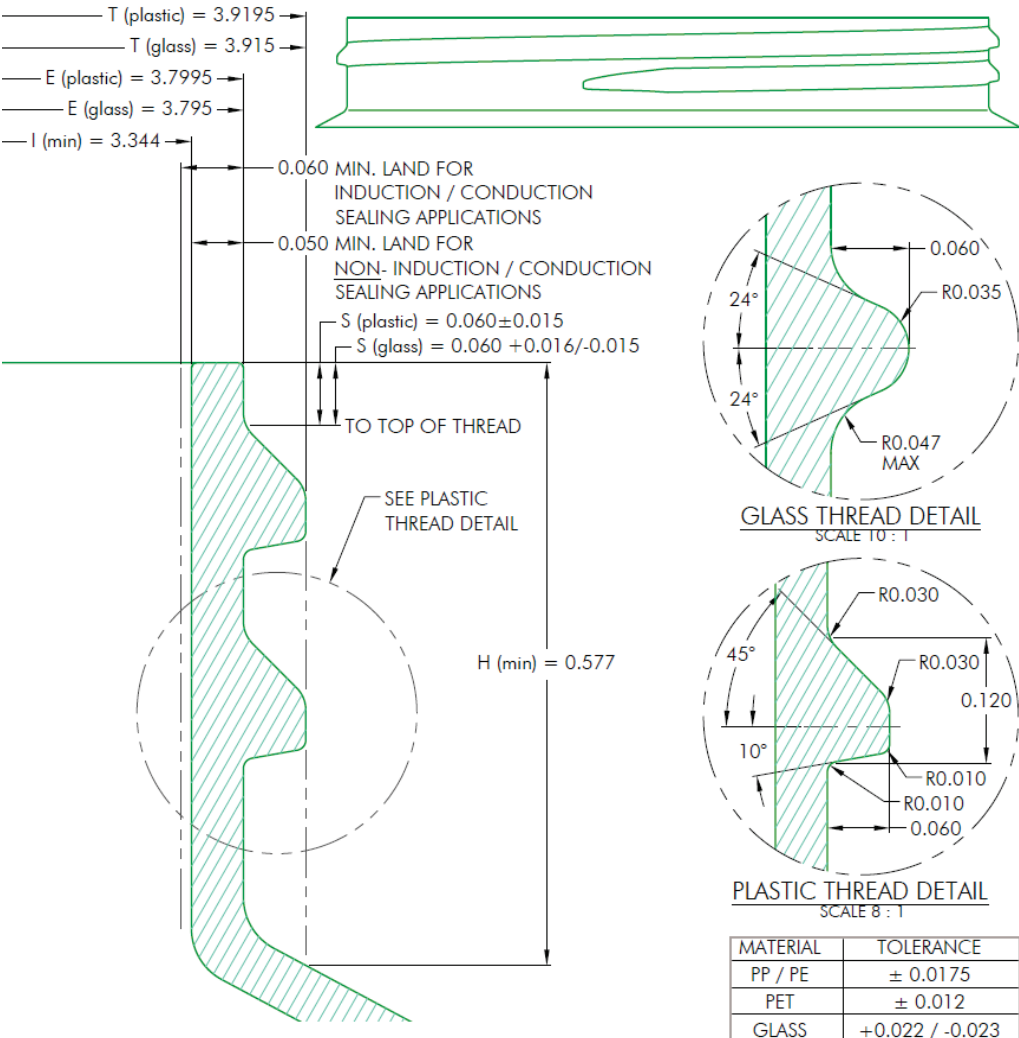

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				0	05.23.03	Released	BZ
				REV	DATE	DESCRIPTION	BY
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				TOLERANCE	PITCH/TPI	200 / 5	TURNS 1-1/4
				.X	±0.1	DRAWN	BEZ
				.XX	±0.02	DATE	05.23.03
				.XXX	±0.010	SCALE	8 : 1
				100 - 400 - FINISH			0



Represented by



Product Specification Sheet

Illing Part#


3605W



FoilSeal™ Data Sheet

S105 FS 4-6

Revision: FS46-06032010

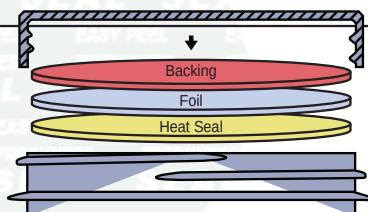Product	S105 FS 4-6														
Scope	One piece foam backed heat induction foil innerseal which will provide a tamper-evident bond to PP containers. Easy access / "puncture foil" when wax bonded to pulp.														
Composition	<table><thead><tr><th>Material</th><th>Standard</th><th>Metric</th></tr></thead><tbody><tr><td>Backing</td><td>.0105"</td><td>.2667mm</td></tr><tr><td>Foil</td><td>.001"</td><td>.0254mm</td></tr><tr><td>Heat Seal</td><td>.0015"</td><td>.0381mm</td></tr></tbody></table>	Material	Standard	Metric	Backing	.0105"	.2667mm	Foil	.001"	.0254mm	Heat Seal	.0015"	.0381mm		
	Material	Standard	Metric												
Backing	.0105"	.2667mm													
Foil	.001"	.0254mm													
Heat Seal	.0015"	.0381mm													
Composition does not include adhesive, resin or wax bonding layers (if any).															
FDA Status:	21 CFR 177.1210	Recommended Storage and Handling:													
Drug Master File (DFM):	#4544	Canadian DMF:	EU / EP Reg.:												
GTR Oxygen:	Essentially Zero	MVTR:	Essentially Zero												
Print Location (if any):	Heat Seal Layer and/or Backing														

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

USA Manufacturing
342 E Wabash Ave.
Forrest, IL 61741, USA
Phone: +1 (815) 785-2100
Fax: +1 (815) 657-7584

North American Sales
150 N Martingale Rd, Suite 860
Schaumburg, IL 60173, USA

European Sales and UK Manufacturing
635-637 Ajax Avenue
Slough Trading Estate
Slough Berkshire SL1 4BH UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canada Manufacturing
100 Industrial Rd
Bradford, Ontario L3Z 3G7 Canada
Phone: +1 (905) 727-0114
Fax: +1 (905) 727-8544

Switzerland Manufacturing
Bahnhofstrasse 13
8172 Niederglatt
Phone: +41 (0) 44 851 50 50
Fax: +41 (0) 44 851 50 51