

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3611UHSFPE

89-400 WHITE CAP HEAT SEAL PE & FOAM SURESEAL

Part #: 3611UHSFPE

Size:	89-400 NECK
Color:	WHITE
Material:	PE
Style:	CAP
Additional Info:	HEAT SEAL PE & FOAM SURESEAL
Case Pack:	624 / EACH
Pallet Pack:	9,360 / EACH

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3611UHSFPE

SHALLOW SKIRTED CLOSURES

89-400-9613 S



Specifications:

DIAMETER 89 mm

THREAD PROFILE 400

NECK FINISH 89-400

CLOSURE TOP Stipple

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	624	15	9,360	20 ⁽¹⁾	296 ⁽¹⁾	125 ⁽¹⁾
Stack	624	15	9,360	23 ⁽²⁾	296 ⁽²⁾	125 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Food, Food Service, Agricultural, Automotive, Industrial and Medical Products, Dressings & Sauces, Personal Care & Cosmetics, Soup Base, Pharmaceuticals, Nutraceuticals & Powdered Drinks.

OPTIONS

Available in white, standard, and custom colors. Liners can be cut with a pull-tab or tri-tab easy-open feature.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Our most popular closure style



PHOENIXTM


PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
1899 High Grove Lane Naperville, IL 60540



SHALLOW SKIRTED CLOSURES

89-400-9613 S

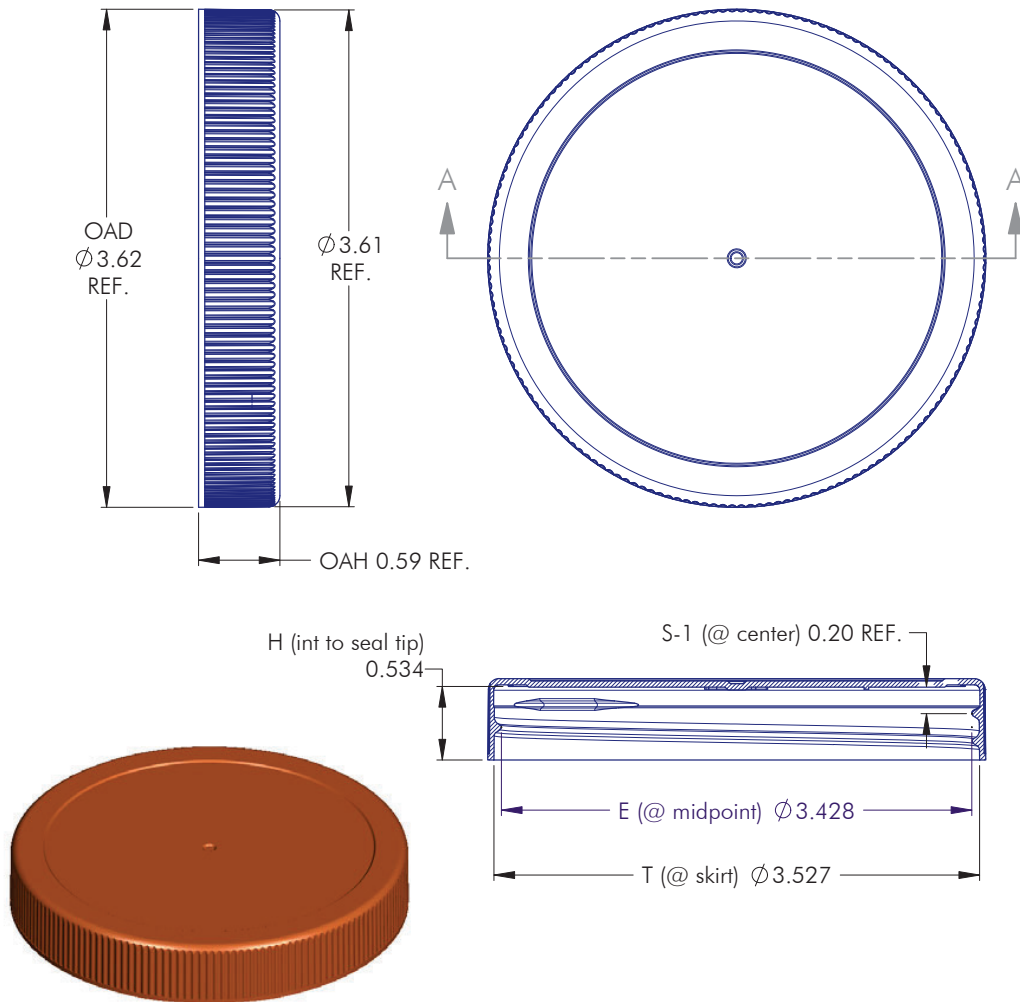


NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				4	04.08.15	Re-define Reference Dimensions	DN
				REV	DATE	DESCRIPTION	BY
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				TOLERANCE	PITCH/TPI	TURN	MAT'L
				.X	±0.1	5	PP
				.XX	±0.02		
				.XXX	±0.010		
				DRAWN	DATE	SCALE	REV
				DMN	07.27.06	1 : 1	4
				89 - 400 - 9613 S			



SHALLOW SKIRTED CLOSURES

89-400-9613 S

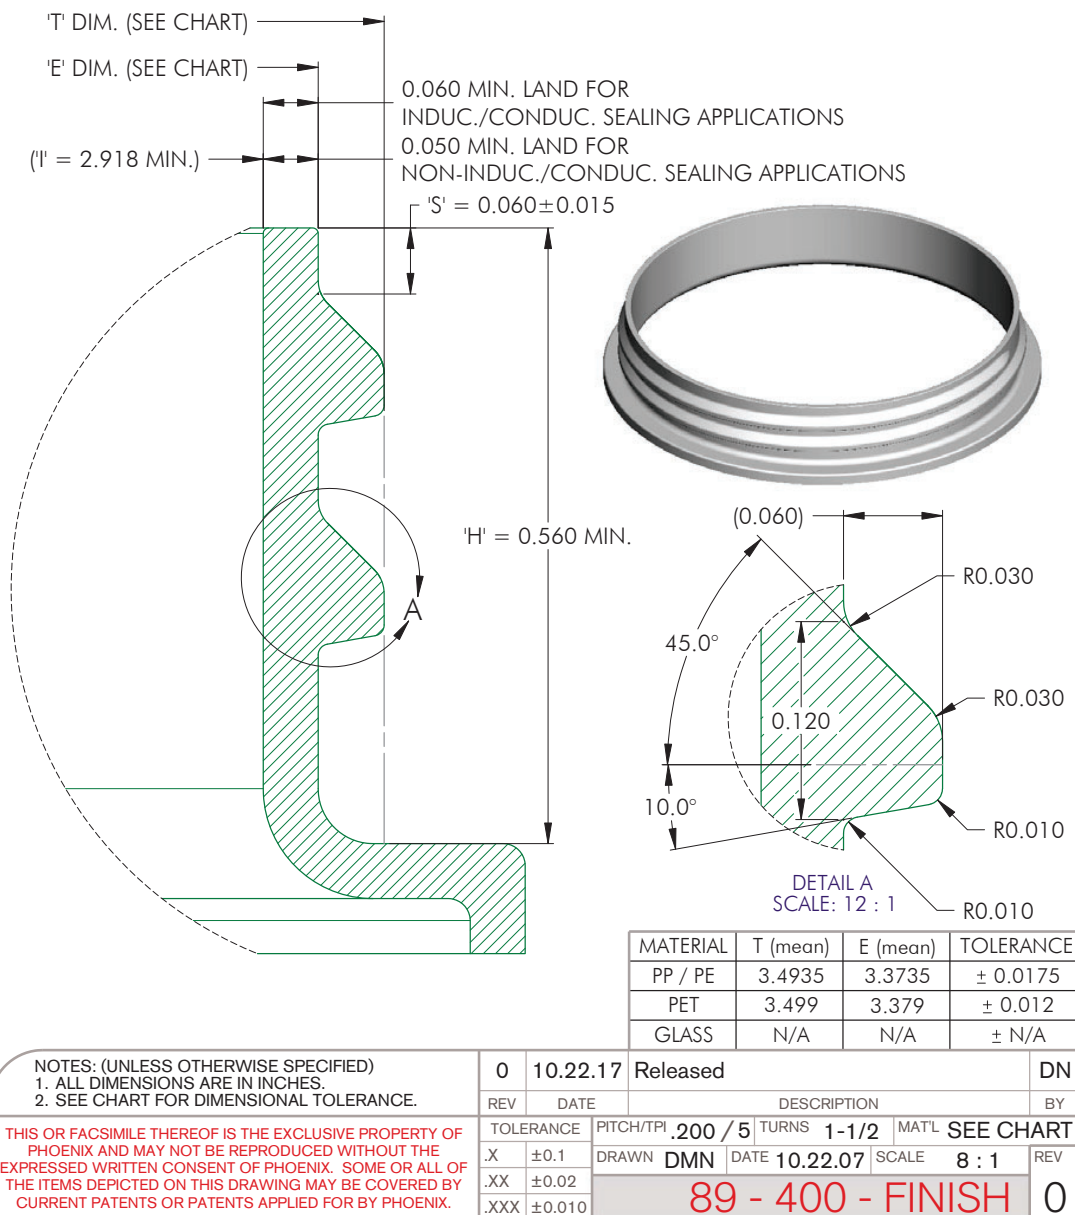

Represented by



Product Specification Sheet

Illing Part#


3611UHSFPE



FoilSeal™ Data Sheet

.008" C1S FS1-16

Revision: FS116-06012010

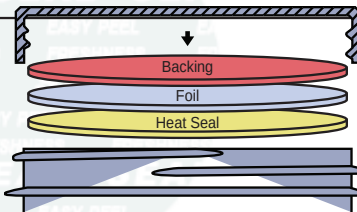Product	.008" C1S FS1-16		
Scope	One piece board backed heat induction foil innerseal will provide an aggressive bond with clean peel removal from PE and PP containers. (.0005" mil foil version of FS 1-13, easy access / "puncture foil" when wax bonded to pulp).		
Composition	Material	Standard	Metric
	Backing	.008"	.2032 mm
	Foil	.0005"	.0127 mm
	Heat Seal	.002"	.0508 mm
			
Composition does not include adhesive, resin or wax bonding layers (if any).			
FDA Status:	21 CFR 177.1210	Recommended Storage and Handling:	
Drug Master File (DFM):	#4544	Canadian DMF:	EU / EP Reg.:
GTR Oxygen:	Essentially Zero	MVTR:	Essentially Zero
Print Location (if any):	Heat Seal Layer and/or Backing		

Selig materials are compliant with current USFDA Food allergen Guidelines.
Selig materials are compliant with California Proposition 65 labeling requirements.
Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

USA Manufacturing
342 E. Wabash Ave.
Forrest, IL 61741, USA
Phone: +1 (815) 785-2100
Fax: +1 (815) 657-7584

North American Sales
150 N. Martingale Rd., Suite 860
Schaumburg, IL 60173, USA

European Sales and UK Manufacturing
635-637 Ajax Ave., Slough Trading Estate
Slough, Berkshire SL1 4BH, UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canada Manufacturing
100 Industrial Road
Bradford, Ontario Canada, 3LZ 3G7
Phone: +1 (905) 727- 0114
Fax: +1 (905) 727-8544



SureSeal®

Product Name:	SureSeal®
Product Type:	One piece, three-ply coextruded liner.
Material:	Low density polyethylene skin top and bottom with foamed polyolefin core.
Composition:	Core and outer skin fusion. Closed cell foam core of LDPE is sandwiched within LDPE. This results in a chemically fused, single polymeric product.
Composition Benefits:	Symmetrical construction - either side serves as the liner face. Single polymeric product - no ply-separation.
Application:	Applications have provided positive sealing for foods, beverages, pharmaceuticals, cosmetics, industrial and household chemicals.
Compatibility:	SureSeal® is chemically inert, odorless, tasteless and dust-free. Good resistance to acids, alkalies, slow solvents, alcohols, oils and aqueous products. Poor resistance to active hydrocarbon solvents.
Performance Values:	Excellent sealability, resiliency and compression recovery. Excellent torque retention.
Thickness/Width:	Available in thickness of .030" (+/- .005") Widths from 1" to 36" (+/- .031")
Density:	24 < 28 lbs/ft ³
Color:	FDA approved white. Custom colors available upon request.
FDA Status:	Drug Master File #12831. This material complies with FDA regulation 177.1520(c)3.1 for food contact application.