

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

36120

120-400 WHITE PP SMOOTH SIDED CT CAP WITH F-419M LINER

Part #: 36120

Size:	120-400
Color:	WHITE
Material:	POLYPROPYLENE
Style:	SMOOTH TOP; FINE RIB SIDES
Additional Info:	F-419M LINER
Case Pack:	333/EACH
Pallet Pack:	4,995/EACH



www.illingpackaging.com

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet




Illing Part#

36120

PRODUCTION RELEASE


RECESSED GATE

CHARMILLES #30
SURFACE WITHIN 4.375 ϕ

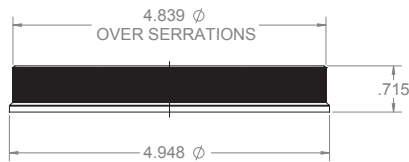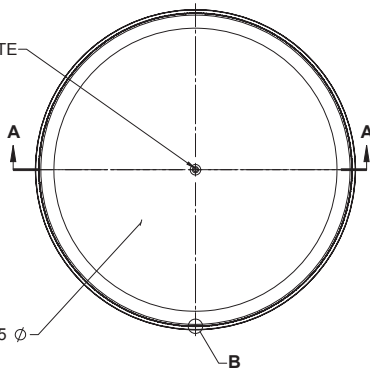


360 SERRATIONS

DETAIL B
SCALE 16 : 1

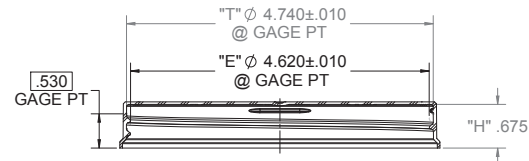

SECTION A-A



REV D - 1/9/2018 - DYH
#RCT170634

TOLERANCE UNLESS
SPECIFIED

xxx $\pm$ -.015

xx $\pm$ -.03

x $\pm$ -.1

Fractional $\pm$ -.1/8"

Angles $\pm$ -.1/2°

Berry

101 OAKLEY STREET
EVANSVILLE,
INDIANA 47706
TEL (812) 424-2904

NOT REDESIGNED BY BERRY

Reborn - 1/11/2018 3:10:30 PM

SIZE AND STYLE

CCC2400FMRE

DESCRIPTION

120mm CT LIGHTWEIGHT CLOSURE

PROJECT NO

CP-100215-PR02

DESIGNED BY

B.MARTIN

DATE

2010-04-30

ISSUED FOR

D

SCALE

1 of 1

SHEET NO

1:1

C

CUSTOMER

PROJECT NUMBER

100215

ISSUED FOR

D

SCALE

1 of 1

SHEET NO

1:1

C



PRODUCT DATA SHEET

F-419MTM

- F-419MTM is a coextruded primary liner consisting of a foamed Low-Density Polyethylene (LDPE) core sandwiched between two solid layers of High-Density Polyethylene (HDPE) and Low-Density Polyethylene (LDPE).
- Provides improved stiffness over products with Low-Density (LDPE) skins.
- Does not promote microbial growth.

Typical Product Attributes

Construction

Solid PE Foamed LDPE Solid PE		SI (µm)	US (mils)
		Total Thickness 762,0 – 3175,0	Total Thickness 30.0 – 125.0

Properties

Color	White or as specified	White or as specified
Appearance	Opaque	Opaque
Density	320 ± 32 kg/m ³	20 ± 2 lb./ft ³
Thickness Tolerance	± 127 µm ± 178 µm ± 254 µm	± 5 mil ± 7 mil ± 10 mil
Available Widths	25 – 1016 mm 25 – 229 mm ± 1,6 mm	1 – 40 in 1 – 9 in ± 0.0625 in

Regulatory Compliance

FDA Compliance	21 CFR 177.1520 Olefin polymers.
Drug Master File (DMF)	21 CFR 177.1210 Closures with sealing gaskets for food containers.
Other Compliances	Will be added to a DMF upon request for a Letter of Authorization (LOA).
Safety Data Sheet (SDS) Statement	USFDA Food Allergen Guidelines California Proposition 65 Labeling Requirements Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11 Meets the compositional requirements of Regulation (EU) 10/2011 on plastic materials and articles intended to come into contact with food
	Safety Data Sheets (SDS) are not required for articles as defined in 29 CFR 1910.1200, the OSHA Hazard Communication Standard (HazCom). This product is an article as defined by HazCom and is not considered to be, or to contain, a hazardous chemical based on evaluations made by our company.

Please note that construction does not reflect adhesive or resin bonding layers, if present.

VERSION	3	DATE	2021-07-26
---------	---	------	------------

DISCLAIMER: This information is believed to be accurate at the time of printing and is subject to change without notice. Providing this information does not convey any licenses under any patent rights or intellectual property rights of Tri-Seal or others. TRI-SEAL MAKES NO WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THIS INFORMATION AND DISCLAIMS ALL LIABILITY FROM RELIANCE ON IT. Tri-Seal's only warranties for this product are those written warranties as may be agreed to by Tri-Seal and its customers. TRI-SEAL SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.