

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3626WHTPP

63-400 WHT PP MATTE TOP WITH FINE RIB SIDES UNLINED CAP

Part #: 3626WHTPP

Size:	63-400
Color:	WHITE
Material:	PP
Style:	MATTE TOP W/FINE RIB SIDE CAP
Additional Info:	UNLINED
Case Pack:	1,500/EACH
Pallet Pack:	22,500/EACH



www.illingpackaging.com

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3626WHTPP

SHALLOW SKIRTED CLOSURES

63-400-6213 S



Specifications:

DIAMETER 63 mm

THREAD PROFILE 400

NECK FINISH 63-400

CLOSURE TOP Stipple

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Bulk	1,500	15	22,500	26 ⁽¹⁾	397 ⁽¹⁾	100 ⁽¹⁾
Bulk	1,500	15	22,500	30 ⁽²⁾	445 ⁽²⁾	100 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Agricultural, Automotive, Industrial, and Medical Products, Dressings & Sauces, Food, Food Service, Personal Care & Cosmetics, Pharmaceuticals, Nutraceuticals, Non-Dairy Creamer and Soup Base.

OPTIONS

Available in white, standard, and custom colors.
Liners can be cut with pull-tab easy-open feature.
Can be embossed/debossed with custom message.
Offset printing is available in up to three colors.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Our most popular closure style



PHOENIXTM


PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
1899 High Grove Lane Naperville, IL 60540



SHALLOW SKIRTED CLOSURES

63-400-6213 S

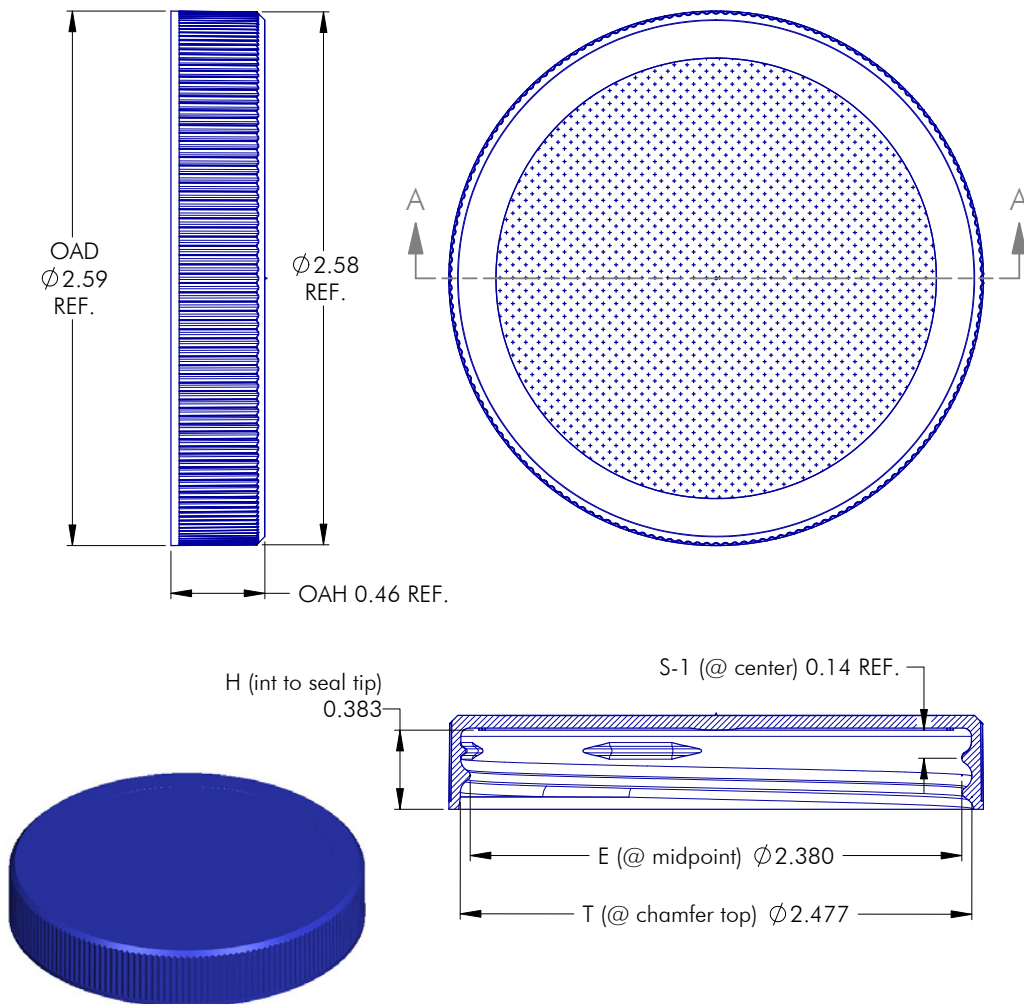

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				6	10.26.04	Update "E" Dimension		DN
				REV	DATE	DESCRIPTION		BY
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				TOLERANCE	PITCH/TPI	.167 / 6	TURNS	1-1/8
				.X	±0.1	DRAWN	DMN	DATE
				.XX	±0.02	06.26.02	SCALE	3 : 2
				.XXX	±0.010	63 - 400 - 6213 S	6	REV
				MAT'L		PP		





SHALLOW SKIRTED CLOSURES

63-400-6213 S

