

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#



36350B151

53MM-400 ORANGE(151C) PP CRC CAP PICTORIAL F-217 & PS-113

Part #: 36350B151

Size:	53-400
Color:	ORANGE PMS 151C
Material:	PP
Style:	CHILD RESISTANT CAP
Additional Info:	3-PLY LINER, FOAM SEAL
Case Pack:	700 EACH
Pallet Pack:	22,400 EACH

INNER INJECTION POLYPROPYLENE
OUTER INJECTION POLYPROPYLENE

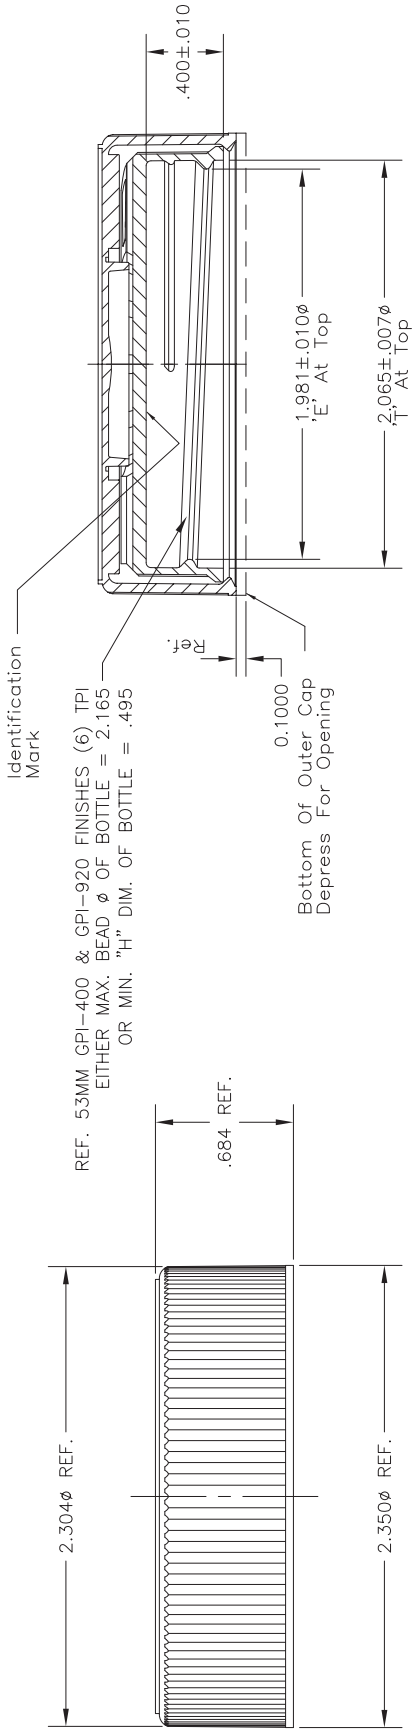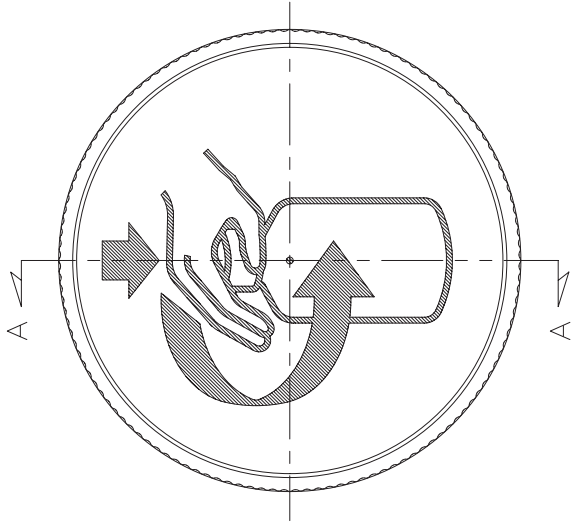


Section A-A

REFERENCE DIMENSIONS ARE NOT INSPECTED AND NO TOLERANCE APPLIED		INSPECTION DIMENSIONS ARE VERIFIED WITH TOLERANCE	
THIS DRAWING IS NOT A CONTROLLED DOCUMENT IF PRINTED OR COPIED FROM THE APPROVED LOCATION		CONFIDENTIAL	
BERRY		THIS UNPUBLISHED WORK IS THE PROPERTY OF BERRY GLOBAL, INC. AND IS PROTECTED BY TRADE SECRET. COPYRIGHT AND OTHER RIGHTS ARE RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM BERRY GLOBAL, INC. ANY UNAUTHORIZED REPRODUCTION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED AND WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.	
101 OAKLEY STREET EVANSVILLE INDIANA 47706 TEL: (812) 424-2904		CUSTOMER	
CK53CRTPTASY		DRAWING TYPE	
DESCRIPTION		PROJECT NUMBER	
DRAWING NO:		CP-030249-C	
CREATED BY:		OPERATION DATE	
BCH		03/05/03	
E		A	
F		1 of 1	
F		SCALE	
F		SHEET SIZE	
F		SHEET 1	


TRI-SEALTM PRODUCT DATA SHEET


- This data sheet describes F-217® products
- This product is a three-ply co-extruded liner consisting of a foamed Low Density Polyethylene (LDPE) core sandwiched between two layers of solid Low Density Polyethylene

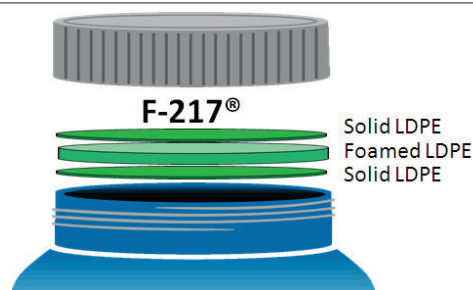
Typical Product Attributes
Construction

Structure	Solid LDPE / Foamed LDPE / Solid LDPE	Solid LDPE / Foamed LDPE / Solid LDPE
Color	White or as Specified	White or as Specified
Density		
for 20 ~ 30 mil (0,51 ~ 0,76 mm)	0,48 ± 0,03 g / cm ³	30 ± 2 lbs / ft ³
for 35 ~ 125 mil (0,89 ~ 3,18 mm)	0,40 ± 0,03 g / cm ³	25 ± 2 lbs / ft ³
Thickness Tolerance		
for 20 ~ 60 mil (0,51 ~ 1,52 mm)	± 0,127 mm	± 5 mil
for 65 ~ 90 mil (1,65 ~ 2,29 mm)	± 0,178 mm	± 7 mil
for 95 ~ 125 mil (2,41 ~ 3,18 mm)	± 0,254 mm	± 10 mil
Available Width		
for 20 ~ 60 mil (0,51 ~ 1,52 mm)	22,2 ~ 1016,0 mm	7/8 ~ 40 inch
for 65 ~ 125 mil (1,65 ~ 3,18 mm)	25,4 ~ 228,6 mm	1 ~ 9 inch
Width tolerance	± 1,6 mm	± 1/16 inch

Regulatory Compliance

FDA Compliance	21 CFR 177.1520 (Olefin Polymers) 21 CFR 177.1210 (Closures with Sealing Gaskets for Food Containers) 21 CFR 178.2010 (Antioxidants and/or Stabilizers for Polymers) 21 CFR 175.300 (Resinous and Polymeric Coatings)
Drug Master File (DMF)	2434
Other Compliances	USFDA Food Allergen Guidelines; California Proposition 65 Labeling Requirements; Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11

Original Date: 08/05/1997
 Revised Date: 01/31/2011
 Revision Number: 5
 Revised by SR

DISCLAIMER: This information is believed to be accurate at the time of printing and is subject to change without notice. Providing this information does not convey any licenses under any patent rights or other intellectual property rights of TRI-SEAL or others. **TRI-SEAL MAKES NO WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THIS INFORMATION AND DISCLAIMS ALL LIABILITY FROM RELIANCE ON IT.** TRI-SEAL's only warranties for this product are those written warranties as may be agreed to by TRI-SEAL and its customers. **TRI-SEAL SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.**

Tri-Seal
 900 Bradley Hill Road
 Blauvelt, NY 10913
 Tel: (845) 353-3300 – Fax: (845) 353-3376
<http://www.tri-seal.com>

Represented by



Product Specification Sheet

Illing Part#

36350B151




Freshness and Protection for Today's Packaging

Uni-Foam™ Technical Data Sheet

PS-113

Revision: PS-113-07262013

Product	PS-113		
Scope	One piece uniform PS foam coated on one side with a specially formulated torque-activated adhesive. (Not approved for use with wet products.)		
Composition	Material	Standard	Metric
	PS Foam	0.020"	0.508 mm
	Adhesive Layer	0.002"	0.051 mm
			
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to website	
Drug Master File (DMF): 3948		EU / EP Reg.:	
GTR Oxygen:		MVTR:	
Print Location (if any):			

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

www.seligsealing.com

Corporate Headquarters
Selig Sealing Products, Inc.
342 E Wabash St
Forrest, IL 61741, USA
Phone: +1 (815) 785-2100
Fax: +1 (815) 657-7584

North American Sales
Selig Sealing Products, Inc.
184 Shuman Blvd., Suite 310
Naperville, IL 60563, USA
Phone: +1 (630) 922-3158
Fax: +1 (630) 922-8469

European Sales and Manufacturing
Selig UK, LTD 635-637 Ajax Avenue
Slough Trading Estate
Slough Berkshire SL14BH UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canadian Manufacturing
Selig Canada, ULC
145 Edward Street
Aurora, Ontario Canada, L4G 1W3
Phone: +1 (905) 727-0014
Fax: +1 (905) 727-8544

Swiss Manufacturing
Selig Switzerland LTD
Bahnhofstrasse 11
CH-8172 Niederglatt
Phone: +41 (0) 44 851 50 50
Fax: +41 (0) 44 851 50 51

