

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3645CRC

45-CRC WHT PP CAP W/ .035 SURESEAL 222

Part #: 3645CRC

Size:	45-CRC
Color:	WHITE
Material:	PP
Style:	PLASTIC RIBBED CAP
Additional Info:	.035 SURESEAL 222 LINER
Case Pack:	1,700/EACH
Pallet Pack:	25,500/EACH



Shrink Labeling



www.illingpackaging.com

CHILD-RESISTANT CLOSURES

45-CRC-STPT S



Specifications:

DIAMETER 45 mm

THREAD PROFILE CRC

NECK FINISH 45-CRC

CLOSURE TOP Embossed

CLOSURE SIDEWALL Wide Ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Bulk	1,700	15	25,500	36 ⁽¹⁾	537 ⁽¹⁾	100 ⁽¹⁾
Bulk	1,700	15	25,500	36 ⁽²⁾	537 ⁽²⁾	100 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15			PALLET DIMENSIONS: 48 x 40 x 50			

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Vitamins, Nutraceuticals, Pharmaceuticals, Supplements, Agricultural Products, Automotive Products, Household Chemicals, Cosmetics, Industrial Products, Cannabis, and Nutritional Powders.

OPTIONS

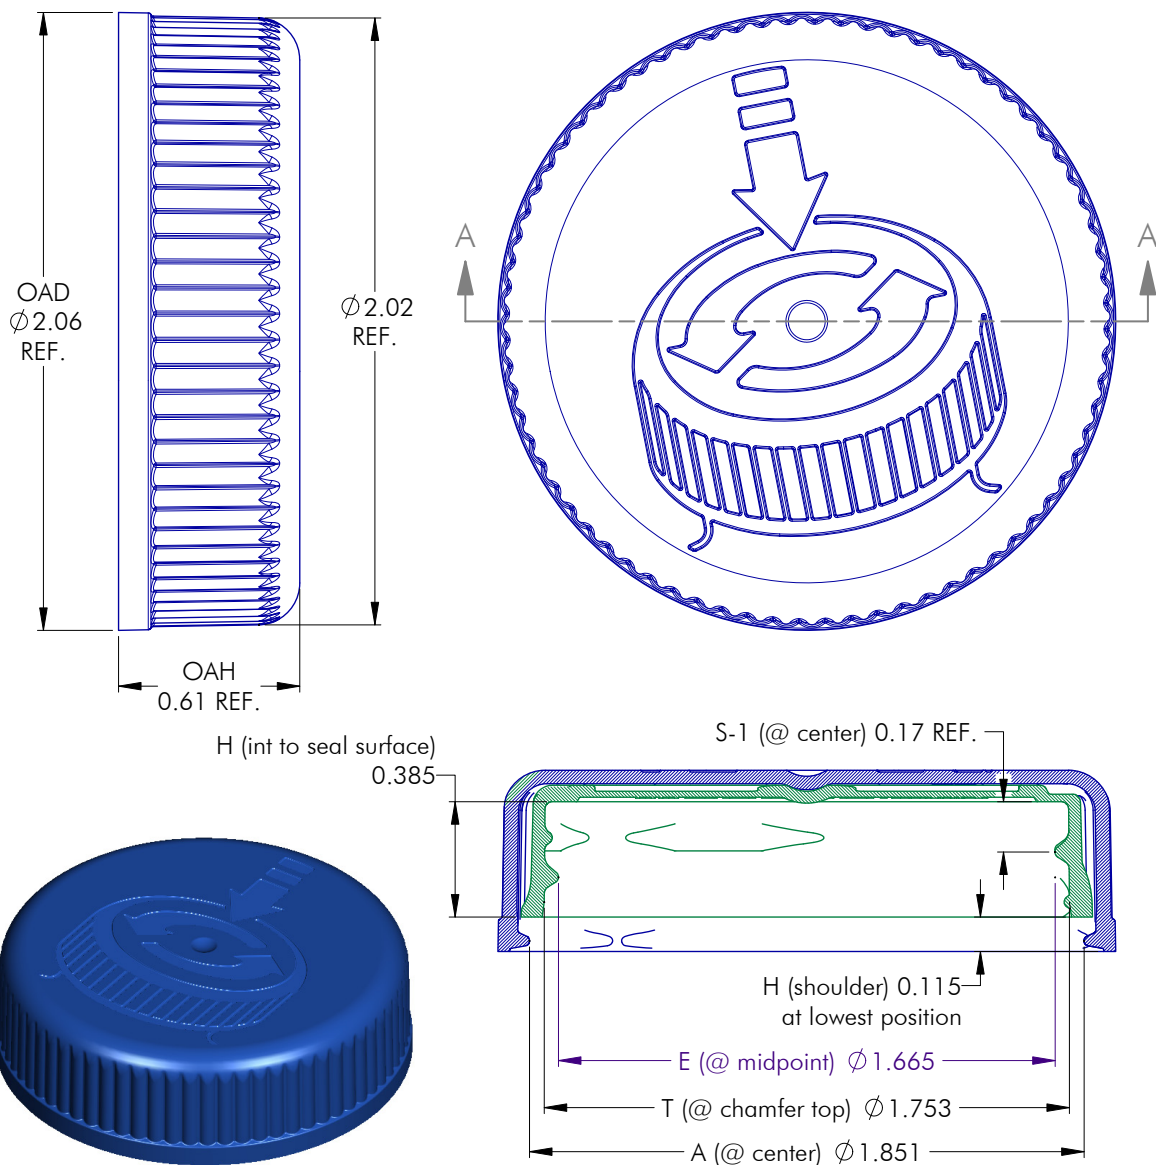
Available in white, standard, and custom colors. Can be lined with a wide variety of liner systems including SureSeal (foam), pressure sensitive

CLOSURE BENEFITS

- Offers child-resistance feature
- Vista™ CRC
- Push-and-turn
- Popular for vitamins & nutraceuticals
- Embossed with pictogram

CHILD-RESISTANT CLOSURES

45-CRC-STPT S



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE IN INCHES.

2. SEE CHART FOR DIMENSIONAL TOLERANCE.

THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.

5	07.03.18	Update 'E' Dim. to Reflect Production	DN
REV	DATE	DESCRIPTION	BY
TOLERANCE	PITCH/TPI .167 / 6	TURNS 345°	MAT'L PP
.X ± 0.1	DRAWN DMN	DATE 08.28.16	SCALE 2 : 1
.XX ± 0.02			REV
.XXX ± 0.010			5

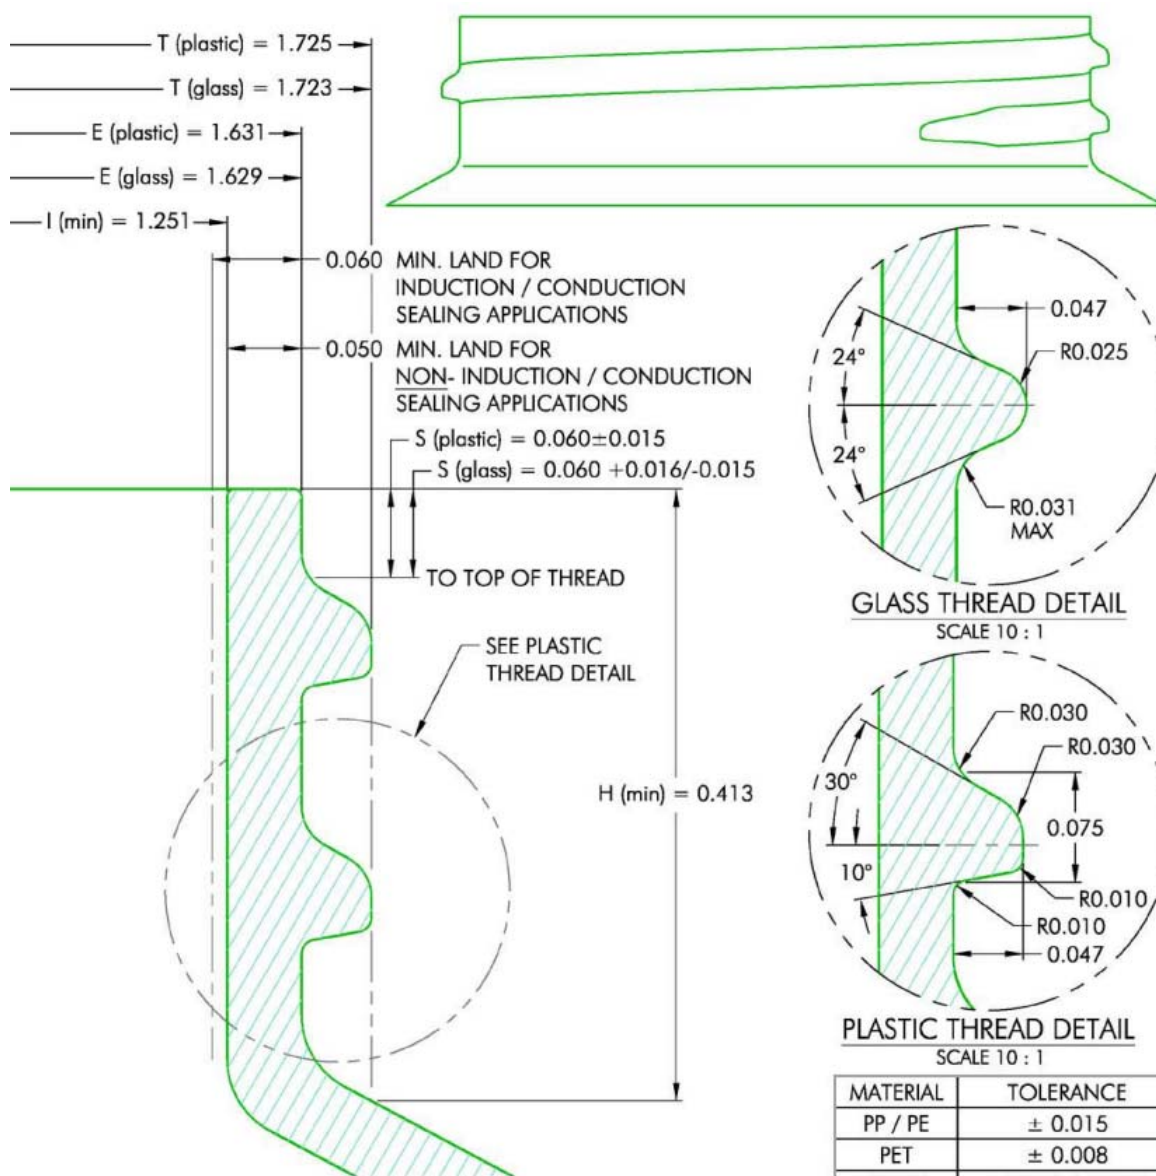

PHOENIX

PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
 1899 High Grove Lane Naperville, IL 60540

CHILD-RESISTANT CLOSURES

45-CRC-STPT S



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE IN INCHES.
2. SEE CHART FOR DIMENSIONAL TOLERANCE.

THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.

0	09.17.96	Released	BZ
REV	DATE	DESCRIPTION	BY
TOLERANCE	PITCH/TPI .167 / 6	TURNS 1-1/8	MAT'L Per Chart
.X ±0.1	DRAWN BEZ	DATE 09.17.96	SCALE 10 : 1
.XX ±0.02			REV
.XXX ±0.010			
45 - 400 - FINISH			0


PHOENIX™

PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
 1899 High Grove Lane Naperville, IL 60540

Product Name:	SureSeal® 200 Series
Product Type:	One piece, three-ply coextruded liner.
Material:	Low density polyethylene skin top and bottom with foamed polyolefin core.
Composition:	Core and outer skin fusion. Closed cell foam core of LDPE is sandwiched between polyethylene skin. This results in a chemically fused, single polymeric product.
Composition Benefits:	Symmetrical construction - either side serves as the liner face. Single polymeric product - no ply-separation.
Application:	Applications have provided positive sealing for foods, beverages, pharmaceuticals, cosmetics, industrial and household chemicals.
Compatibility:	SureSeal® 200 Series is chemically inert, odorless, tasteless and dust-free. Good resistance to acids, alkalis, slow solvents, alcohols, oils and aqueous products. Poor resistance to active hydrocarbon solvents.
Performance Values:	Excellent sealability, resiliency and compression recovery. Excellent torque retention.
Thickness/Width:	Available in thicknesses of .020" to .060" (+/- .005") Widths from 1" to 36" (+/- .031")
Density:	SureSeal® 222 = 24 < 28 lbs/ft ³ SureSeal® 226 = 26 < 30 lbs/ft ³
Color:	FDA approved white. Custom colors available upon request.
FDA Status:	Drug Master File #12831. This material complies with FDA regulation 177.1520(c)3.1 for food contact application.