

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3652PSF


38-400 WHITE PPC CAP MATTED/RIB SIDES PS-22 SURESEAL

Part #: 3652PSF

Size:	38-400 NECK
Color:	WHITE
Material:	PP
Style:	PLASTIC SCREW CAP
Additional Info:	F-217 FOAM LINER, 6TPI
Case Pack:	3,125 / EACH
Pallet Pack:	



www.illingpackaging.com

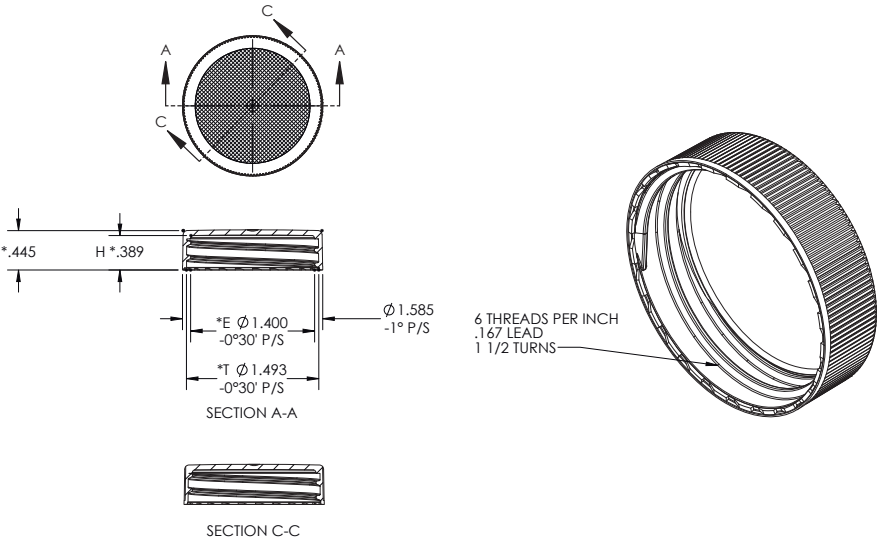

* INDICATES THEORETICAL SHARP CORNER

	TOLERANCES (EXCEPT AS NOTED)		RELIABLE CAPS, LLC	
	DECIMAL ± .X = .030 ± .XX = .010 ± .XXX = .003	SCALE 1:1	DRAWN BY M. BERUBE APPROVED BY	
	FRACTIONAL ± 1/64	TITLE UNSCREWING MOLD 38-400 CAP - LIGHT		
	ANGULAR ± 0°15'	DATE 6-4-2024	DRAWING NUMBER S-6569 SHEET 1 OF 1	

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#


3652PSF



900 Bradley Hill Road, Blauvelt, New York 10913 (845) 353-3300 FAX: (845) 353-3376

TECHNICAL DATA SHEET

F- 217

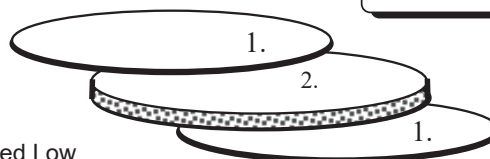

Description: Three -ply co-extruded material; Foamed Low Density Polyethylene Core (2.) Between Two Solid Layers Of Low Density Polyethylene (1.).

SPECIFICATIONS

Thickness			Available Web Width		
Minimum In (mm)	Maximum In (mm)	Deviation In (mm)	Minimum In (mm)	Maximum In (mm)	Deviation In (mm)
0.020 (0.51)	0.060 (1.52)	+/-0.005 (0.127)	1.0 (25.4)	25.0 (635.0)	+/-1/16 (1.6)
0.065 (1.65)	0.090 (2.29)	+/-0.007 (0.178)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)
0.095 (2.41)	0.125 (3.18)	+/-0.010 (0.254)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)

Density	Deviation
25 lbs/ft ³	+/-2 lbs/ft ³

Code of Federal Regulations Compliance: Complies to the following CFR's

21CFR177.1520	Olefin polymers.
21CFR177.1210	Closures with sealing gaskets for food containers.
21CFR178.2010	Antioxidants and or stabilizers for polymers.
21CFR175.300	Resinous and polymeric coatings.

Original Date: 08/05/97
Revision Date: 06/13/01
Revision Number: 1

FDA Status: The component materials of F-217 are listed under DMF 2434.

The aforementioned technical information and any recommendation are based on Tri-Seal's Laboratory Findings and are believed to be true and accurate, but we strongly recommend that our customers perform appropriate tests they feel necessary to ensure the compatibility and stability of any given product with ours. Tri-Seal, a Tekni-Plex Co. guarantees to replace any quantity proved to be defective. We will not be held liable for any injury, loss or change, whether direct, incidental or consequential, due to the use of or inability to use the product due to a breach of warranty of any agreement between Tri-Seal and the purchaser. Unless contained in this data sheet or agreed to in writing by the officers of the seller and user no other warranty will be honored.

Represented by



Product Specification Sheet


Illing Part# 3652PSF



Freshness and Protection for Today's Packaging

Uni-Foam™ Technical Data Sheet PS-113 (Pressure Sensitive)

Revision: PS-113-12022013

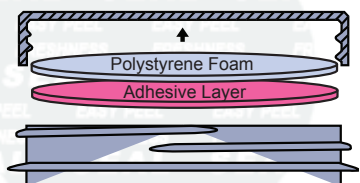Product	PS-113 (Pressure Sensitive)		
Scope	One piece uniform polystyrene foam coated on one side with a specially formulated torque-activated adhesive. (Not approved for use with wet products.)		
Composition	Material	Standard	Metric
	Polystyrene Foam	0.020"	0.508 mm
	Adhesive Layer	0.002"	0.051 mm
			
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to website	
Drug Master File (DMF): 3948		EU / EP Reg.:	
GTR Oxygen: 2290 cc/m².Day (ASTM D3985)			MVTR: 5.85 g/m².Day (ASTM F1249)
Print Location (if any):			

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

www.seligsealing.com

Corporate Headquarters
Selig Sealing Products, Inc.
342 E Wabash St
Forrest, IL 61741, USA
Phone: +1 (815) 785-2100
Fax: +1 (815) 657-7584

North American Sales
Selig Sealing Products, Inc.
184 Shuman Blvd., Suite 310
Naperville, IL 60563, USA
Phone: +1 (630) 922-3158
Fax: +1 (630) 922-8469

European Sales and Manufacturing
Selig UK, LTD 635-637 Ajax Avenue
Slough Trading Estate
Slough Berkshire SL14BH UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canadian Manufacturing
Selig Canada, ULC
145 Edward Street
Aurora, Ontario Canada, L4G 1W3
Phone: +1 (905) 727-0114
Fax: +1 (905) 727-8544

Swiss Manufacturing
Selig Switzerland LTD
Bahnhofstrasse 11
CH-8172 Niederglatt
Phone: +41 (0) 44 851 50 50
Fax: +41 (0) 44 851 50 51

