

38-400 WHITE PP CT CAP WITH FOIL SEAL AND HEAT SEAL FOR PE

Part #: 3655

Size:	38-400
Color:	White
Material:	PP
Style:	Plastic Fine Ribbed Cap
Additional Info:	Stipple Top
Case Pack:	3,500 each
Pallet Pack:	52,500 each


SHALLOW SKIRTED CLOSURES

38-400-6201 U



Specifications:

DIAMETER 38 mm

THREAD PROFILE 400

NECK FINISH 38-400

CLOSURE TOP Stipple

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Bulk	3,500	15	52,500	35 ⁽¹⁾	530 ⁽¹⁾	92.5 ⁽¹⁾
Bulk	3,500	15	52,500	39 ⁽²⁾	586 ⁽²⁾	92.5 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

CLOSURE BENEFITS

- A great general-purpose closure
- A proven closure for the Food Oil and Agricultural Chemical markets
- Fine-ribbed sides are easier to grip
- Our most popular closure style
- Popular for cosmetics

MARKETS

Agricultural, Automotive, Industrial, and Medical Products, Dressings & Sauces, Food, Food Oil & Service, Personal Care & Cosmetics, Pharmaceuticals, Beverages, Household Chemicals, Nutraceuticals, and Dairy Products.

OPTIONS

Available in white, standard, and custom colors. Can be embossed or debossed with your custom message.


PHOENIX


PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
 1899 High Grove Lane Naperville, IL 60540



SHALLOW SKIRTED CLOSURES

38-400-6201 U

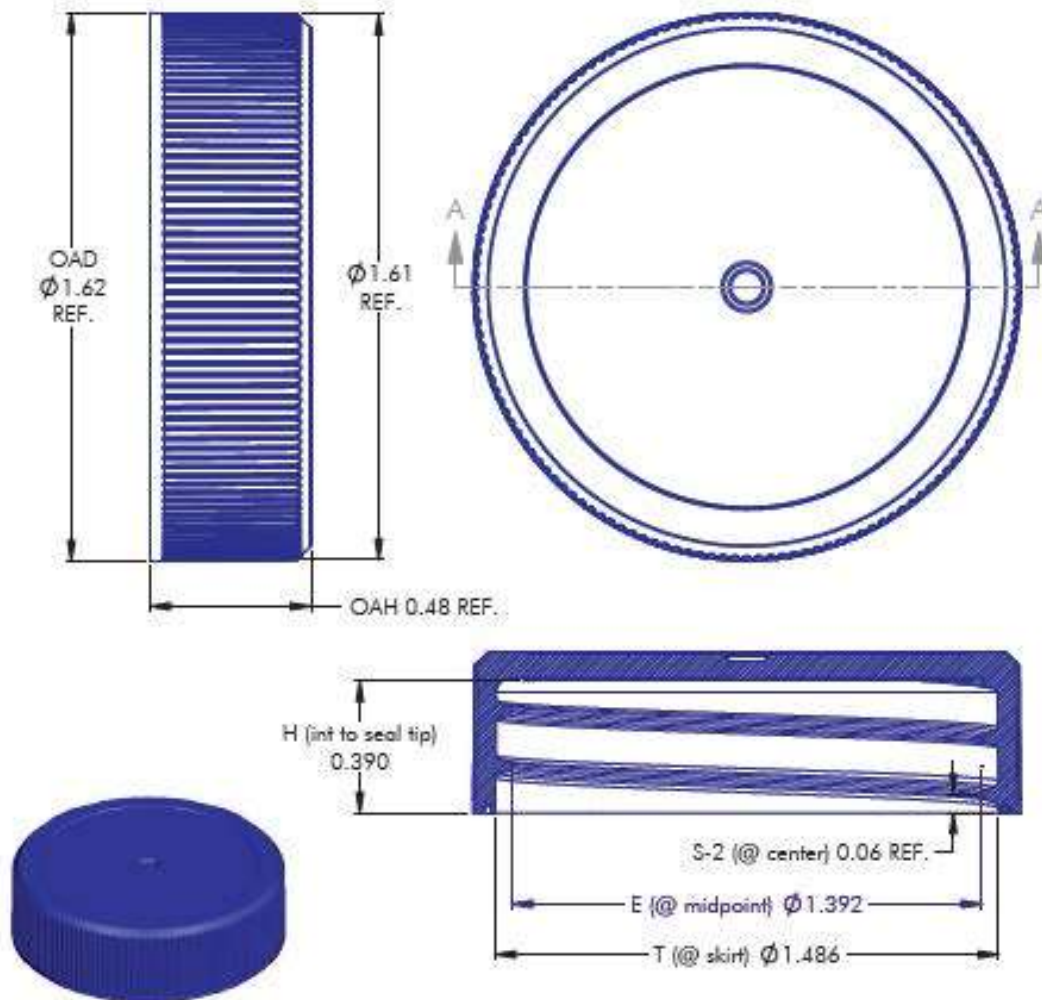

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE IN INCHES.

2. SEE CHART FOR DIMENSIONAL TOLERANCE


THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.

REV	DATE	DESCRIPTION	BY
3	04.20.15	Redefine Reference Dimensions	DN
TOLERANCE	PITCH/TPL	.167 / 6	TURNS ~1-1/2
X	±0.1	DRAWN DMN	DATE 07.18.02
XX	±0.02	SCALE	5 : 2
XXX	±0.010	38 - 400 - 6201 U	3



SHALLOW SKIRTED CLOSURES

38-400-6201 U

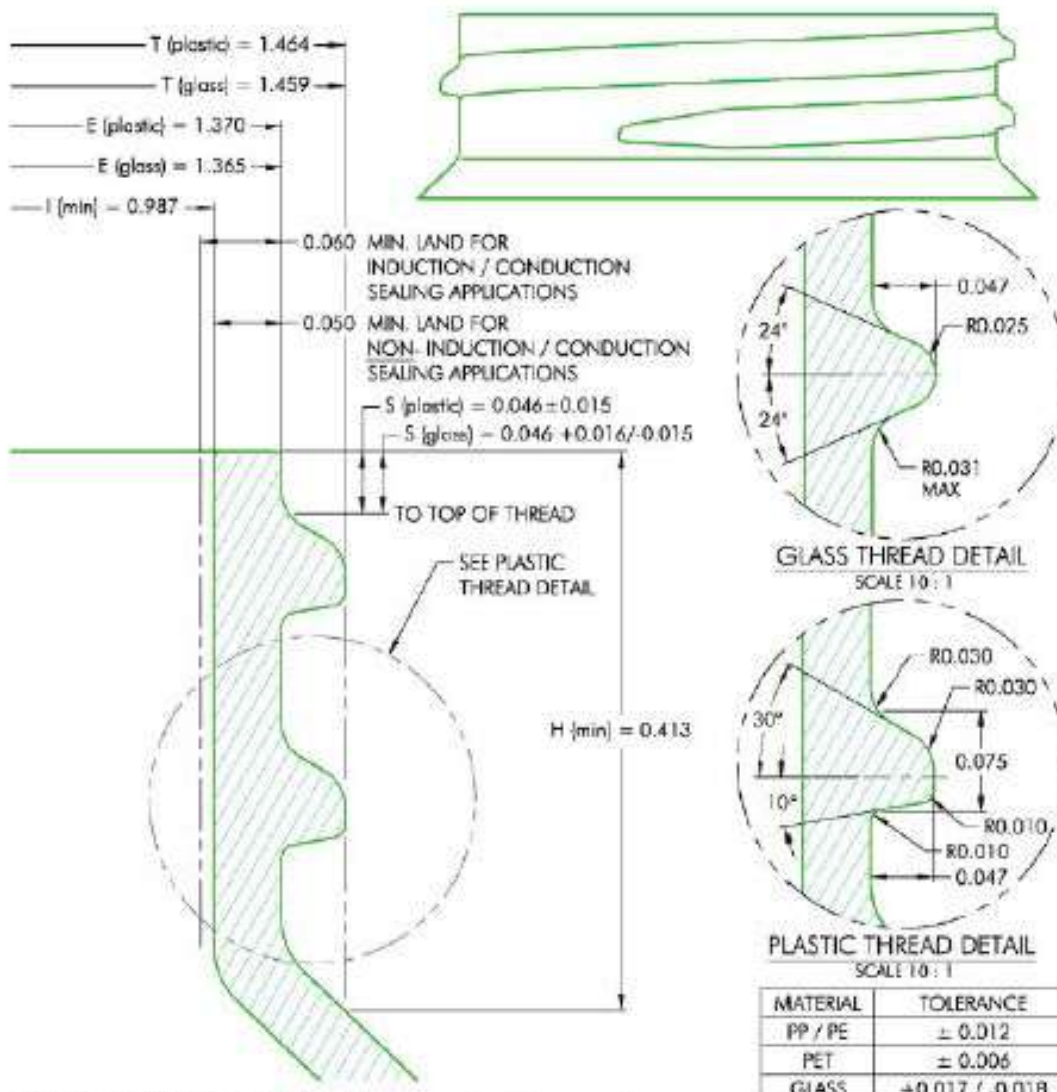

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES.
2. SEE CHART FOR DIMENSIONAL TOLERANCE.

THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DERIVED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.

BF	05.21.18	Released	DN
REV	DATE	DESCRIPTION	BY
TOLERANCE	PITCH/TPI .167 / 6	TURNS 1-1/4	MATL Per Chart
X ±0.1	DRAWN BEZ	DATE 08.31.93	SCALE 10:1
XX ±0.02			REV
XXX ±0.010			
		38 - 400 - FINISH	0



PHOENIX™

PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
1899 High Grove Lane Naperville, IL 60540



FoilSeal™ Technical Data Sheet

.020" Pulp FS 1-19

Revision: FS119-09112014

Product	.020" Pulp FS 1-19		
Scope	Two piece pulp backed heat induction foil innerseal which will provide a tamper-evident bond to PE containers with added barrier layer for sealing aggressive products.		
Composition	Material	Standard	Metric
	Backing	.020"	.508 mm
	Wax	-	-
	Foil	.001"	.0254mm
	Barrier	.001"	.0254mm
	Heat Seal	.0015"	.0381mm
			Adhesive or resin bonding layers not shown.
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to Website	
Drug Master File (DMF): #4544		EU / EP Reg.:	
GTR Oxygen: Essentially Zero		MVTR: Essentially Zero	
Print Location (if any): Foil Layer and/or Heat Seal Layer			

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

www.seligsealing.com