

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3655BLNPR

38-400 BLACK PP SURESEAL CAP LIFT-N-PEEL U5 P-E LINER



Part #: 3655BLNPR

Size:	38-400
Color:	BLACK
Material:	PP
Style:	SMOOTH CAP
Additional Info:	FINE RIBBED
Case Pack:	3,750 EACH
Pallet Pack:	56,250 EACH



www.illingpackaging.com

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#

3655BLNPR

SMOOTH TOP & RIBBED SIDES

38-400-73 S



Specifications:

DIAMETER 38 mm

THREAD PROFILE 400

NECK FINISH 38-400

CLOSURE TOP Smooth

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Bulk	3,750	15	56,250	23 ⁽¹⁾	338 ⁽¹⁾	125 ⁽¹⁾
Bulk	3,750	15	56,250	25 ⁽²⁾	380 ⁽²⁾	125 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Food, Personal Care & Cosmetics,
Pharmaceuticals, Nutraceuticals, Dairy
Products, and Medical Products.

OPTIONS

Available in white, standard, and custom colors.
Can be lined with a wide variety of liner systems.
Liners can be cut with tri-tab easy-open feature.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Popular for vitamins and nutraceuticals
- Stocked in white (colors available)



PHOENIXTM


PHXPKG.COM

P 630 420 4750 E greatpkg@phxpkg.com
1899 High Grove Lane Naperville, IL 60540



SMOOTH TOP & RIBBED SIDES


38-400-73 S

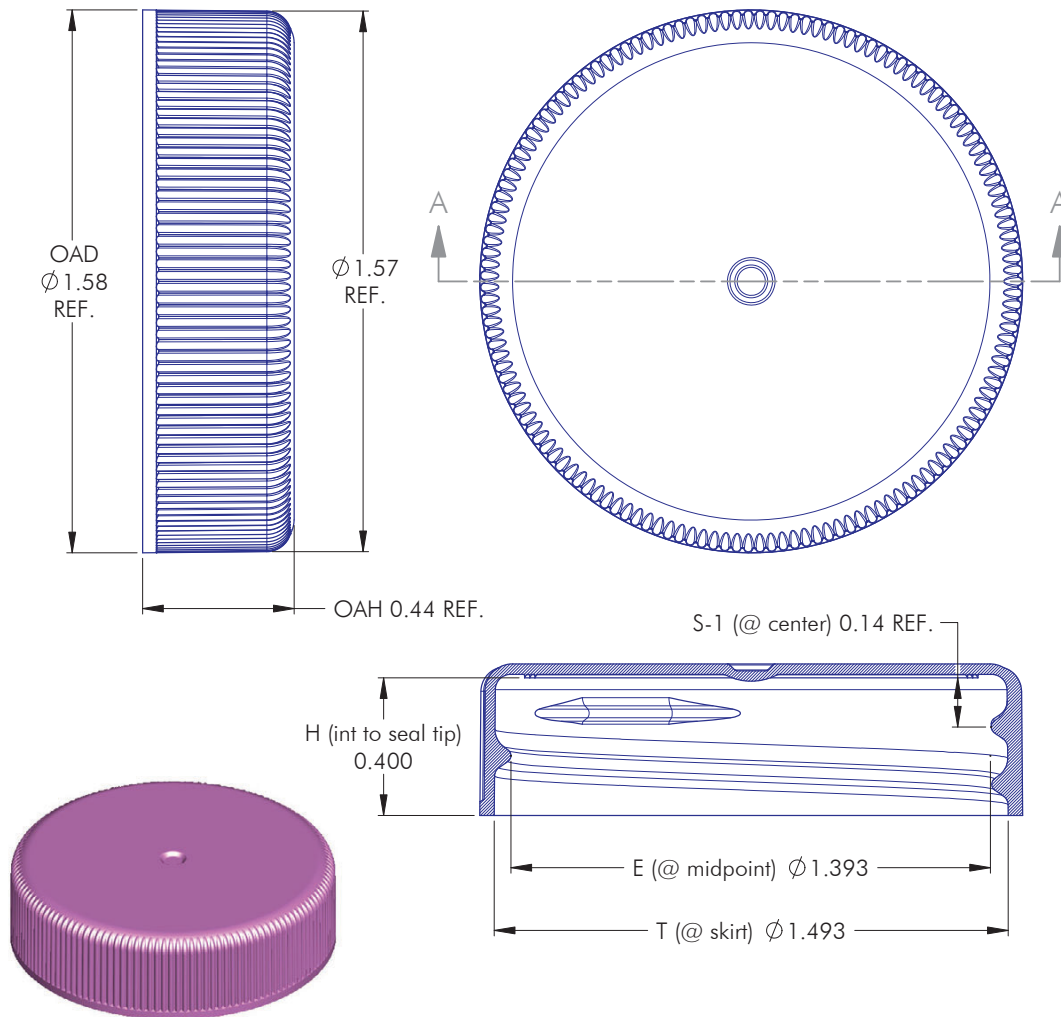

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				0	02.20.08	Released	DN
REV		DATE		DESCRIPTION			BY
TOLERANCE		PITCH/TPI		.167 / 6		TURNS 1-3/16	
.X		±0.1		DRAWN DMN		DATE 02.20.08	
.XX		±0.02		SCALE		5 : 2	
.XXX		±0.010		38 - 400 - 73 S		0	




38-400-73 S

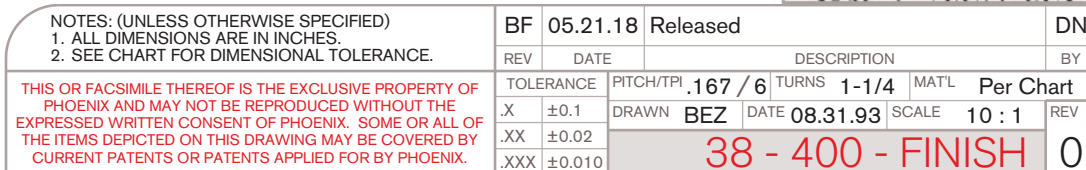

Lift 'n' Peel™ Technical Data Sheet

Lift 'n' Peel™ U5 LP-E/D2

Revisions: U5 LP-E/D2-07252013

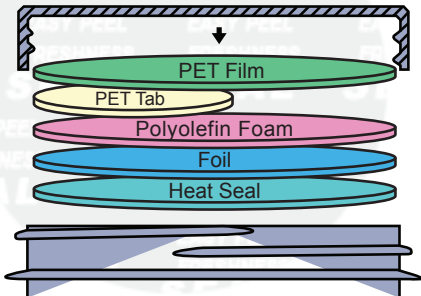Product	Lift 'n' Peel™ U5 LP-E/D2																				
Scope	One piece top-tabbed induction seal with foam backing that features an easily opened clean peel design for use on PE and PP.																				
Composition	<table><thead><tr><th>Material</th><th>Standard</th><th>Metric</th></tr></thead><tbody><tr><td>PET Film</td><td>0.001”</td><td>0.025mm</td></tr><tr><td>PET Tab</td><td>0.0005”</td><td>0.013mm</td></tr><tr><td>Polyolefin Foam</td><td>0.0045”</td><td>0.114mm</td></tr><tr><td>Foil</td><td>0.001”</td><td>0.025mm</td></tr><tr><td>Heat Seal</td><td>0.0025”</td><td>0.064mm</td></tr></tbody></table>	Material	Standard	Metric	PET Film	0.001”	0.025mm	PET Tab	0.0005”	0.013mm	Polyolefin Foam	0.0045”	0.114mm	Foil	0.001”	0.025mm	Heat Seal	0.0025”	0.064mm		
	Material	Standard	Metric																		
PET Film	0.001”	0.025mm																			
PET Tab	0.0005”	0.013mm																			
Polyolefin Foam	0.0045”	0.114mm																			
Foil	0.001”	0.025mm																			
Heat Seal	0.0025”	0.064mm																			
	Composition does not include adhesive or resin bonding layers (if any).																				
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to website																			
Drug Master File (DMF): 11485		EU / EP Reg.:																			
GTR Oxygen: Essentially zero		MVTR: Essentially zero	Manufacturing Location: North America																		
Print Location (if any): PET Tab																					

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

www.seligsealing.com

USA Manufacturing
342 E Wabash Ave.
Forrest, IL 61741, USA
Phone: +1 (815) 785-2100
Fax: +1 (815) 657-7584

North American Sales
184 Shuman Blvd.,
Suite 310
Naperville, IL 60563, USA
Phone: +1 (630) 922-3158
Fax: +1 (630) 922-8469

European Sales and UK Manufacturing
635-637 Ajax Avenue
Slough Trading Estate
Slough Berkshire SL1 4BH UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canada Manufacturing
145 Edward Street
Aurora, Ontario Canada, L4G 1W3
Phone: +1 (905) 727-0114
Fax: +1 (905) 727-8544

Switzerland Manufacturing
Bahnhofstrasse 13
8172 Niederglatt
Phone: +41 (0) 44 851 50 50
Fax: +41 (0) 44 851 50 51

Product Name:	SureSeal® 600 Series
Product Type:	One piece, three-ply coextruded liner.
Material:	Polypropylene skin top and bottom with foamed polyolefin core.
Composition:	Core and outer skin fusion. Closed cell foam core of LDPE/EVA is sandwiched within polypropylene. This results in a chemically fused, single polymeric product.
Composition Benefits:	Symmetrical construction - either side serves as the liner face. Single polymeric product - no ply-separation.
Application:	Recommended as a secondary liner for heat induction innerseals.
Compatibility:	SureSeal® 600 Series is chemically inert, odorless, tasteless and dust-free. Good resistance to acids, alkalies, slow solvents, alcohols, oils and aqueous products. Poor resistance to active hydrocarbon solvents.
Performance Values:	Excellent sealability, resiliency and compression recovery. Excellent torque retention.
Thickness/Width:	Available in thicknesses of .030", .035", and .040" (+/- .005") Widths from 1" to 36" (+/- .03125")
Density:	SureSeal 626® = 26 < 30 lbs/ft³ SureSeal 632® = 32 < 36 lbs/ft³
Color:	FDA approved white. Custom colors available upon request.
FDA Status:	Drug Master File #12831. This material complies with FDA regulation 177.1520(c)3.1 for food contact application.