
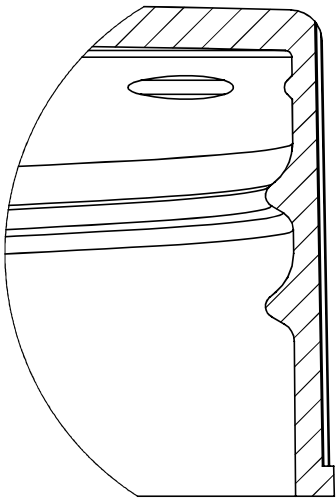



28-410 WHITE PLASTIC CAP WITH FOAM LINER

Part #: 3660SA


Size:	28-410
Color:	White
Material:	Polypropylene
Style:	Plastic Fine Ribbed Cap
Additional Info:	Stipple Top
Case Pack:	2,900 each
Pallet Pack:	101,500 each

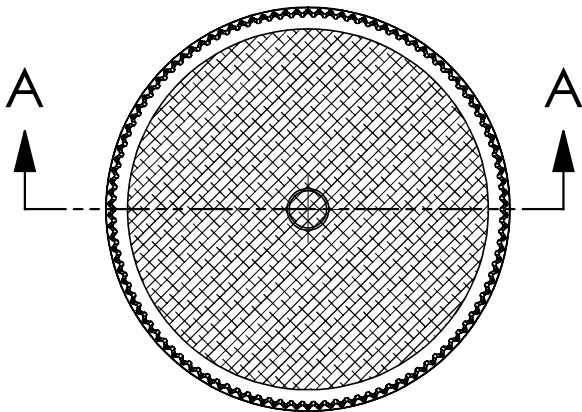

DETAIL B
SCALE 4 : 1

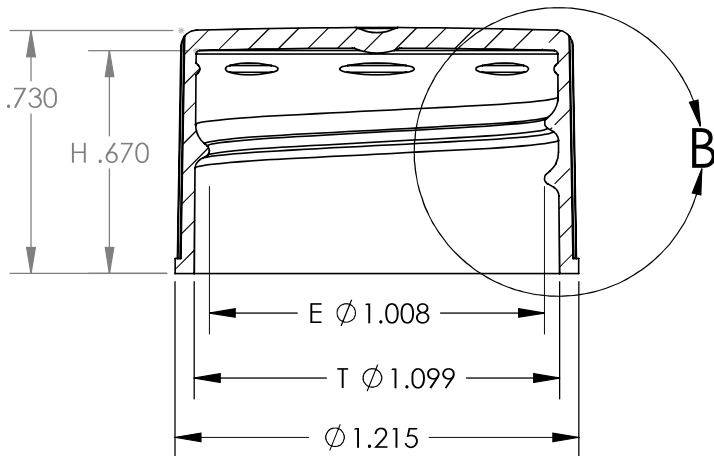

6 THREADS PER INCH
.167 LEAD 1 1/4 TURNS

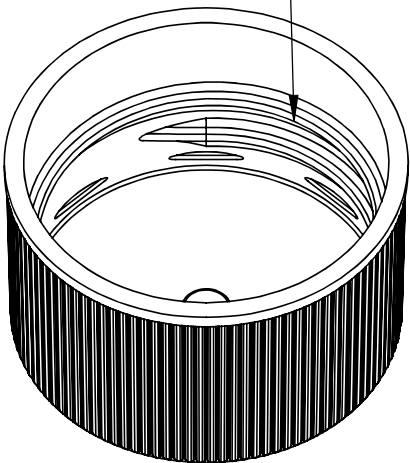

UNLESS OTHERWISE SPECIFIED:

						RELIABLE CAPS, LLC	
						28-410 STRIP MOLD CAP	
						SIZE DWG. NO. 28-410 REV. A	
						SCALE:2:1 WEIGHT: SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
RELIABLE CAPS, LLC IS PROHIBITED.

Represented by



ILLINGTM
P A C K A G I N G

Product Specification Sheet

Illing Part#


3660SA



900 Bradley Hill Road, Blauvelt, New York 10913 (845) 353-3300 FAX: (845) 353-3376

TECHNICAL DATA SHEET

F- 217

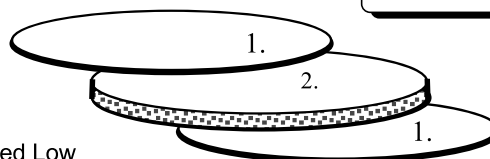

Description: Three -ply co-extruded material; Foamed Low Density Polyethylene Core (2.) Between Two Solid Layers Of Low Density Polyethylene (1.).

SPECIFICATIONS

Thickness			Available Web Width		
Minimum In (mm)	Maximum In (mm)	Deviation In (mm)	Minimum In (mm)	Maximum In (mm)	Deviation In (mm)
0.020 (0.51)	0.060 (1.52)	+/-0.005 (0.127)	1.0 (25.4)	25.0 (635.0)	+/-1/16 (1.6)
0.065 (1.65)	0.090 (2.29)	+/-0.007 (0.178)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)
0.095 (2.41)	0.125 (3.18)	+/-0.010 (0.254)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)

Density	Deviation
25 lbs/ft ³	+/-2 lbs/ft ³

Code of Federal Regulations Compliance: Complies to the following CFR's

21CFR177.1520	Olefin polymers.
21CFR177.1210	Closures with sealing gaskets for food containers.
21CFR178.2010	Antioxidants and or stabilizers for polymers.
21CFR175.300	Resinous and polymeric coatings.

Original Date: 08/05/97
Revision Date: 06/13/01
Revision Number: 1

FDA Status: The component materials of F-217 are listed under DMF 2434.

The aforementioned technical information and any recommendation are based on Tri-Seal's Laboratory Findings and are believed to be true and accurate, but we strongly recommend that our customers perform appropriate tests they feel necessary to ensure the compatibility and stability of any given product with ours. Tri-Seal, a Tekni-Plex Co. guarantees to replace any quantity proved to be defective. We will not be held liable for any injury, loss or change, whether direct, incidental or consequential, due to the use of or inability to use the product due to a breach of warranty of any agreement between Tri-Seal and the purchaser. Unless contained in this data sheet or agreed to in writing by the officers of the seller and user no other warranty will be honored.