

Represented by



ILLING[™]
P A C K A G I N G

Product Specification Sheet

Illing Part#

3714TS

TS-800-1 SPRAYER 28-400 WHITE WITH RIGID DIP TUBE 9 29/32"

Part #: 3714TS

Size:	28-400 NECK
Color:	WHITE
Material:	PP; PE; SS
Style:	TRIGGER SRAYER
Additional Info:	WITH RIGID DIP TUE 9 29/32"
Case Pack:	320 / EACH
Pallet Pack:	6,400 / EACH


ENVISION
DESIGN DECORATE DELIVER

LabelILLING[™]


AI SMART
PACKAGING

ILLING
GLOBAL
S O U R C I N G

www.illingcompany.com

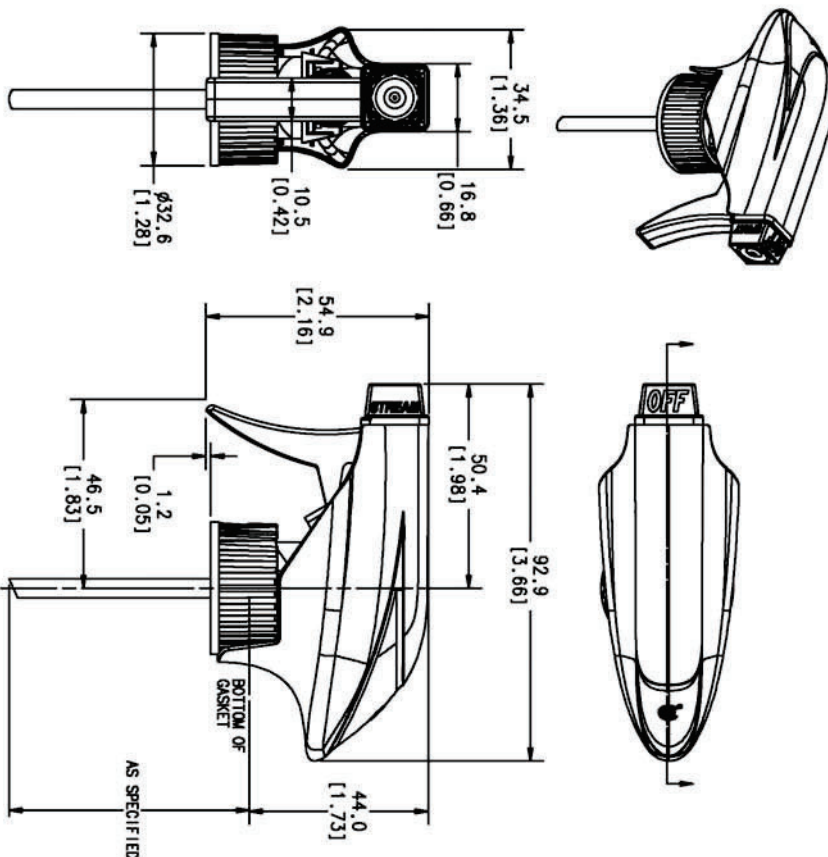

NOTES:
1. DIMENSION FORMAT: MILLIMETERS [INCHES]
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
FROM CAD DATA AND DO NOT INCLUDE
MANUFACTURING TOLERANCES.

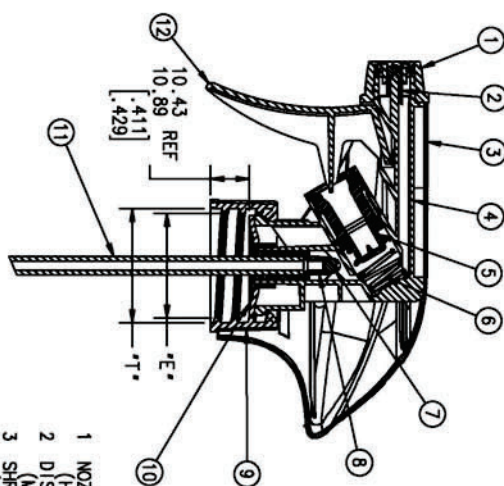

- 1 NOZZLE -1
(HIGH DENSITY POLYETHYLENE)
- 2 DISCHARGE VALVE
(MED. DENSITY POLYETHYLENE)
- 3 SHROUD - ARC
(POLYPROPYLENE)
- 4 VALVE BODY
(POLYPROPYLENE)
- 5 PISTON
(MED. DENSITY POLYETHYLENE)
- 6 SPRING
(STAINLESS STEEL)
- 7 BALL VALVE
(STAINLESS STEEL)
- 8 TUBE RETAINER
(POLYPROPYLENE)
- 9 CLOSURE 28-400
(POLYPROPYLENE)
- 10 GASKET
(POLYETHYLENE FOAM)
- 11 DIP TUBE
(POLYPROPYLENE)
- 12 TRIGGER - STANDARD
(POLYPROPYLENE)

BECAUSE THE CLOSURE HAS A 1/2" DRAFT:

THE MAX. "E" DIA. OF 28.1913.1101 IS TAKEN AT THE BOTTOM OF THE CLOSURE	THE MAX. "E" DIA. OF 25.8113.0161 IS TAKEN AT THE FIRST FULL THREAD
THE MIN. "F" DIA. OF 27.6613.0891 IS TAKEN AT 16.661.6561 FROM THE BOTTOM OF THE CLOSURE	THE MIN. "E" DIA. OF 25.2710.9951 IS TAKEN AT 16.861.6561 FROM THE BOTTOM OF THE CLOSURE

"UNCONTROLLED"

NOMINAL OUTPUT: 0.9cc



TS800 TRIGGER SPRAYER

COFF/ELABORATION: 20-400, A/C SINGO, S/S SINGO,	DESIGN: BWH	CRASHING NO. 98000
---	-------------	--------------------

SS BALL, STANDARD TRIGGER, NOZZLE -1	02/28/17	6665DU4100
--------------------------------------	----------	------------