






# Airco Line Set Bender



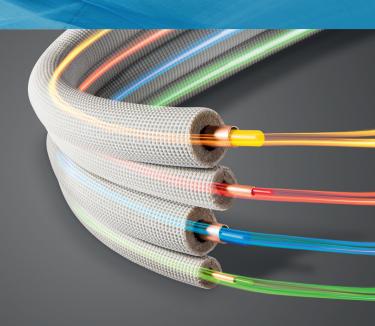

12 mm 9 mm 6 mm 4 mm

## Features and benefits

- Hassle free no need for springs
- Easy retraction
- Very flexible
- Durable
- No need for heavy or expensive equipment
- Bend 2 copper tubes in 1 time
- Preserves the insulation of the tubes
- Reusable with resealable straps

# Standard colors

Red, green, yellow and blue

### Material

PolyEthylene (PE)

# Packaging

Bags of 4x4 ml (one of each color/dimension)

## Cleaning

Reusable if kept clean.

#### Storage temperature

Between -50°C/-58°F and +80°C/+176°F


# Operation/Application temperature

Between -10°C/14°F and +45°C/+113°F

Model	EZB				
Ref.	0508.00010.000				
Colour	Red	Green	Yellow	Blue	
Diameter	4mm / 1/4"	6mm / 3/8"	9mm / 1/2"	12mm / 5/8"	
Length	4 m	4 m	4 m	4 m	
Packaging / MOQ		1 set contains the 4 different colours / 10 sets/box			
PAL		180 sets			







Step 1: Insert the flexible bender of the right diameter into the copper tube



Step 2: Bend to required angle.



Step 3: Retract the flexible bender.



Step 4: Reusable if kept clean. The benders are ready for the next installation.



No more kinks or leaks when bending your linesets



Scan QR-code & watch the easy-to-use video

# Disclaimer

Castel Engineering, Rue de la Royenne 84, B-7700 Mouscron, Tel +32 (0) 56 33 68 40 - Fax. +32 (0) 56 33 78 10 Copyright © 2015 Castel Engineering - All rights reserved.

Those who in any way utilize the product(s) are solely responsible for determining (a) the suitability of the product for the intended use, (b) the appropriate manner of processing and maintaining the product to ensure safety and quality and (c) chemical, physical and health effects related to those activities, (d) to inform themselves in order to be able to decide if specific tests are necessary for their intended use in respect to norms and regulations in application at the location of their intended use. The qualified installer is supposed to have professional knowledge Appropriate tools and materials for installation and for maintenance must be selected and used according to the professional know-how, in respect with the nature of our products and in compliance with all procedures and regulations in application at the location of installation. All above parameters, factors, operations, regulations, compliances and procedures are totally beyond Castel Engineering sa and its Affiliates acts in a simple sale – purchase transaction. Castel Engineering and its Affiliates disclaim any and all responsibility and liability for the use of any such data, information and/or the relevant product. All dimensions in this document are in mm unless otherwise specified.