


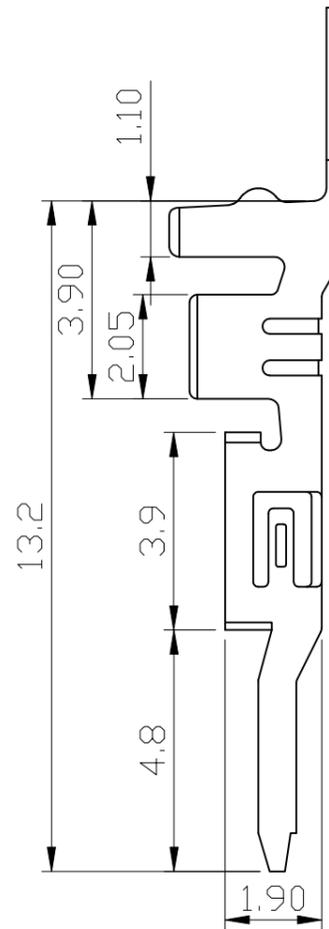


PRODUCT NUMBER


10132448-1X1XLF

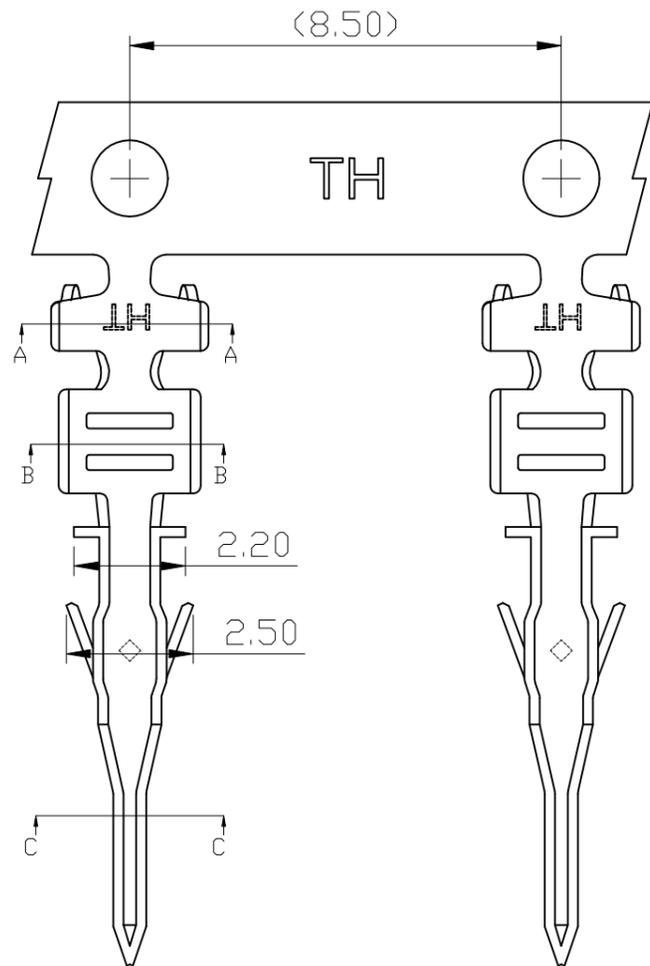

Section A-A



Section B-B



Section C-C

NOTES:

- MATERIAL:
TERMINAL: HIGH CONDUCTIVITY COPPER ALLOY.
- PLATING:
CONTACT AREA : OPTIONAL
CRIMP AREA : OPTIONAL
UNDER PLATING : MIN. 15u" NICKEL OVERALL
- APPLICABLE WIRES: AWG#16~#20, INSULATOR O.D:
2.2mm MAX.
- REFER GS-20-0399 APPLICATION SPECIFICATION FOR MATING CONNECTOR
- PRODUCT SPECIFICATION: GS-12-1291.
- REEL PACKING AS PER GS-14-2419.
- APPLICATION SPECIFICATION : GS-20-0399
- THIS LF PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
- PRODUCT NUMBER SCHEME:

10132448-1 X 1 X LF

LEAD FREE

PLATING TYPE:
BLANK: POST-PLATED

PLATING CODE:
1: GOLD FLASH OVERALL
2: 60u" MIN MATTE TIN OVERALL

Amphenol FCI

© 2016 AFCl

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO 1101		mm		MINITEK PWR 3.0 HCC	
ltr		ecn no		dr		date		title	
A		TAI		2015-02-25		angles		PLUG CRIMP TERMINAL	
B		ELX-T-22964		TAI		2016-01-06		HIGH CURRENT WIRE CONNECTOR	
C		ELX-N-26528		TONY		2017-03-31		dwg no	
D		ELX-I-43460		AKHIL		2022-01-21		sheet 1 of 1 size	
				engr		KENNY TAI		10132448	
				chr		AKHIL RAJAN		A3	
				appd		MITHUN PAUL		type	
						SPK		Product Customer Drawing	
sheet index		revision sheet		D		1			