


This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AMOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AMOR. © 2019 AMOR



Halogen free

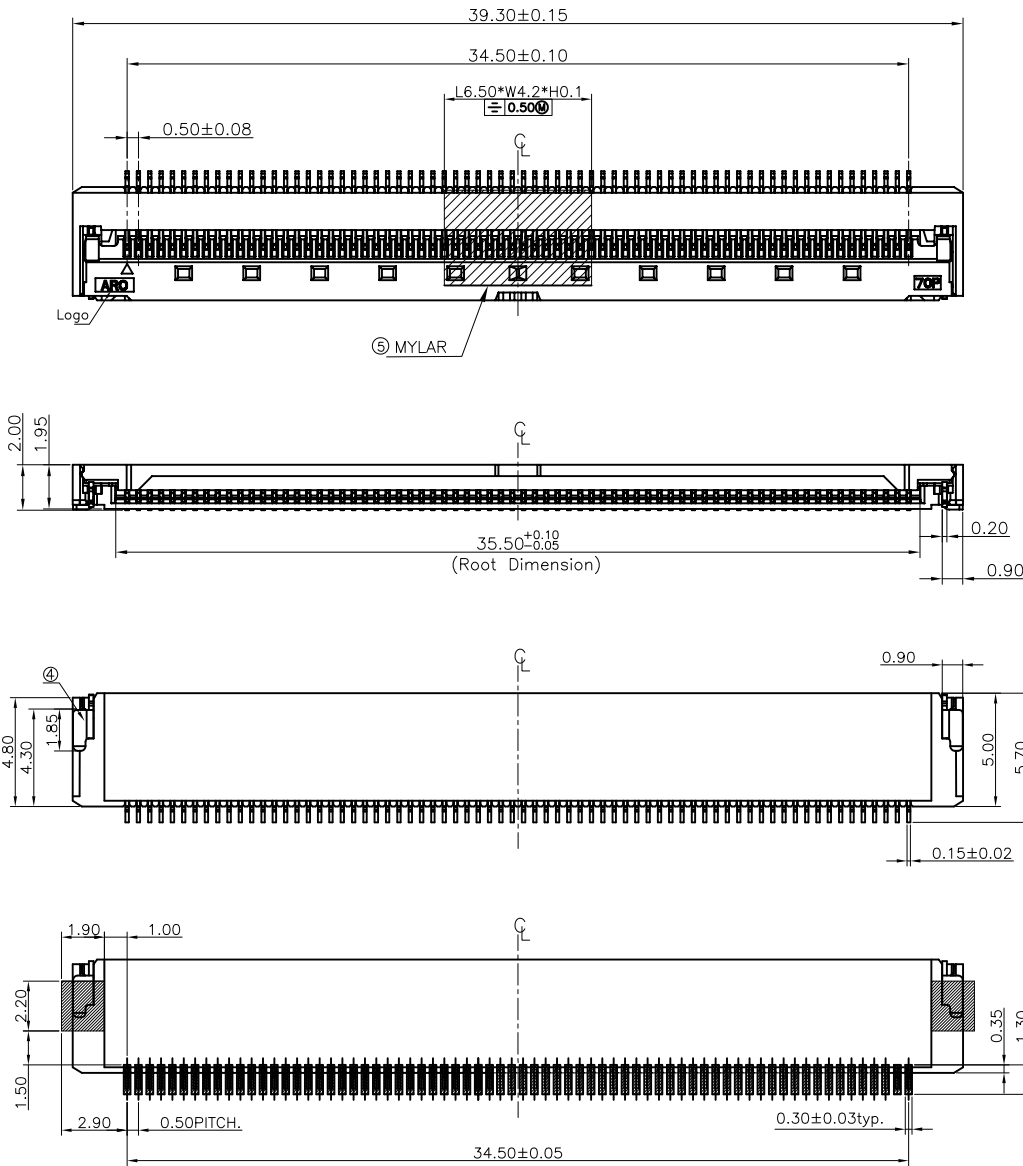

RECOMMEND PCB LAYOUT;TOL:±0.05

REV.	ECR/ECN No.	DESCRIPTION	DRAWN/DATE	CHECKED/DATE	APPROVED/DATE
X1	/	New version	May 2020-02-14	Rain.Han 2020-02-14	Leo.Liu 2020-02-14

NO.	COMPONENTS	MATERIALS	FINISH/COLOR	SPECIFICATION	QTY
1	HOUSING	HIGH TEMPERATURE PLASTIC UL94V-0	Black		1
2	ACTUATOR	HIGH TEMPERATURE PLASTIC UL94V-0	Black		1
3	TERMINAL	PHOSPHOR BRONZE T=0.15mm	UNDER PLATING:1~3μm Ni SURFACE PLATING: Contact Area:0.075~0.125μm Au		70
4	STATOR	BRASS,C2680-H T=0.20mm	UNDER PLATING:1~3μm Ni SURFACE PLATING:2~5μm Sn		2
5	MYLAR	T=0.10mm THERMOSTABLE	Yellow		1

NOTE:

1.ALL MATERIAL MUST BE COMPLY WITH RoHS.

2.THIS DRAWING IS ONLY FOR Cisco





3.PART NO. LEGEND:

F305-1B7H1-21070-E100

1: WITH MYLAR

NO. OF POSITIONS

1B:Black

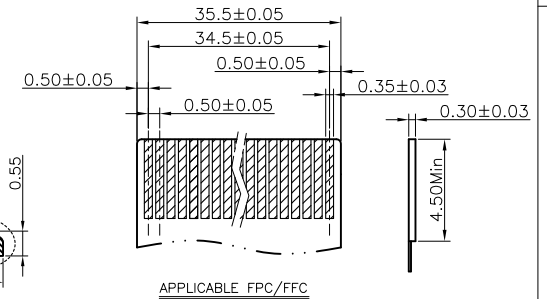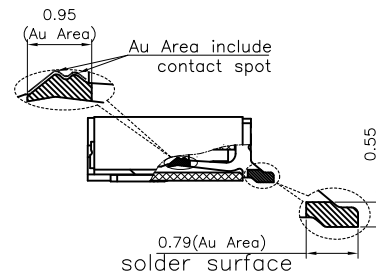

2020.03.17

文件发行

UNLESS OTHERWISE SPECIFIED TOLERANCES			ANGLE OF PROJECTION		Amphenol AORORA	
X.	±0.30	X. °	± 5'		Amphenol Aorora Technology (Huizhou) Co.,Ltd	
X.X	±0.25	X.X °	± 4'			
X.XX	±0.20	X.XX °	± 3'	DOC TYP	Customer Drw	
X.XXX	±0.15	X.XXX °	± 2'	DRAWN	DATE	May 2020-02-14
LINEAR DIMS		ANGLES DIMS		DESIGN	DATE	May 2020-02-14
DWG NO.:	A-S0580			CHECKED	DATE	Rain.Han 2020-02-14
MATERIAL	SEE NOTES			APPROVED	DATE	Leo.Liu 2020-02-14
FINISHED	SEE NOTES			SCALE	5:1	UNIT : mm SHEET 1 OF 2
				TITLE:	FFC/FPC P0.50 H2.0 front side filp_"L" type fixed plate 70pin	
				SIZE	PART NUMBER:	F305-1B7H1-21070-E100
				REV.	X1	

1 | 2 | 3 | 4

1. PACKING INTO REEL:

REV.	ECR/ECN No.	DESCRIPTION	DRAWN/DATE	CHECKED/DATE	APPROVED/DATE
X1	/	NEW RELEASE	May 2020-02-14	Rain.Han 2020-02-14	Leo.Liu 2020-02-14

NOTES:

- MATERIAL:
  - CARRY TAPE:HIPS,T=0.35±0.05mm,CLEAR
  - REEL:HIPS,
  - SHIM:PE,CLEAR.
- PRIMARY PACKING:2000PCS/REEL;10,000pcs/Carton
- SECONDARY PACKING:SEE PACKING LIST
- PEELING RESISTANCE: 0.1~0.7N(10~70gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

2:PACKING INTO OUTER BOX

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AMOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AMOR. © 2019 AMOR

2020.03.17  
文件发行

UNLESS OTHERWISE SPECIFIED TOLERANCES		ANGLE OF PROJECTION		 Amphenol Aorora Technology (Huizhou) Co.,Ltd	
X	±0.30	X.X	± 5'		
X.X	±0.25	X.X	± 4'	PART NUMBER: F305-1B7H1-21070-E100	
X.XX	±0.20	X.XX	± 3'	SCALE: 1:1    UNIT: mm    SHEET 2 OF 2	
X.XXX	±0.15	X.XXX	± 2'	REV. X1	
LINEAR DIMS		ANGLES DIMS		SIZE: A4	
DWG No.: A-S0580		MATERIAL: SEE NOTES		APPROVED DATE: Leo.liu 2020-02-14	
FINISHED: SEE NOTES		MATERIAL: SEE NOTES		APPROVED DATE: Leo.liu 2020-02-14	

1 | 2 | 3 | 4

Aor-QR-0406-A