



# intertherm®

## Product Catalog

# A2L E7ED Downflow Electric Furnaces



## Unique Manufactured Housing Design

With a robust, 20"W, fully-insulated cabinet to fit the classic MH footprint for replacement opportunities. The E7 is the most versatile, future-friendly, HUD-compliant, MH electric furnace available.

## 4-Ton AC-Ready ECM Blower

16 dip-switch speed-settings and factory or field-installed 31 1/2"H coil box to support increasing coil sizes needed to meet increasing DOE minimum-efficiencies. (High-static blower kit #1044062 also available).

## Modern Controls

Quiet heater relays and an integrated control board, eliminating the need for an additional time-delay relay for split systems.

## New & Replacement Application Accessories

Save the hassle of sourcing materials, field-fabrication, and repeat supply-house trips and depend on Warranty and Support handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.


### ACCESSORIES ALSO AVAILABLE



Item #	Model	Heating Output (kW)	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
			PACKAGING DIMENSIONS		Furnace Coil Box Height			
101100028	E7ED-B010K1	9.2	24-1/2"D x 20"W x 60-5/8"H 26-1/2"D x 21"W x 62"H	112 lbs	Yes 31-1/2"H	Downflow	Bottom, Ducted	Front, Open (Top-Ducted, Optional)
101100029	E7ED-B012K1	10.7	24-1/2"D x 20"W x 60-5/8"H 26-1/2"D x 21"W x 62"H	112 lbs	Yes 31-1/2"H	Downflow	Bottom, Ducted	Front, Open (Top-Ducted, Optional)
101100030	E7ED-B015K1	13.8	24-1/2"D x 20"W x 60-5/8"H 26-1/2"D x 21"W x 62"H	112 lbs	Yes 31-1/2"H	Downflow	Bottom, Ducted	Front, Open (Top-Ducted, Optional)
101100031	E7ED-B017K1	14.9	24-1/2"D x 20"W x 60-5/8"H 26-1/2"D x 21"W x 62"H	112 lbs	Yes 31-1/2"H	Downflow	Bottom, Ducted	Front, Open (Top-Ducted, Optional)
101100032	E7ED-B020K1	18.4	24-1/2"D x 20"W x 60-5/8"H 26-1/2"D x 21"W x 62"H	112 lbs	Yes 31-1/2"H	Downflow	Bottom, Ducted	Front, Open (Top-Ducted, Optional)
101100033	E7ED-B023K1	19.8	24-1/2"D x 20"W x 60-5/8"H 26-1/2"D x 21"W x 62"H	112 lbs	Yes 31-1/2"H	Downflow	Bottom, Ducted	Front, Open (Top-Ducted, Optional)

Item #	Model	Heater Banks	Blower Specifications	Supply Circuit(s): Total Current	MCA Single	MOP Single
					Dual Circuit A	Dual Circuit A
101100028	E7ED-B010K1	2	ECM, 1/2hp, 16spd, 4T	Single: 43.7 A	54.7 A	60 A
101100029	E7ED-B012K1	2	ECM, 1/2hp, 16spd, 4T	Single: 50.1 A Dual-A: 27.0 A	62.6 A 33.7 A	70 A 35 A
101100030	E7ED-B015K1	3	ECM, 1/2hp, 16spd, 4T	Dual-B: 23.2 A Single: 63.7 A Dual-A: 43.7 A	28.9 A 79.6 A 54.7 A	30 A 80 A 60 A
101100031	E7ED-B017K1	3	ECM, 1/2hp, 16spd, 4T	Dual-B: 20.0 A Single: 68.5 A Dual-A: 43.1 A	25.0 A 85.6 A 53.9 A	25 A 90 A 60 A
101100032	E7ED-B020K1	4	ECM, 1/2hp, 16spd, 4T	Dual-B: 25.4 A Single: 83.7 A Dual-A: 43.7 A	31.7 A 104.6 A 54.7 A	35 A 110 A 60 A
101100033	E7ED-B023K1	4	ECM, 1/2hp, 16spd, 4T	Dual-B: 39.9 A Single: 90.1 A Dual-A: 43.7 A	49.9 A 112.6 A 54.7 A	50 A 125 A 125 A
				Dual-B: 46.3 A	57.9 A	60 A

## E7ED

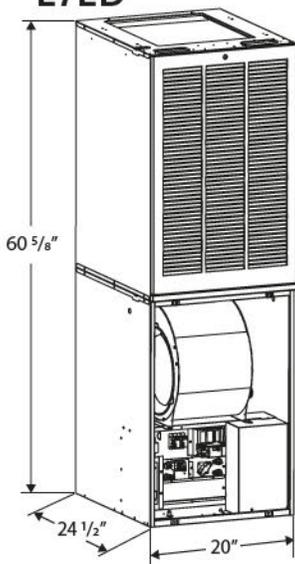

# A2L E7EU Upflow Electric Furnaces



## Unique Manufactured Housing Design

With a robust, 20"W, fully-insulated cabinet to fit the classic MH footprint for replacement opportunities. The E7 is the most versatile, future-friendly, HUD-compliant, MH electric furnace available.

## 4-Ton AC-Ready ECM Blower

16 dip-switch speed-settings and factory or field-installed 31 1/2"H coil box to support increasing coil sizes needed to meet increasing DOE minimum-efficiencies. (High-static blower kit #1044062 also available).

## Modern Controls

Quiet heater relays and an integrated control board, eliminating the need for an additional time-delay relay for split systems.

## New & Replacement Application Accessories


Save the hassle of sourcing materials, field-fabrication, and repeat supply-house trips and depend on Warranty and Support handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.

### ACCESSORIES ALSO AVAILABLE



Item #	Model	Heating Output (kW)	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
			PACKAGING DIMENSIONS		Furnace Coil Box Height			
101100040	E7EU-B010K1	9.2	24-1/2"D x 20"W x 60-5/8"H	112 lbs	Yes	Upflow	Top, Ducted	Bottom, Ducted
101100041	E7EU-B012K1	10.7	24-1/2"D x 20"W x 60-5/8"H	112 lbs	Yes	Upflow	Top, Ducted	Bottom, Ducted
101100042	E7EU-B015K1	13.8	24-1/2"D x 20"W x 60-5/8"H	112 lbs	Yes	Upflow	Top, Ducted	Bottom, Ducted
101100043	E7EU-B017K1	14.9	24-1/2"D x 20"W x 60-5/8"H	112 lbs	Yes	Upflow	Top, Ducted	Bottom, Ducted
101100044	E7EU-B020K1	18.4	24-1/2"D x 20"W x 60-5/8"H	112 lbs	Yes	Upflow	Top, Ducted	Bottom, Ducted
101100045	E7EU-B023K1	19.8	24-1/2"D x 20"W x 60-5/8"H	112 lbs	Yes	Upflow	Top, Ducted	Bottom, Ducted

Item #	Model	Heater Banks	Blower Specifications	Supply Circuit(s): Total Current	MCA Single	MOP Single
					Dual Circuit A	Dual Circuit A
101100040	E7EU-B010K1	2	ECM, 1/2hp, 16spd, 4T	Single: 43.7 A	54.7 A	60 A
101100041	E7EU-B012K1	2	ECM, 1/2hp, 16spd, 4T	Single: 50.1 A	62.6 A	70 A
				Dual-A: 27.0 A	33.7 A	35 A
				Dual-B: 23.2 A	28.9 A	30 A
101100042	E7EU-B015K1	3	ECM, 1/2hp, 16spd, 4T	Single: 63.7 A	79.6 A	80 A
				Dual-A: 43.7 A	54.7 A	60 A
				Dual-B: 20.0 A	25.0 A	25 A
101100043	E7EU-B017K1	3	ECM, 1/2hp, 16spd, 4T	Single: 68.5 A	85.6 A	90 A
				Dual-A: 43.1 A	53.9 A	60 A
				Dual-B: 25.4 A	31.7 A	35 A
101100044	E7EU-B020K1	4	ECM, 1/2hp, 16spd, 4T	Single: 83.7 A	104.6 A	110 A
				Dual-A: 43.7 A	54.7 A	60 A
				Dual-B: 39.9 A	49.9 A	50 A
101100045	E7EU-B023K1	4	ECM, 1/2hp, 16spd, 4T	Single: 90.1 A	112.6 A	125 A
				Dual-A: 43.7 A	54.7 A	60 A
				Dual-B: 46.3 A	57.9 A	60 A

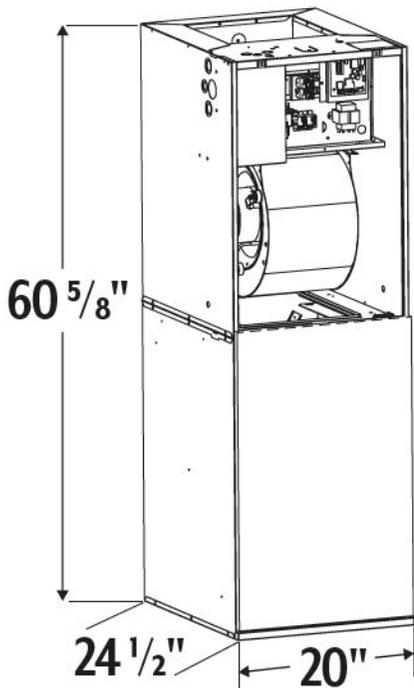

## A2L E7EM Multi-Poise (Up/Downflow) Electric Furnaces



### Unique Manufactured Housing Design

With a robust, 20"W, fully-insulated cabinet to fit the classic MH footprint for replacement opportunities. The E7 is the most versatile, future-friendly, HUD-compliant, MH electric furnace available.

### 4-Ton AC-Ready ECM Blower

16 dip-switch speed-settings and factory or field-installed 31 1/2"H coil box to support increasing coil sizes needed to meet increasing DOE minimum-efficiencies. (High-static blower kit #1044062 also available).

### Modern Controls

Quiet heater relays and an integrated control board, eliminating the need for an additional time-delay relay for split systems.

### New & Replacement Application Accessories

Save the hassle of sourcing materials, field-fabrication, and repeat supply-house trips and depend on Warranty and Support handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.


### ACCESSORIES ALSO AVAILABLE



Item #	Model	Heating Output (kW)	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
			Packaging Dimensions					
101100034	E7EM-B010K1	9.2	24-1/2"D x 20"W x 29"H	74.5 lbs	None <sup>1</sup>	Downflow	Field-Configured	Field-Configured
101100035	E7EM-B012K1	10.7	26-1/2"D x 21"W x 30"H	75 lbs	None <sup>1</sup>	Downflow	Field-Configured	Field-Configured
101100036	E7EM-B015K1	13.8	24-1/2"D x 20"W x 29"H	73 lbs	None <sup>1</sup>	Downflow	Field-Configured	Field-Configured
101100037	E7EM-B017K1	14.9	26-1/2"D x 21"W x 30"H	76.5 lbs	None <sup>1</sup>	Downflow	Field-Configured	Field-Configured
101100038	E7EM-B020K1	18.4	24-1/2"D x 20"W x 29"H	76.5 lbs	None <sup>1</sup>	Downflow	Field-Configured	Field-Configured
101100039	E7EM-B023K1	19.8	26-1/2"D x 21"W x 30"H	76.5 lbs	None <sup>1</sup>	Downflow	Field-Configured	Field-Configured

Item #	Model	Heater Banks	Blower Specifications	Supply Circuit	MCA	MOP
					Dual Circuit A Dual Circuit B	Dual Circuit A Dual Circuit B
101100034	E7EM-B010K1	2	ECM, 1/2hp, 16spd, 4T	Single: 43.7 A Single: 50.1 A	54.7 A 62.6 A	60 A 70 A
101100035	E7EM-B012K1	2	ECM, 1/2hp, 16spd, 4T	Dual-A: 27.0 A Dual-B: 23.2 A Single: 63.7 A	33.7 A 28.9 A 79.6 A	35 A 30 A 80 A
101100036	E7EM-B015K1	3	ECM, 1/2hp, 16spd, 4T	Dual-A: 43.7 A Dual-B: 20.0 A Single: 68.5 A	54.7 A 25.0 A 85.6 A	60 A 25 A 90 A
101100037	E7EM-B017K1	3	ECM, 1/2hp, 16spd, 4T	Dual-A: 43.1 A Dual-B: 25.4 A Single: 83.7 A	53.9 A 31.7 A 104.6 A	60 A 35 A 110 A
101100038	E7EM-B020K1	4	ECM, 1/2hp, 16spd, 4T	Dual-A: 43.7 A Dual-B: 39.9 A Single: 90.1 A	54.7 A 49.9 A 112.6 A	60 A 50 A 125 A
101100039	E7EM-B023K1	4	ECM, 1/2hp, 16spd, 4T	Dual-A: 43.7 A Dual-B: 46.3 A	54.7 A 57.9 A	60 A 60 A

<sup>1</sup>) If adding a central air split system, you should also order a separate field-installed coil box, listed with the Furnace Accessories products.

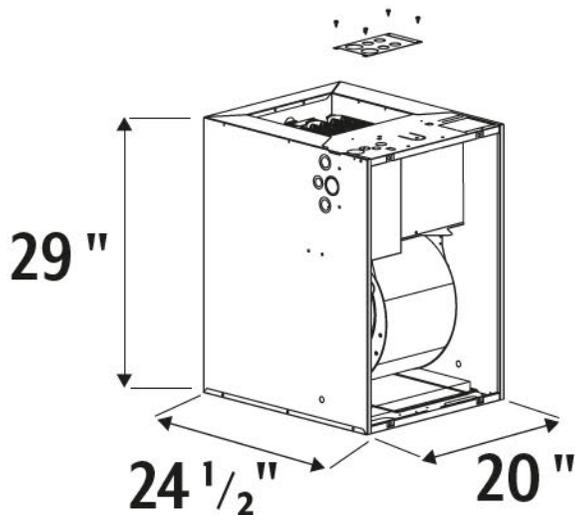

# A2L MG2S 96% AFUE 2-Stage MH Gas Furnaces



## Highest-Efficiency MH Gas Furnace

Uniquely designed to be HUD-compliant with a robust 19 7/8"W, fully-insulated cabinet to fit the traditional MH furnace footprint.

## 2-Stage Gas Valve

Allows for true, low-fire furnace operation to produce as little as half of the rated full-capacity, preventing short cycling in smaller spaces and reducing energy consumption.

## AC-Ready Options

Include a factory-installed 20"H coil box and an ECM blower with 16 dip-switch speed-settings, for up to 4-Tons nominal cooling. Refer to Split System sell sheets for AHRI-rated coil-fit matches.

## Simple LP Conversion

With an easy-access gas valve regulator and manifold assembly; LP components are factory-supplied with the unit.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.


### ACCESSORIES ALSO AVAILABLE



Item #	Model	Rated Heating Input	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
		Output	Packaging Dimensions					
101100062	MG2S-B045F2ABM1	45 MBH	24-5/8"D x 19-7/8"W x 76"H	179 lbs	Yes	Downflow	Bottom, Ducted	Front, Open
		43.2 MBH	26-1/2"D x 21-1/2"W x 78"H					
101100063 <sup>1</sup>	MG2S-B045T2ABM1	45 MBH	24-5/8"D x 19-7/8"W x 76"H	177 lbs	Yes	Downflow	Bottom, Ducted	Top, Ducted
		43.2 MBH	26-1/2"D x 21-1/2"W x 78"H					
101100066	MG2S-B072F2ABM1	72 MBH	24-5/8"D x 19-7/8"W x 76"H	186 lbs	Yes	Downflow	Bottom, Ducted	Front, Open
		69.1 MBH	26-1/2"D x 21-1/2"W x 78"H					
101100067 <sup>1</sup>	MG2S-B072T2ABM1	72 MBH	24-5/8"D x 19-7/8"W x 76"H	184 lbs	Yes	Downflow	Bottom, Ducted	Top, Ducted
		69.1 MBH	26-1/2"D x 21-1/2"W x 78"H					

Item #	Model	Low-fire Input	Blower Specifications	Rated Heating Input	MOP
		Low-fire Output		Output	
101100062	MG2S-B045F2ABM1	29 MBH	ECM, 3/4hp, 16spd, 4T	45 MBH	15 A
		27.8 MBH		43.2 MBH	
101100063 <sup>1</sup>	MG2S-B045T2ABM1	29 MBH	ECM, 3/4hp, 16spd, 4T	45 MBH	15 A
		27.8 MBH		43.2 MBH	
101100064	MG2S-B060F2ABM1	39 MBH	ECM, 3/4hp, 16spd, 4T	60 MBH	15 A
		37.4 MBH		57.6 MBH	
101100065 <sup>1</sup>	MG2S-B060T2ABM1	39 MBH	ECM, 3/4hp, 16spd, 4T	60 MBH	15 A
		37.4 MBH		57.6 MBH	
101100066	MG2S-B072F2ABM1	47 MBH	ECM, 3/4hp, 16spd, 4T	72 MBH	15 A
		45.1 MBH		69.1 MBH	
101100067 <sup>1</sup>	MG2S-B072T2ABM1	47 MBH	ECM, 3/4hp, 16spd, 4T	72 MBH	15 A
		45.1 MBH		69.1 MBH	

<sup>1</sup> These items are available as drop-ship only (not stocked), where a non-cancellable order minimum and longer lead-time may apply.

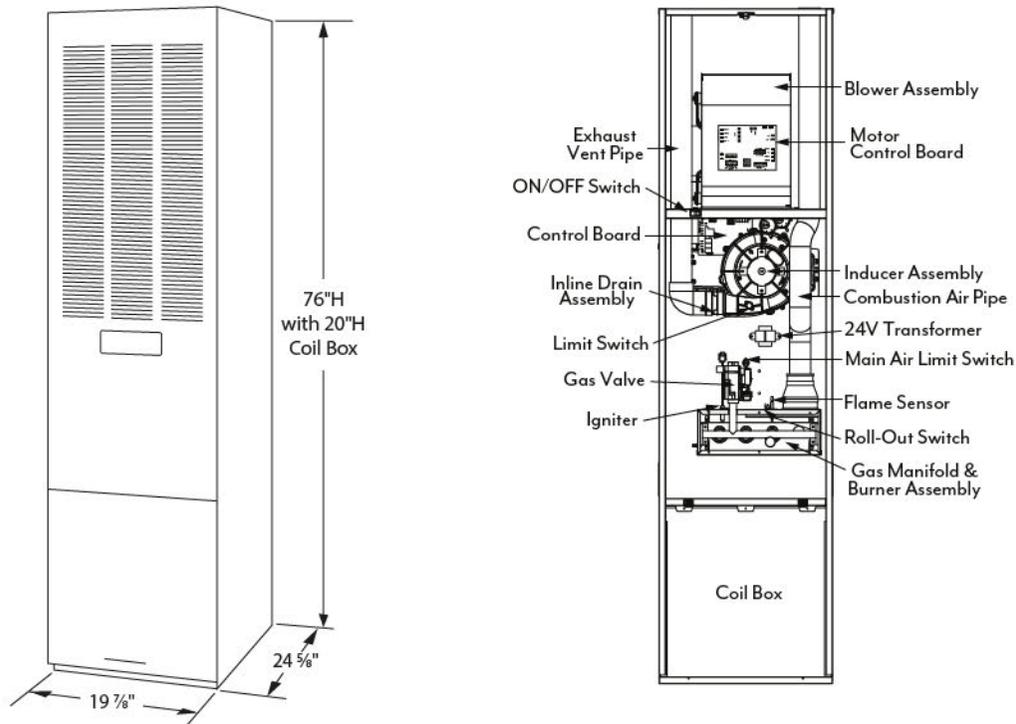

# A2L MG2R 95% AFUE High-Efficiency MH Gas Furnaces



## Unique Manufactured Housing Design

With a robust, 19-7/8"W, fully-insulated cabinet to fit the standard MH footprint, it's the premiere high-efficiency, HUD-compliant, gas furnace.

## AC-Ready 4-Ton ECM Blower

With 5-speed taps, with/without a factory-installed 27-1/4"H coil box; where MG2R\*A allows for a field-installed 20"H or 26"H coil box to suit your capacity, height-limit, or stocking needs.

## Quick LP Conversion

With an easy-access gas valve regulator and manifold, using the factory-provided LP orifices included in the unit-literature kit.


## Category IV Venting Approval

Allows for vertical or horizontal direct venting using an approved non-metallic two-pipe system, or a concentric termination kit for application flexibility.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.

### ACCESSORIES ALSO AVAILABLE

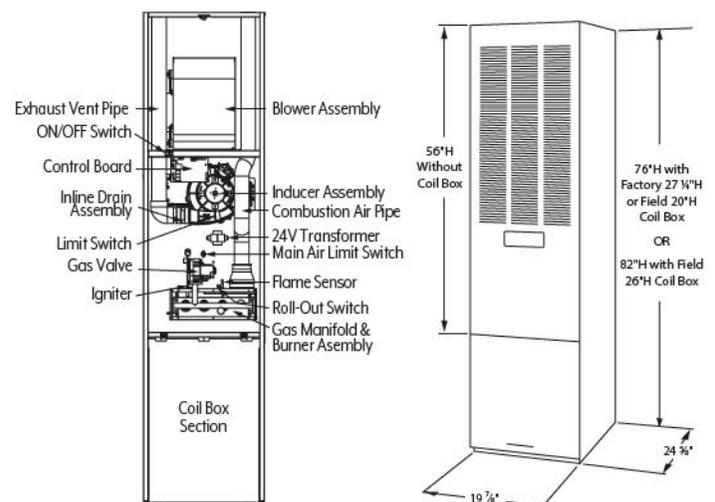

Item #	Model	Rated Heating Input Output	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
			Packaging Dimensions					
101100050	MG2R-B045F1AAM1	45 MBH	24-5/8"D x 19-7/8"W x 56"H	154 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
		43 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100051	MG2R-B045F1ACM1	45 MBH	24-5/8"D x 19-7/8"W x 76"H	174 lbs	Yes 27-1/4"H	Downflow	Bottom, Ducted	Front, Open
		43 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					
101100052 <sup>3</sup>	MG2R-B045T1AAM1	45 MBH	24-5/8"D x 19-7/8"W x 56"H	152 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Top, Ducted
		43 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100053 <sup>3</sup>	MG2R-B045T1ACM1	45 MBH	24-5/8"D x 19-7/8"W x 76"H	172 lbs	Yes 27-1/4"H	Downflow	Bottom, Ducted	Top, Ducted
		43 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					
101100054	MG2R-B060F1AAM1	60 MBH	24-5/8"D x 19-7/8"W x 56"H	154 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
		57 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100055	MG2R-B060F1ACM1	60 MBH	24-5/8"D x 19-7/8"W x 76"H	176 lbs	Yes 27-1/4"H	Downflow	Bottom, Ducted	Front, Open
		57 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					
101100056 <sup>3</sup>	MG2R-B060T1AAM1	60 MBH	24-5/8"D x 19-7/8"W x 56"H	152 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Top, Ducted
		57 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100057 <sup>3</sup>	MG2R-B060T1ACM1	60 MBH	24-5/8"D x 19-7/8"W x 76"H	172 lbs	Yes 27-1/4"H	Downflow	Bottom, Ducted	Top, Ducted
		57 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					
101100058	MG2R-B072F1AAM1	72 MBH	24-5/8"D x 19-7/8"W x 56"H	160 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
		68 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100059	MG2R-B072F1ACM1	72 MBH	24-5/8"D x 19-7/8"W x 76"H	180 lbs	Yes 27-1/4"H	Downflow	Bottom, Ducted	Front, Open
		68 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					
101100060 <sup>3</sup>	MG2R-B072T1AAM1	72 MBH	24-5/8"D x 19-7/8"W x 56"H	159 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Top, Ducted
		68 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100061 <sup>3</sup>	MG2R-B072T1ACM1	72 MBH	24-5/8"D x 19-7/8"W x 76"H	178 lbs	Yes 27-1/4"H	Downflow	Bottom, Ducted	Top, Ducted
		68 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					

Item #	Model	NG Orifice <sup>2</sup> LP Orifice <sup>2</sup>	Orifice Qty.	Blower Specifications	Rated Heating Input Output	MCA	MOP
101100050	MG2R-B045F1AAM1	49	3	ECM, 3/4hp, 5spd, 4T	45 MBH	13.44	20 A
		57			43 MBH		
101100051	MG2R-B045F1ACM1	49	3	ECM, 3/4hp, 5spd, 4T	45 MBH	13.44	20 A
		57			43 MBH		
101100052 <sup>3</sup>	MG2R-B045T1AAM1	49	3	ECM, 3/4hp, 5spd, 4T	45 MBH	13.44	20 A
		57			43 MBH		
101100053 <sup>3</sup>	MG2R-B045T1ACM1	49	3	ECM, 3/4hp, 5spd, 4T	45 MBH	13.44	20 A
		57			43 MBH		
101100054	MG2R-B060F1AAM1	45	3	ECM, 3/4hp, 5spd, 4T	60 MBH	13.44	20 A
		55			57 MBH		
101100055	MG2R-B060F1ACM1	45	3	ECM, 3/4hp, 5spd, 4T	60 MBH	13.44	20 A
		55			57 MBH		
101100056 <sup>3</sup>	MG2R-B060T1AAM1	45	3	ECM, 3/4hp, 5spd, 4T	60 MBH	13.44	20 A
		55			57 MBH		
101100057 <sup>3</sup>	MG2R-B060T1ACM1	45	3	ECM, 3/4hp, 5spd, 4T	60 MBH	13.44	20 A
		55			57 MBH		
101100058	MG2R-B072F1AAM1	47	4	ECM, 3/4hp, 5spd, 4T	72 MBH	13.44	20 A
		56			68 MBH		
101100059	MG2R-B072F1ACM1	47	4	ECM, 3/4hp, 5spd, 4T	72 MBH	13.44	20 A
		56			68 MBH		
101100060 <sup>3</sup>	MG2R-B072T1AAM1	47	4	ECM, 3/4hp, 5spd, 4T	72 MBH	13.44	20 A
		56			68 MBH		
101100061 <sup>3</sup>	MG2R-B072T1ACM1	47	4	ECM, 3/4hp, 5spd, 4T	72 MBH	13.44	20 A
		56			68 MBH		

1) If adding a central air split system, you must also order a separate field-installed coil box, listed in the Application Accessories table below.

2) Orifice will vary with altitude; consult the unit installation instructions for correct orifice selection for your application and altitude.

3) These items are available as drop-ship only (not stocked), where a non-cancellable order minimum and longer lead-time may apply.

# A2L MG1E 80% AFUE MH Gas Furnaces



## Unique Manufactured Housing Design

With a robust, 20"W, fully-insulated cabinet to fit the standard MH footprint; the MG1E is our most economical, HUD-compliant, gas furnace.

## AC-Ready 4-Ton ECM Blower

With 5-speed taps, with/without a factory-installed 20"H coil box; allowing for a field-installed 20"/26"H coil box to suit your capacity and access needs. Refer to Split System sell sheets for AHRI-rated coil-fit matches.

## Quick LP Conversion

With an easy-access gas valve regulator and manifold assembly; using the factory-supplied LP orifice, included with the unit.

## Numerous Application Accessories

Save the hassle of field-fabrication, sourcing and repeat supply-house trips; on new or replacement jobs.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.



### ACCESSORIES ALSO AVAILABLE



Item #	Model	AHRI Cert. #	Rated Heating Input	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
			Output	Packaging Dimensions					
101100068	MG1E-B056F1AAM1	215447728	56 MBH	23-3/4"D x 19-3/4"W x 56"H	156 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
			45 MBH	26-1/2"D x 21-5/8"W x 58-1/8"H					
101100069	MG1E-B056F1ABM1	215447728	56 MBH	23-3/4"D x 19-3/4"W x 76"H	168 lbs	Yes 20"H	Downflow	Bottom, Ducted	Front, Open
			45 MBH	26-1/2"D x 21-5/8"W x 78-1/8"H					
101100071	MG1E-B070F1ABM1	215447729	70 MBH	23-3/4"D x 19-3/4"W x 76"H	169 lbs	Yes 20"H	Downflow	Bottom, Ducted	Front, Open
			57 MBH	26-1/2"D x 21-5/8"W x 78-1/8"H					
101100072	MG1E-B077F1AAM1	215447730	77 MBH	23-3/4"D x 19-3/4"W x 56"H	156 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
			62 MBH	26-1/2"D x 21-5/8"W x 58-1/8"H					
101100073	MG1E-B077F1ABM1	215447730	77 MBH	23-3/4"D x 19-3/4"W x 76"H	174 lbs	Yes 20"H	Downflow	Bottom, Ducted	Front, Open
			62 MBH	26-1/2"D x 21-5/8"W x 78-1/8"H					
101100074	MG1E-B090F1AAM1	215447731	85 MBH	23-3/4"D x 19-3/4"W x 56"H	156 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
			67 MBH	26-1/2"D x 21-5/8"W x 58-1/8"H					
101100075	MG1E-B090F1ABM1	215447731	85 MBH	23-3/4"D x 19-3/4"W x 76"H	171 lbs	Yes 20"H	Downflow	Bottom, Ducted	Front, Open
			67 MBH	26-1/2"D x 21-5/8"W x 78-1/8"H					

Item #	Model	NG Orifice	Orifice Qty.	Blower Specifications	Rated Cooling Output	Rated Heating Input	MCA	MOP
		LP Orifice				Output		
101100068	MG1E-B056F1AAM1	29	1	ECM, 3/4hp, 5spd, 4T	4T	56 MBH	11.8	15 A
		45				45 MBH		
101100069	MG1E-B056F1ABM1	29	1	ECM, 3/4hp, 5spd, 4T	4T	56 MBH	11.8	15 A
		45				45 MBH		
101100070	MG1E-B070F1AAM1	24	1	ECM, 3/4hp, 5spd, 4T	4T	70 MBH	11.8	15 A
		42				57 MBH		
101100071	MG1E-B070F1ABM1	24	1	ECM, 3/4hp, 5spd, 4T	4T	70 MBH	11.8	15 A
		42				57 MBH		
101100072	MG1E-B077F1AAM1	21	1	ECM, 3/4hp, 5spd, 4T	4T	77 MBH	11.8	15 A
		40				62 MBH		
101100073	MG1E-B077F1ABM1	21	1	ECM, 3/4hp, 5spd, 4T	4T	77 MBH	11.8	15 A
		40				62 MBH		
101100074	MG1E-B090F1AAM1	17	1	ECM, 3/4hp, 5spd, 4T	4T	85 MBH	11.8	15 A
		36				67 MBH		
101100075	MG1E-B090F1ABM1	17	1	ECM, 3/4hp, 5spd, 4T	4T	85 MBH	11.8	15 A
		36				67 MBH		

1) If adding a central air split system, you must also order a separate field-installed coil box, listed in the Application Accessories table below.

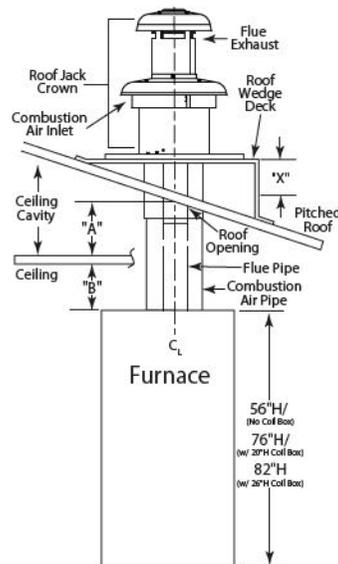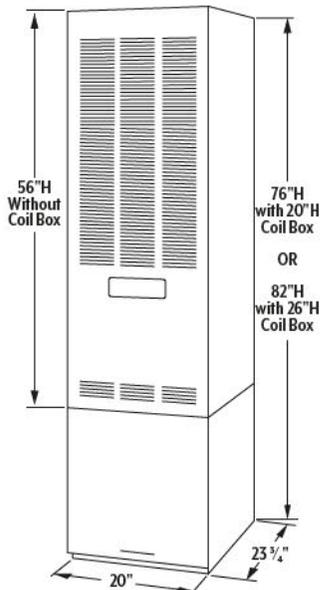

# CMF3 80% AFUE Replacement MH Gas Furnace



## 18" Wide Cabinet

Accommodates tight replacement jobs, often found in the oldest Manufactured Homes.

## Several Application Accessories

Allow for convenient adaptation to an original installation, saving field fabrication and sourcing time.

## 5-speed Constant Torque ECM Blower

Provides efficient, quiet and comfortable operation with resized fan switches, eliminating nuisance cycling.

## Tilt-Out Door

With more louvers for improved airflow, a standard 25" x 16" x 1" disposable filter, and a plunger-style switch for ease of service.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.

### ACCESSORIES ALSO AVAILABLE





Item #	Model	AHRI Cert. #	Rated Heating Input	Item Dimensions <i>Packaging Dimensions</i>	Package Weight	Position-Application	Supply Air	Return Air
			Output					
CMF3-70T-PG2	CMF3-70T-PG2	210586012	70 MBH	24-1/4"D x 18"W x 57"H	163 lbs	Downflow	Bottom, Ducted	Front, Open
			56 MBH	26"D x 20"W x 61"H				

Item #	Model	NG Orifice	Blower Specifications	Rated Cooling Output	Rated Heating Input	MOP
		LP Orifice			Output	
CMF3-70T-PG2	CMF3-70T-PG2	22	ECM, 1/2hp, 5spd	Packaged Unit Only	70 MBH	15 A
		41			56 MBH	

1) Orifice sizing varies with altitude and firing rate; consult the installation instructions for correct orifice selection for your altitude and application.  
 NOTE: No split system option, must use a packaged unit for air conditioning.

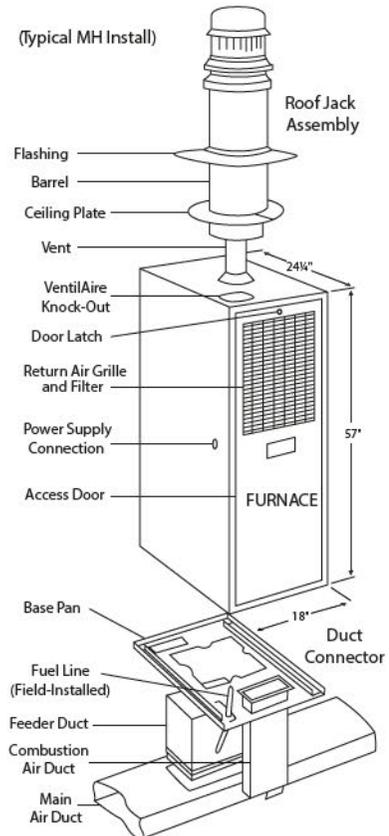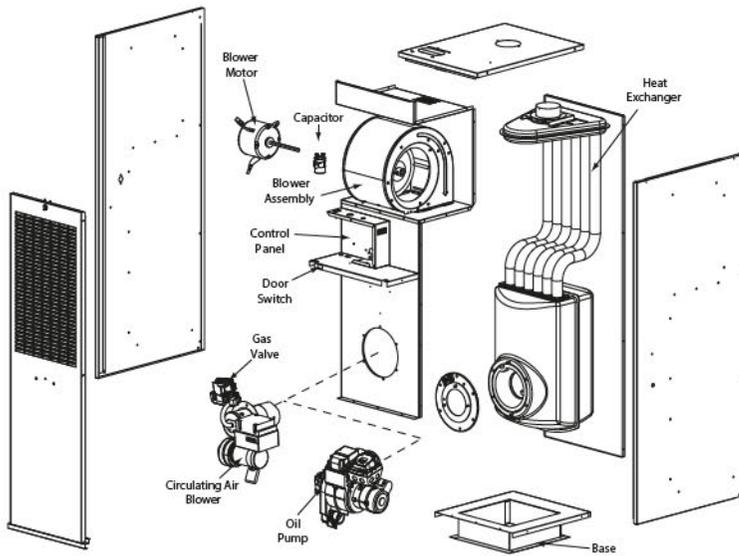

# A2L M5SB 83% AFUE Downflow MH Oil Furnaces



## Unique Manufactured Housing Design

With a robust, 19-3/4"W, fully-insulated cabinet to fit the standard MH footprint; the M5SB is our latest HUD-compliant, oil furnace.

## AC-Ready Options

A factory-installed 20"H coil box, field-installed 20"H/26"H coil box, and PSC blower upgrades for up to 5-Tons nominal cooling. Refer to Split System sell sheets for AHRI-rated, coil-fit matches.

## High-Performance Combustion System

Including a Beckett burner and drum heat exchanger, which contribute to the overall efficiency, reliability, and homeowner's peace of mind.

## Numerous Application Accessories

Save the hassle of field-fabrication, sourcing and repeat supply-house trips; on new or replacement jobs.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.


### ACCESSORIES ALSO AVAILABLE




Item #	Model	AHRI Cert. #	Rated Heating	Item Dimensions	Package Weight	Coil Box	Position-Application	Supply Air	Return Air
			Input Output	Packaging Dimensions					
101100076	M5SB-B066A-AW1	215445138	66 MBH	23-3/4"D x 19-3/4"W x 56"H	150 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
			56 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100077	M5SB-B066A-BW1	215445138	66 MBH	23-3/4"D x 19-3/4"W x 76"H	176 lbs	Yes 20"H	Downflow	Bottom, Ducted	Front, Open
			56 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					
101100078	M5SB-B086A-AW1	215445139	86 MBH	23-3/4"D x 19-3/4"W x 56"H	172 lbs	None <sup>1</sup>	Downflow	Bottom, Ducted	Front, Open
			72 MBH	26-1/2"D x 21-5/16"W x 58-1/8"H					
101100079	M5SB-B086A-BW1	215445139	86 MBH	23-3/4"D x 19-3/4"W x 76"H	187 lbs	Yes 20"H	Downflow	Bottom, Ducted	Front, Open
			72 MBH	26-1/2"D x 21-5/16"W x 78-1/8"H					

Item #	Model	Nozzle	Blower Specifications	Rated Heating	MCA	MOP
				Input Output		
101100076	M5SB-B066A-AW1	.50 Gph, 80°A	PSC, 1/4hp, 3spd, 3T	66 MBH	11.1	15 A
				56 MBH		
101100077	M5SB-B066A-BW1	.50 Gph, 80°A	PSC, 1/4hp, 3spd, 3T	66 MBH	11.1	15 A
				56 MBH		
101100078	M5SB-B086A-AW1	.65 Gph, 80°A	PSC, 1/4hp, 3spd, 3T	86 MBH	11.1	15 A
				72 MBH		
101100079	M5SB-B086A-BW1	.65 Gph, 80°A	PSC, 1/4hp, 3spd, 3T	86 MBH	11.1	15 A
				72 MBH		

1) If adding a central air split system, you must also order a separate field-installed coil box, listed in the Furnace Accessories section.

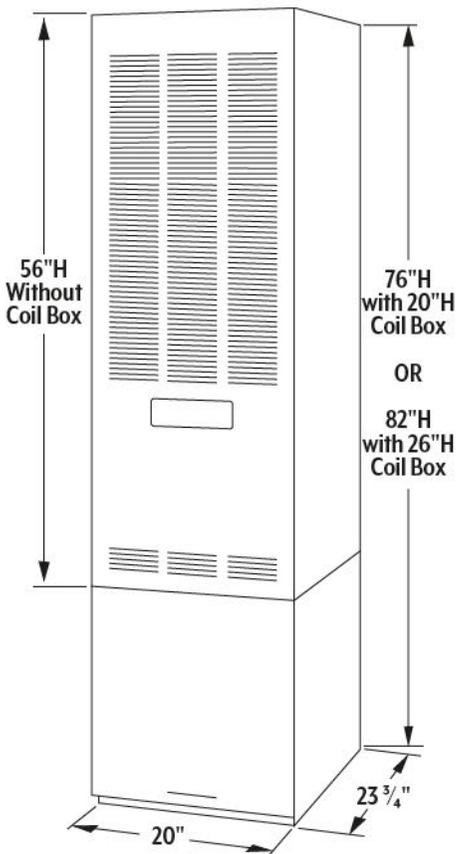

# CMF2 80% AFUE Replacement MH Oil Furnace

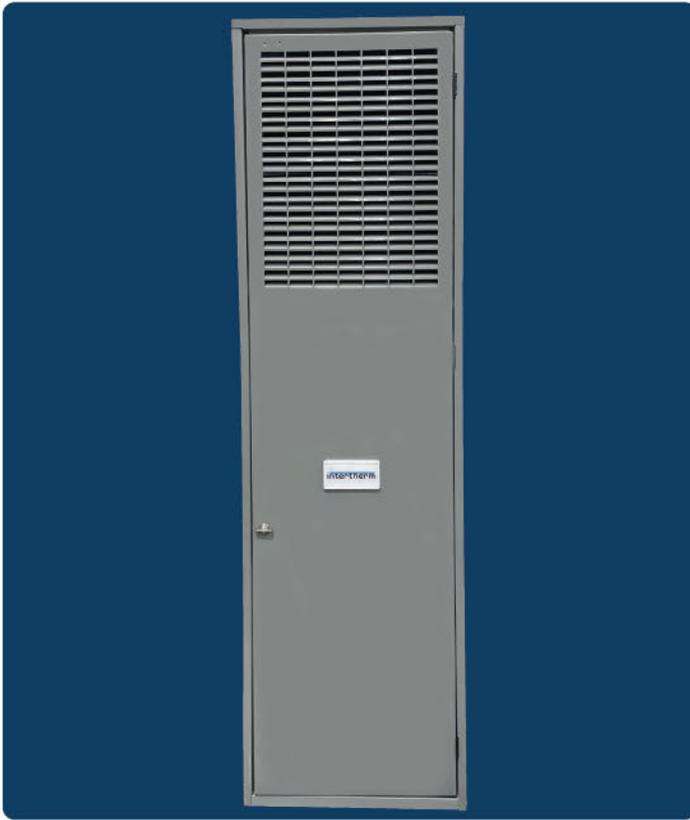

## 18" Wide Cabinet

Accommodates tight replacement jobs, often found in the oldest Manufactured Homes.

## Several Application Accessories

Allow for convenient adaptation to an original installation, saving field fabrication and sourcing time.

## 3-speed PSC Blower

Provides efficient, quiet and comfortable operation with resized auxiliary limit switch to eliminate nuisance cycling. A packaged unit is recommended for air conditioning needs.

## High-quality Beckett Oil Burners

Factory installed for extended service-life.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.

### ACCESSORIES ALSO AVAILABLE





Item #	Model	AHRI Cert. #	Rated Heating	Item Dimensions	Package Weight	Position-Application	Supply Air	Return Air
			Input Output	Packaging Dimensions				
CMF2-80-P02	CMF2-80-P02	210586005	75 MBH	24-1/4"D x 18"W x 57"H	166 lbs	Downflow	Bottom, Ducted	Front, Open
			60 MBH	26"D x 20"W x 61"H				



Item #	Model	Nozzle	Blower Specifications	Rated Heating	MOP
				Input Output	
CMF2-80-P02	CMF2-80-P02	0.60 Gph, A, 80°	PSC, 1/4hp, 3spd	75 MBH	15 A
				60 MBH	

1) Orifice sizing varies with altitude and firing rate; consult the installation instructions for correct orifice selection for your altitude and application.

NOTE: No split system option, must use a packaged unit for air conditioning.

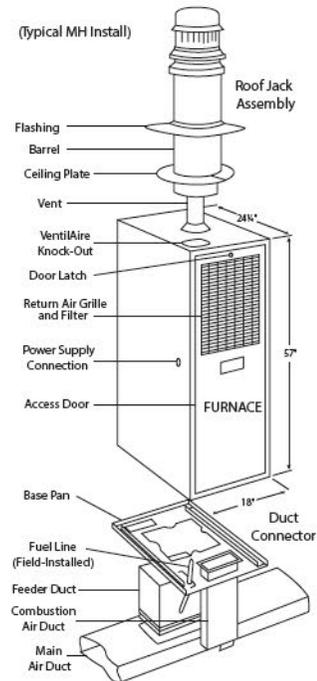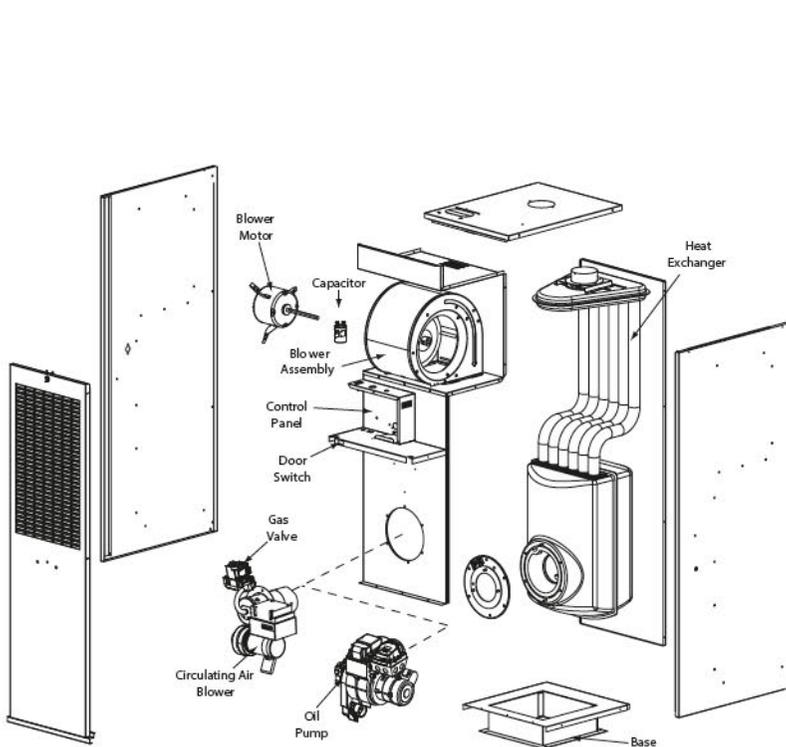


# A2L Retrofit Kits for Legacy MH Furnaces

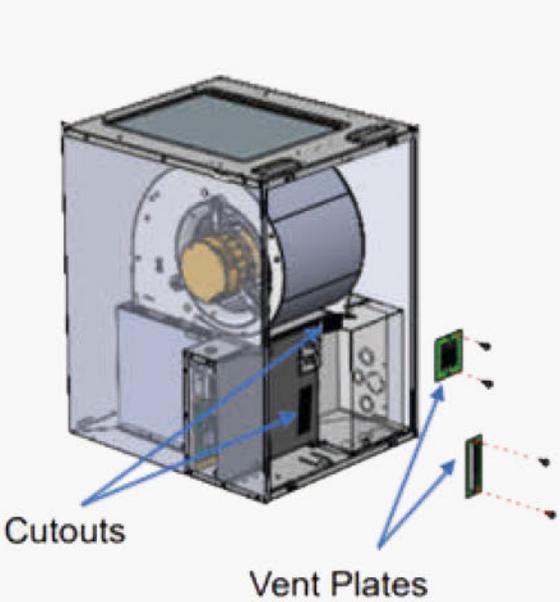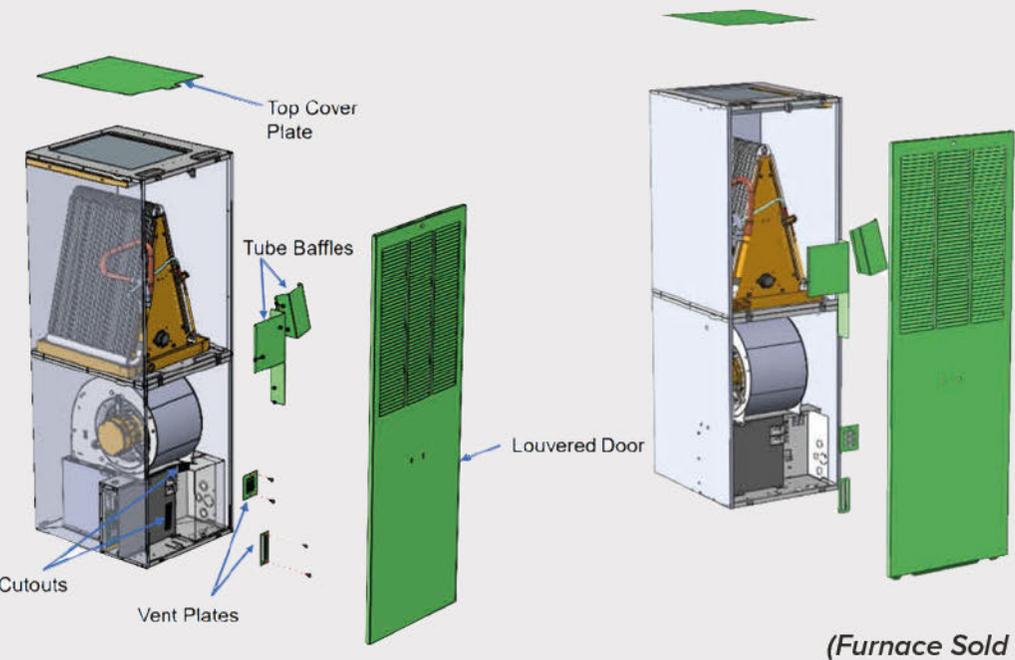Item #	Model
<p data-bbox="506 327 815 357">Retrofit Kit, E7EU/E7EM, No Doors, A2L</p>  <p data-bbox="138 946 267 989">Cutouts</p> <p data-bbox="381 1000 568 1038">Vent Plates</p> <p data-bbox="958 974 1307 1010"><i>(Furnace Sold Separately)</i></p>	<p data-bbox="1226 727 1299 755">1048978</p> <p data-bbox="1356 727 1429 755">E7U/E7M</p>
<p data-bbox="435 1153 885 1181">Retrofit Kit, E7ED, Downflow w/ Tall Coil Box-31.5"H, A2L</p>  <p data-bbox="397 1340 495 1383">Top Cover Plate</p> <p data-bbox="381 1478 495 1510">Tube Baffles</p> <p data-bbox="138 1819 211 1840">Cutouts</p> <p data-bbox="267 1840 381 1872">Vent Plates</p> <p data-bbox="641 1670 787 1702">Louvered Door</p> <p data-bbox="958 1872 1307 1908"><i>(Furnace Sold Separately)</i></p>	<p data-bbox="1226 1553 1299 1581">1049082</p> <p data-bbox="1372 1553 1412 1581">E7D</p>

Item #	Model
--------	-------


Retrofit Kit, MG2R, Front Return, Tall Coil Box-27"H, A2L

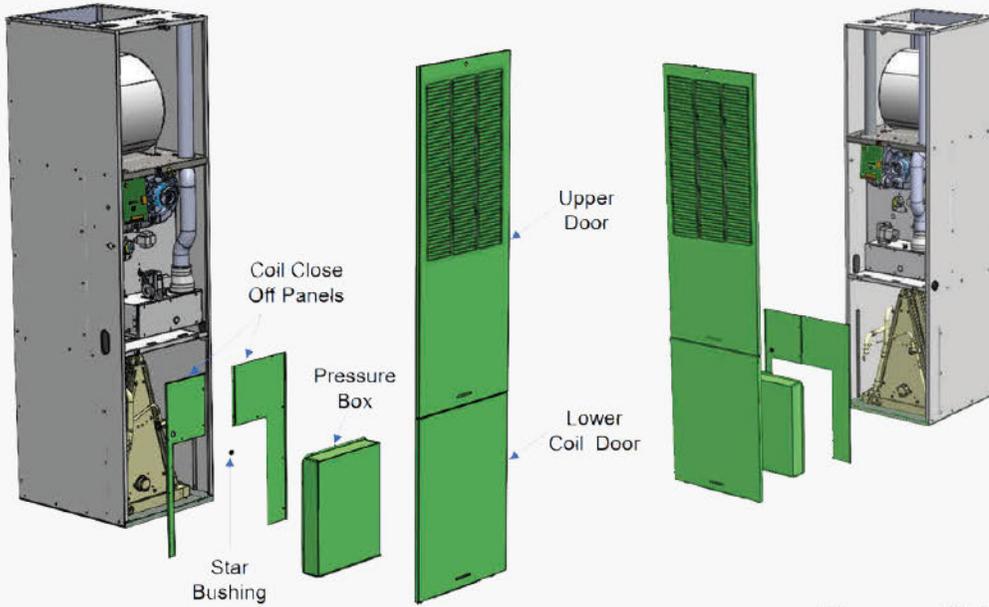

1048971	MG2R
---------	------

*(Furnace Sold Separately)*

Retrofit Kit, MG2R, Front Return, No Coil Box, A2L

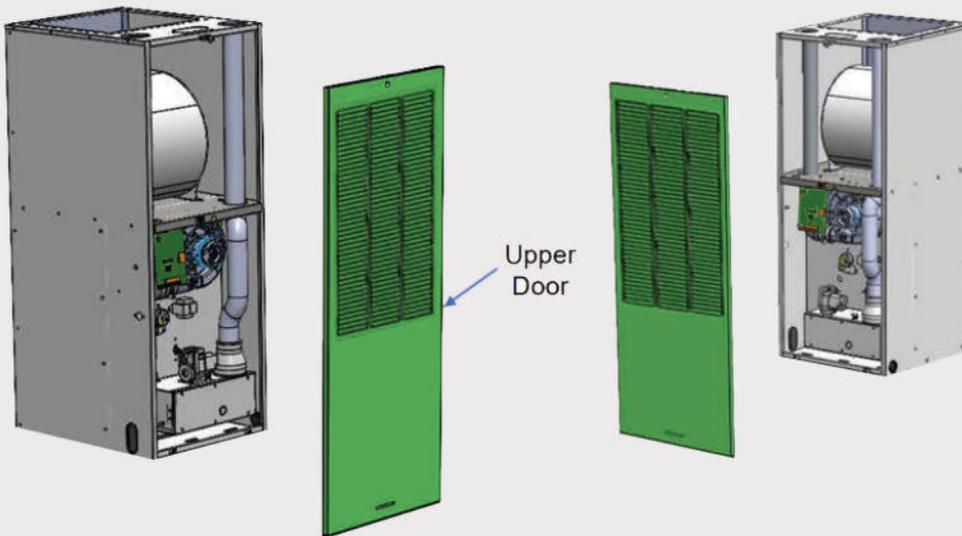


1048972	MG2R
---------	------

*(Furnace Sold Separately)*

Item #	Model
--------	-------

Retrofit Kit, MG2R/S, Front Return, Short Coil Box-20"H, A2L

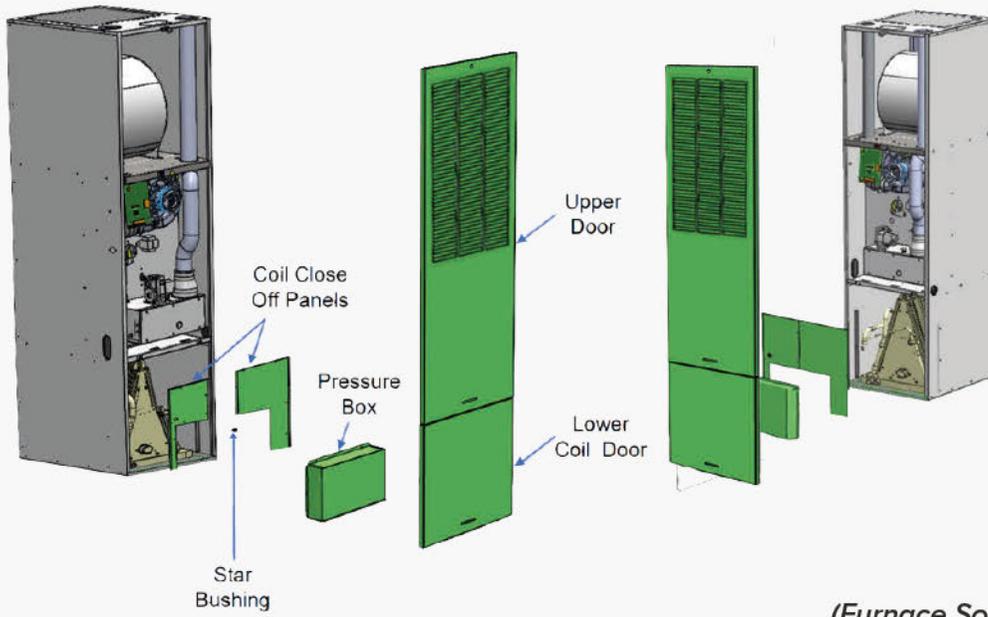


1048973

M62S

*(Furnace Sold Separately)*

Retrofit Kit, MG1E, Short Coil Box-20"H, A2L

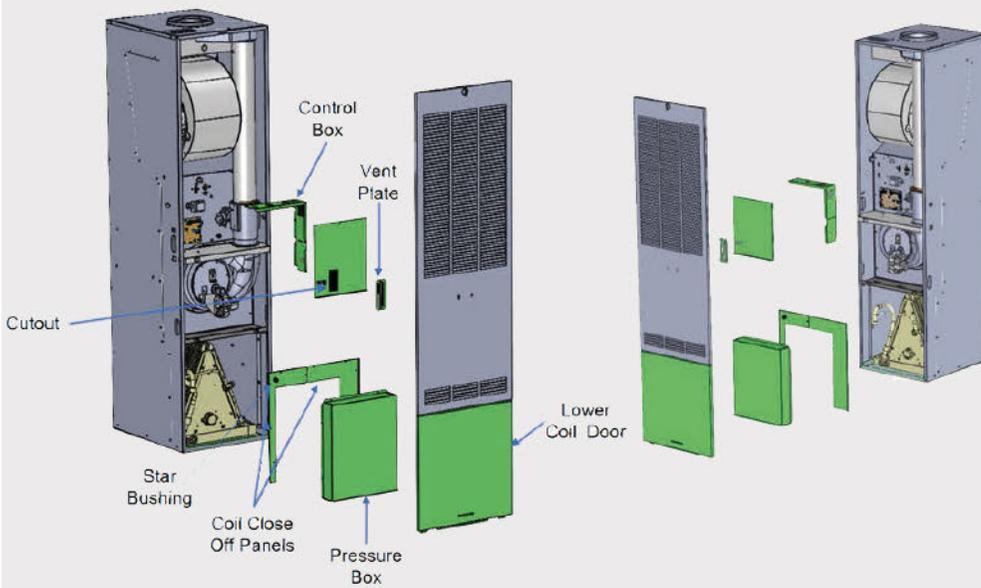


1048974

M61E

*(Furnace Sold Separately)*

Item #	Model
--------	-------


Retrofit Kit, MG1E, No Coil Box, A2L

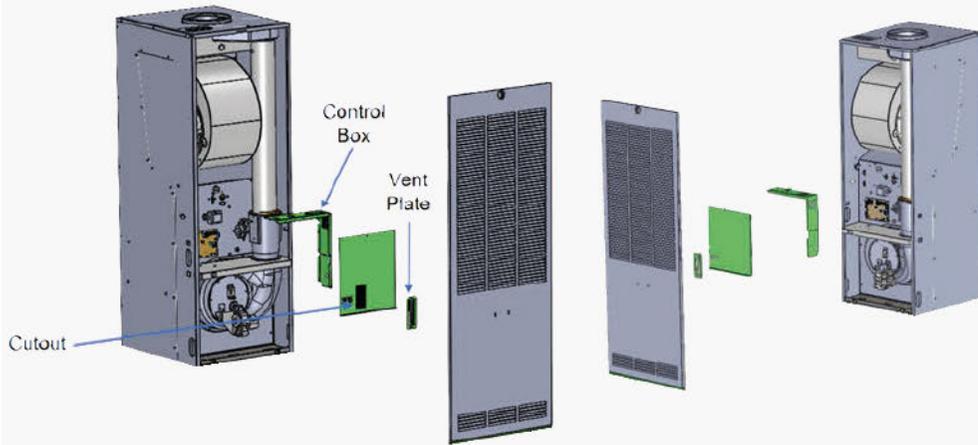

1048975 MG1E

*(Furnace Sold Separately)*

Retrofit Kit, M5SB, Short Coil Box-20"H, A2L

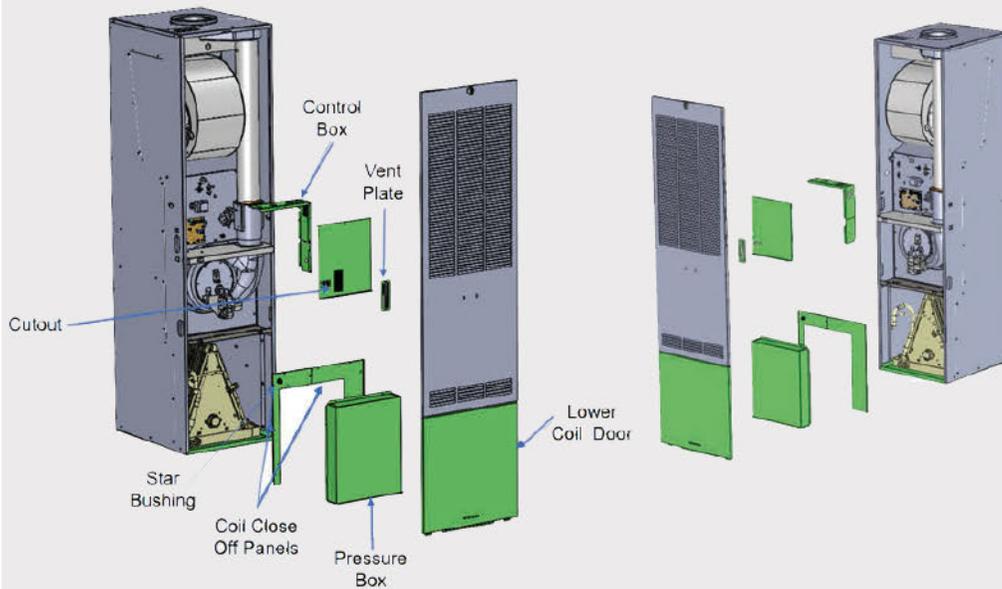


1048976 M5SB

*(Furnace Sold Separately)*

Item #	Model
--------	-------

Retrofit Kit, M5SB, No Coil Box, A2L

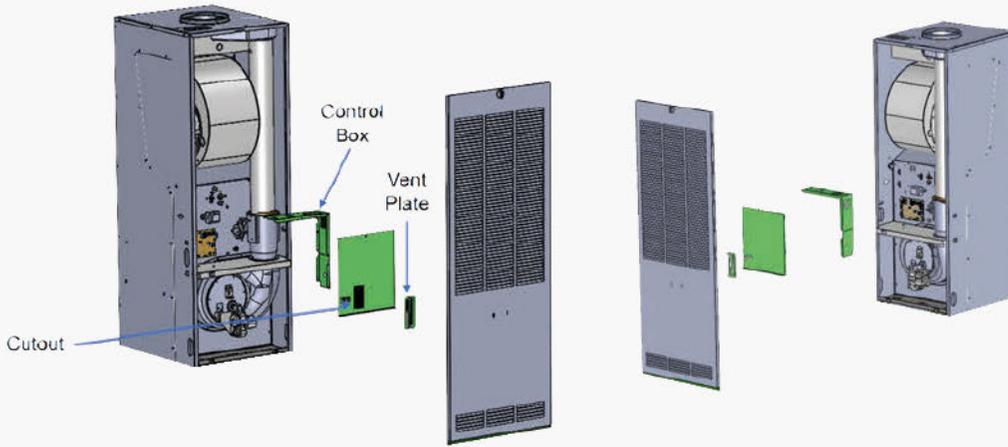


1048977

M5SB

*(Furnace Sold Separately)*

Retrofit Kit, MG2R/S, Top Return, Short Coil Box-20"H, A2L

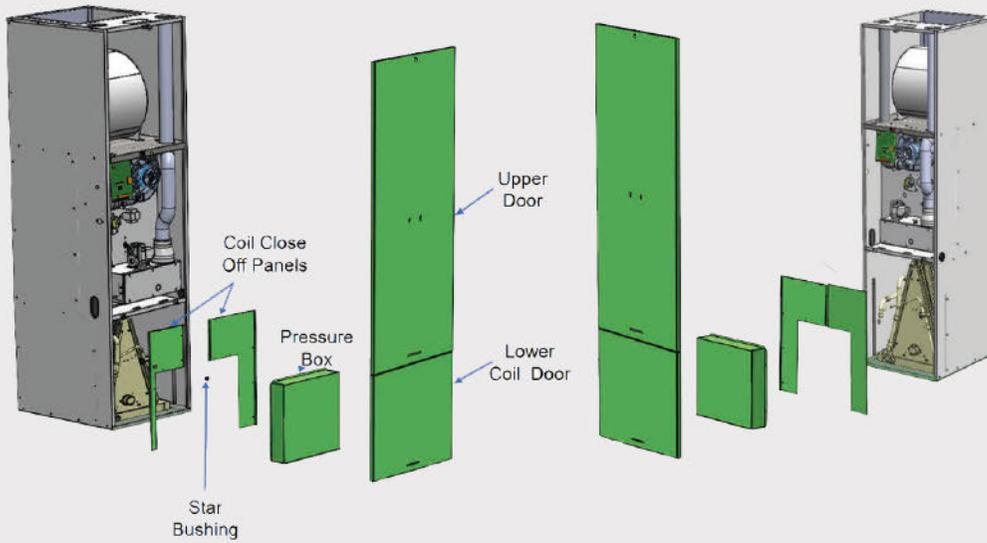


1049084

MG2S

*(Furnace Sold Separately)*


Retrofit Kit, MG2R, Top Return, No Coil Box, A2L

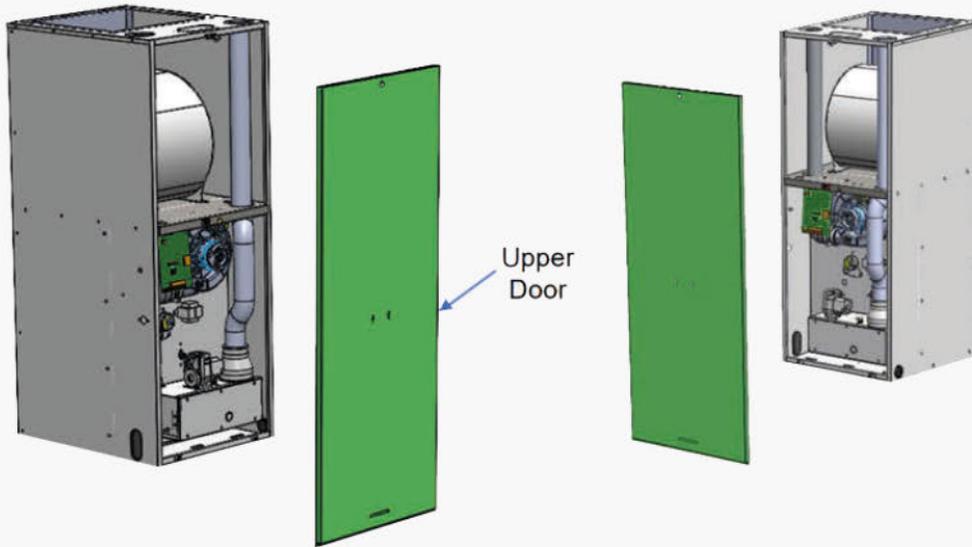

Item #	Model
1049085	MG2R

*(Furnace Sold Separately)*

Retrofit Kit, MG2R, Top Return, Tall Coil Box-27" H, A2L

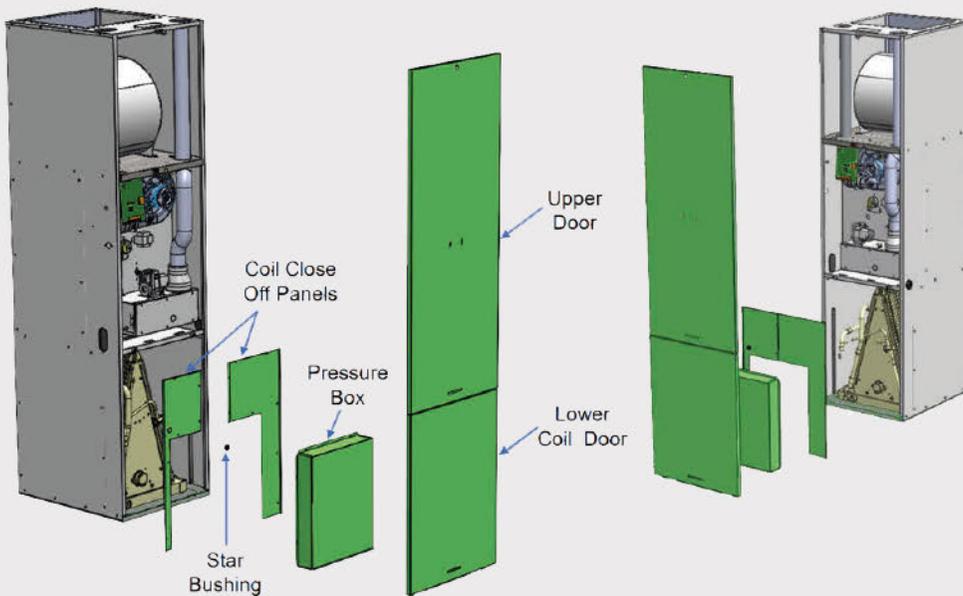

1049086	MG2R
---------	------

# R-454B North-AC Sweat Fit Split Condensers



## Simplified Refrigerant Detection System

Supplied with every indoor coil to comply with UL 60335-2-40, for equipment safety with new A2L refrigerants.

## Robust Post and Jacket Design

Independent louvered panels that are easily removed for service and maintenance, while protecting the coil from yard debris and extreme weather.

## Micro-Channel Coils

Minimize refrigerant charge and cost. Mounted on a rugged, composite drain pan with damage-preventing molded steps and drainage holes, with all capacities in a single competitive footprint.

## Resilient Corner-Post Packaging

Creates a gap around the entire unit, distributes the load evenly, and minimizes contact with the carton; so the unit arrives safely to your customer.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry, with additional benefits when registering a complete system.

### ACCESSORIES ALSO AVAILABLE




Item #	Model	Nominal Tons <sup>1</sup>	Item Dimensions	Package Weight	Min. Pad Size
			Packaging Dimensions		
101100092	HSA4MD5M1SN24K	2	23-3/4"D x 23-3/4"W x 28-1/2"H 27-1/2"D x 27-1/2"W x 30-3/4"H	131 lbs	24" X 24"
101100093	HSA4MD5M1SN30K	2.5	23-3/4"D x 23-3/4"W x 33"H 27-1/2"D x 27-1/2"W x 34-3/4"H	136 lbs	24" X 24"
101100094	HSA4MD5M1SN36K	3	23-3/4"D x 23-3/4"W x 37"H 27-1/2"D x 27-1/2"W x 38-3/4"H	147 lbs	24" X 24"
101100095	HSA4MD5M1SN42K	3.5	31-3/4"D x 31-3/4"W x 33"H 35-1/2"D x 35-1/2"W x 34-3/4"H	165 lbs	32" x 32"
101100096	HSA4MD5M1SN48K	4	31-3/4"D x 31-3/4"W x 37"H 35-1/2"D x 35-1/2"W x 38-3/4"H	206 lbs	32" x 32"

Item #	Model	Suction Line Connection	Liquid Line Connection	SEER2	EER2	Refrigerant Type	Refrigerant Charge	Cooling Output	MCA	MOP	Sound
101100092	HSA4MD5M1SN24K	3/4"	3/8"	13.4	11	R-454B	39 Oz	23 MBH	12	20	73
101100093	HSA4MD5M1SN30K	3/4"	3/8"	13.4	11	R-454B	49 Oz	29 MBH	16.4	25	77
101100094	HSA4MD5M1SN36K	3/4" <sup>2</sup>	3/8"	13.4	11	R-454B	55 Oz	34.8 MBH	19.4	30	74
101100095	HSA4MD5M1SN42K	7/8"	3/8"	13.4	11	R-454B	57 Oz	40 MBH	21.1	35	76
101100096	HSA4MD5M1SN48K	7/8"	3/8"	13.4	11	R-454B	68 Oz	45.5 MBH	25.6	40	78

1) Refer to AHRI listings for actual capacities and performance data.

2) Line set vapor line increases to 7/8" over 24 ft equivalent length.

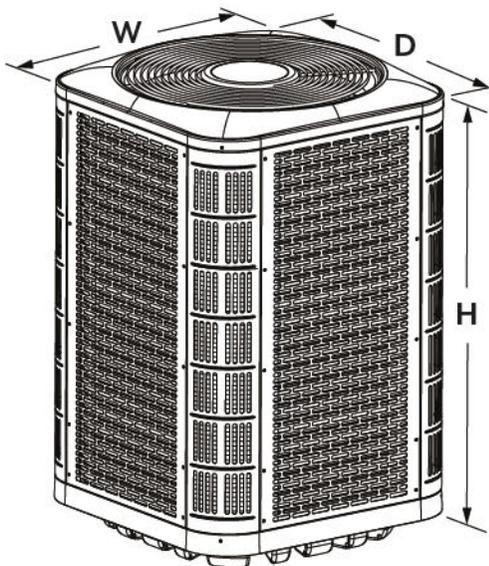

# R-454B South-AC Sweat Fit Split Condensers



## Simplified Refrigerant Detection System

Supplied with every indoor coil to comply with UL 60335-2-40, for equipment safety with new A2L refrigerants.

## Robust Post and Jacket Design

Independent louvered panels that are easily removed for service and maintenance, while protecting the coil from yard debris and extreme weather.

## Micro-Channel Coils

Minimize refrigerant charge and cost. Mounted on a rugged, composite drain pan with damage-preventing molded steps and drainage holes, with all capacities in a single competitive footprint.

## Compliant with All DOE Regions

So you can use the same split system condensers for a simplified stocking approach throughout your entire distribution and installation networks, uniquely designed and tested exclusively for HUD manufactured homes.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry, with additional benefits when registering a complete system.

### ACCESSORIES ALSO AVAILABLE




Item #	Model	Nominal Tons <sup>1</sup>	Item Dimensions		Package Weight	Min. Pad Size
			Packaging Dimensions			
101100097	HSA4ME5M1SN24K	2	31-3/4"D x 31-3/4"W x 29-1/4"H		155 lbs	32" x 32"
			35-1/2"D x 35-1/2"W x 30-3/4"H			
101100098	HSA4ME5M1SN30K	2.5	31-3/4"D x 31-3/4"W x 29-1/4"H		155 lbs	32" x 32"
			35-1/2"D x 35-1/2"W x 30-3/4"H			
101100099	HSA4ME5M1SN36K	3	31-3/4"D x 31-3/4"W x 37-1/4"H		168 lbs	32" x 32"
			35-1/2"D x 35-1/2"W x 38-3/4"H			
101100100	HSA4ME5M1SN42K	3.5	31-3/4"D x 31-3/4"W x 45-1/4"H		178 lbs	32" x 32"
			35-1/2"D x 35-1/2"W x 46-3/4"H			
101100101	HSA4ME5M1SN48K	4	31-3/4"D x 31-3/4"W x 45-1/4"H		200 lbs	32" x 32"
			35-1/2"D x 35-1/2"W x 46-3/4"H			
101100102	HSA4ME5M1SN60K	5	31-3/4"D x 31-3/4"W x 45-1/4"H		213 lbs	32" x 32"
			35-1/2"D x 35-1/2"W x 46-3/4"H			

Item #	Model	Suction Line Connection	Liquid Line Connection	SEER2	EER2	Refrigerant Type	Refrigerant Charge	Cooling Output	MCA	MOP	Sound
101100097	HSA4ME5M1SN24K	3/4"	3/8"	14.3	11.7	R-454B	53 Oz	23.4 MBH	12.1	20	72
101100098	HSA4ME5M1SN30K	3/4"	3/8"	14.3	11.7	R-454B	46 Oz	28.4 MBH	16.5	25	76
101100099	HSA4ME5M1SN36K	3/4"	3/8"	14.3	11.7	R-454B	66 Oz	35 MBH	18.9	30	73
101100100	HSA4ME5M1SN42K	7/8"	3/8"	14.3	11.7	R-454B	69 Oz	39.5 MBH	19.3	30	74
101100101	HSA4ME5M1SN48K	7/8"	3/8"	13.8	11.2	R-454B	77 Oz	45 MBH	25.6	40	78
101100102	HSA4ME5M1SN60K	7/8"	3/8"	13.8	11.2	R-454B	87 Oz	55.5 MBH	29.6	50	78

1) Refer to AHRI listings for actual capacities and performance data.

2) Line set diameter increases to 7/8" if equivalent length exceeds 39ft, requiring 7/8" to 3/4" reducer from line to unit.

3) Line set diameter increases to 1-1/8" if equivalent length exceeds 25ft, requiring 7/8" to 1-1/8" reducer from line to unit.

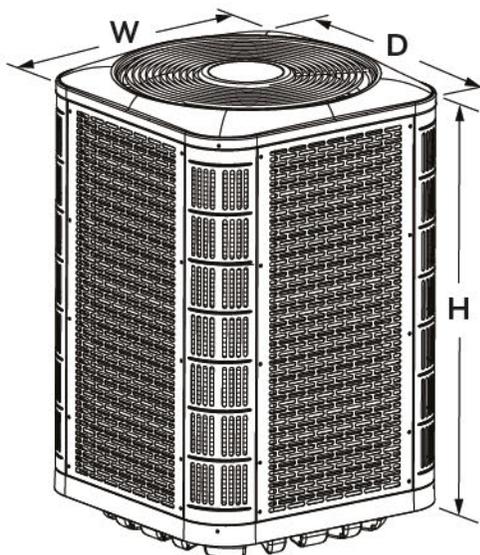

# R-454B Heat Pump Sweat Fit Split Condensers



## Simplified Refrigerant Detection System

Supplied with every indoor coil to comply with UL 60335-2-40, for equipment safety with new A2L refrigerants.

## Robust Post and Jacket Design

Independent louvered panels that are easily removed for service and maintenance, while protecting the coil from yard debris and extreme weather.

## Micro-Channel Coils

Minimize refrigerant charge and cost. Mounted on a rugged, composite drain pan with damage-preventing molded steps and drainage holes, with all capacities in a single competitive footprint.

## Resilient Corner-Post Packaging

Creates a gap around the entire unit, distributes the load evenly, and minimizes contact with the carton; so the unit arrives safely to your customer.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry, with additional benefits when registering a complete system.

### ACCESSORIES ALSO AVAILABLE




Item #	Model	Nominal Tons <sup>1</sup>	Item Dimensions	Package Weight	Min. Pad Size
			Packaging Dimensions		
101100103	HSH4ME5M1SP24K	2	31-3/4"D x 31-3/4"W x 33"H 35-1/2"D x 35-1/2"W x 35-3/4"H	173 lbs	32" x 32"
101100104	HSH4ME5M1SP30K	2.5	31-3/4"D x 31-3/4"W x 37"H 35-1/2"D x 35-1/2"W x 38-3/4"H	180 lbs	32" x 32"
101100105	HSH4ME5M1SP36K	3	31-3/4"D x 31-3/4"W x 45"H 35-1/2"D x 35-1/2"W x 46-3/4"H	196 lbs	32" x 32"
101100106	HSH4ME5M1SP42K	3.5	31-3/4"D x 31-3/4"W x 45"H 35-1/2"D x 35-1/2"W x 46-3/4"H	207 lbs	32" x 32"
101100107	HSH4ME5M1SP48K	4	31-3/4"D x 31-3/4"W x 45"H 35-1/2"D x 35-1/2"W x 46-3/4"H	225 lbs	32" x 32"

Item #	Model	Suction Line Connection	Liquid Line Connection	SEER2	EER2	HSPF2	Refrigerant Type	Refrigerant Charge	Cooling Output	MCA	MOP	Sound
101100103	HSH4ME5M1SP24K	3/4"	3/8"	14.3	11.8	7.5	R-454B	76 Oz	23.4 MBH	12.1	20	71/71
101100104	HSH4ME5M1SP30K	3/4"	3/8"	14.3	11.8	7.5	R-454B	85 Oz	30 MBH	16.5	25	73/72
101100105	HSH4ME5M1SP36K	3/4" <sup>2</sup>	3/8"	14.3	11.8	7.5	R-454B	90 Oz	34 MBH	19	30	71/69
101100106	HSH4ME5M1SP42K	3/4"	3/8"	14.3	11.8	7.5	R-454B	103 Oz	39 MBH	19.3	30	76/75
101100107	HSH4ME5M1SP48K	7/8"	3/8"	14.3	11.8	7.5	R-454B	107 Oz	44.5 MBH	25.6	40	77/76


1) Refer to AHRI listings for actual capacities and performance data.

2) Line set vapor line increases to 7/8" over 39 ft equivalent length.

3) REQUIRES an E7\* furnace model.

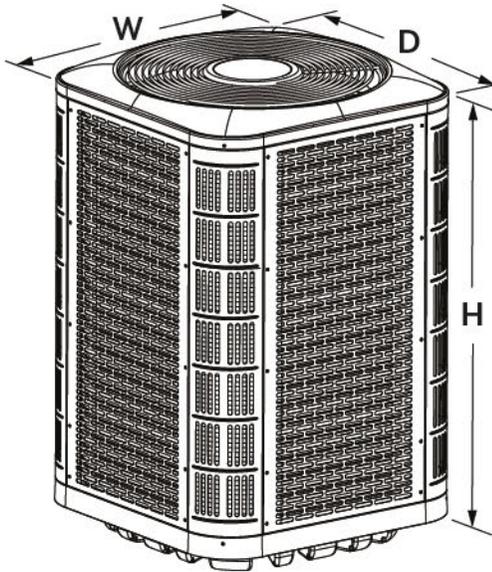

# R-454B Sweat Fit Micro-Channel Indoor Coils

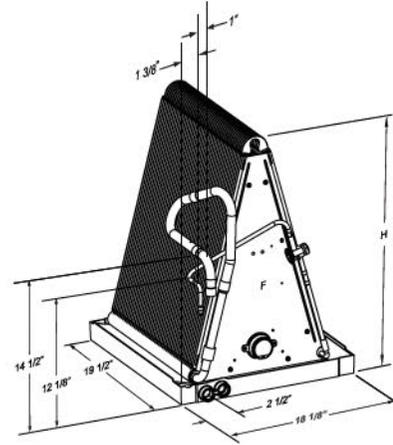

Item #	Model	Nominal Tons <sup>1</sup>	Item Dimensions		Package Weight	Min. Coil Box Height
			Packaging Dimensions			
101100108	C85DAMX24U-B	2	19-1/2"D x 18-1/8"W x 18"H	25-3/8"D x 20"W x 22-3/16"H	19.7 lbs	18"
101100109	C85DAMX3036U-B	2.5	19-1/2"D x 18-1/8"W x 18"H	25-3/8"D x 20"W x 22-3/16"H	19.7 lbs	18"
101100110	C85DAMX42U-B	3.5-AC	19-1/2"D x 18-1/8"W x 18"H	25-3/8"D x 20"W x 22-3/16"H	19.7 lbs	18"
101100111	C85DAMX43U-B	3.5-HP	19-1/2"D x 18-1/8"W x 25"H	25-7/32"D x 20-7/32"W x 28-3/16"H	23.3 lbs	26"
101100112	C85DAMX48U-B	4-AC	19-1/2"D x 18-1/8"W x 25"H	25-7/32"D x 20-7/32"W x 28-3/16"H	23.3 lbs	26"
101100113	C85DAMX4960U-B	4-HP	19-1/2"D x 18-1/8"W x 29"H	25-1/2"D x 23"W x 32"H	33 lbs	31"

Item #	Model	Suction Line Connection	Liquid Line Connection	Refrigerant Type	Refrigerant Charge
101100108	C85DAMX24U-B	3/4"	3/8"	R-454B	N-18psi
101100109	C85DAMX3036U-B	3/4"	3/8"	R-454B	N-18psi
101100110	C85DAMX42U-B	3/4"	3/8"	R-454B	N-18psi
101100111	C85DAMX43U-B	3/4"	3/8"	R-454B	N-18psi
101100112	C85DAMX48U-B	3/4"	3/8"	R-454B	N-18psi
101100113	C85DAMX4960U-B	3/4"	3/8"	R-454B	N-18psi

<sup>1</sup>) These are nominal values. Consult the AHRI Certified Products Directory for actual performance and required airflow.



Coil Kit

## Complete Systems for Mobile Homes

Revolv matched systems are designed to work together seamlessly. A matched system delivers superior performance and increased warranty coverage for the homeowner, while reducing guesswork, challenging retrofits, and liability for the contractor. And the entire system is from Revolv—a trusted and proven brand focused exclusively on manufactured housing.



### Furnaces

- Designed to be a drop-in fit for manufactured homes
- Appliance-quality construction and finish
- Constant torque, ECM blower provides peak performance
- Convenient NG-to-LP conversion
- Extended 5-year parts warranty with a matched system



### Apex Micro-Channel Coil Technology

- All-aluminum micro-channel coil technology
- Use less refrigerant
- Factory-mounted A2L sensor and control
- Easier installation and service



### Condensers

- Durable stainless steel jackets provide modern look and more protection than a wire guard
- State-of-the-art scroll compressors
- 5-year parts warranty when paired with a rated coil

# R-454B Self-Contained Packaged Air Conditioner



## 2023 DOE-Compliant A2L Models

Meet the latest performance minimums for ALL DOE AC regions and comply with UL 60335-2-40 equipment safety and testing standard for A2L refrigerants.

## Aluminum Micro-Channel Coils

Designed to optimize heat transfer, minimize footprint, decrease materials cost, reduce refrigerant volume, and resist formicary corrosion to promote longer service-life.

## Convenient Service Access

Access to all control components, compressor, evaporator coil, and indoor blower; with perimeter high and low-side refrigerant ports.

## Advanced Refrigeration Technology

Including a factory-installed, liquid line filter-drier.

## High-Static Blower

Utilizes a high-efficiency, 5-speed, fixed-torque, brushless-DC ECM for quieter operation.

## Optional Electric Heater Kits

Available for field-installation in Air Conditioners or Heat Pumps, ranging from 5-15 kW output.

## Competitive, Compact Footprints

Will fit some of the most aggressive lot lines, and allow for easier transportation and installation.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.

### ACCESSORIES ALSO AVAILABLE








Item #	Model	AHRI Cert. #	Nominal Tons <sup>1</sup>	Item Dimensions	Package Weight	Min. Pad Size
				Packaging Dimensions		
101100080	P95RD-024K	215817616	2	35"D x 49"W x 22- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 23"H	212 lbs	49" x 35"
101100081	P95RD-030K	215817617	2.5	35"D x 49"W x 22- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 23"H	237 lbs	49" x 35"
101100082	P95RD-036K	215817618	3	35"D x 49"W x 22- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 23"H	243 lbs	49" x 35"
101100083	P95RD-042K	215817619	3.5	35"D x 49"W x 30- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 31"H	296 lbs	49" x 35"
101100084	P95RD-048K	215817620	4	35"D x 49"W x 30- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 31"H	298 lbs	49" x 35"
101100085	P95RD-060K	215817621	5	35"D x 63"W x 38- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 65"W x 39"H	353 lbs	63 x 35

Item #	Model	Refrigerant Type	Refrigerant Charge	MCA	MOP	Sound
101100080	P95RD-024K	R-454B	37 Oz	16.0	20	75
101100081	P95RD-030K	R-454B	38.4 Oz	20.5	30	77
101100082	P95RD-036K	R-454B	34 Oz	25.7	40	76
101100083	P95RD-042K	R-454B	44.6 Oz	28.5	45	76
101100084	P95RD-048K	R-454B	46.7 Oz	36.5	50	77
101100085	P95RD-060K	R-454B	69 Oz	38.1	60	76

1) Refer to AHRI listings for actual capacities and performance data.

2) Electrical data for unit-only, which would not include the addition of any field-installed electric heater.

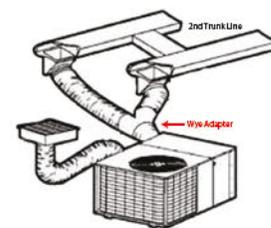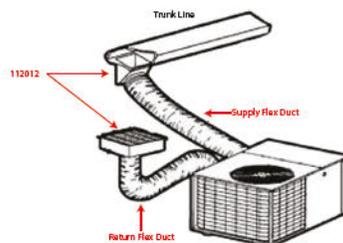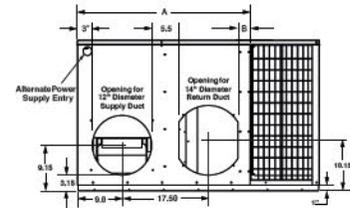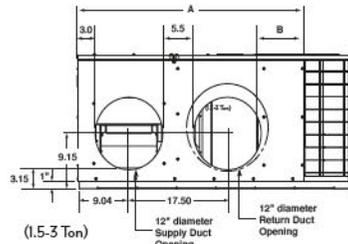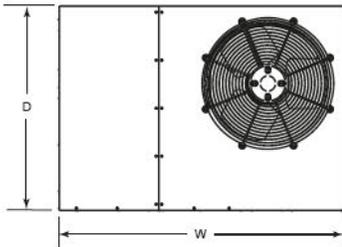

# R-454B Self-Contained Packaged Heat Pump



## 2023 DOE-Compliant A2L Models

Meet the latest HUD and performance requirements, as well as complying with UL 60335-2-40 equipment safety and testing standard for A2L refrigerants.

## Aluminum Micro-Channel Coils

Designed to optimize heat transfer, minimize footprint, decrease materials cost, reduce refrigerant volume, and resist formicary corrosion to promote longer service life.

## Advanced Refrigeration Technology

Including a factory-installed, Bi-flow, liquid line filter-drier, patented hot gas defrost, and a factory-supplied Bi-metallic Outdoor Thermostat.

## Convenient Service Access

Access to all control components, compressor, evaporator coil, and indoor blower; with perimeter high and low-side refrigerant ports.

## High-Static Blower

Utilizes a high-efficiency, 5-speed, fixed-torque, brushless-DC ECM.

## Optional Electric Heater Kits

Available for field-installation in Air Conditioners or Heat Pumps, ranging from 5-15 kW output.

## Competitive, Compact Footprints

Will fit some of the most aggressive lot lines, and allow for easier transportation and installation.

## Dependable Warranty and Support

Handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing industry.

### ACCESSORIES ALSO AVAILABLE







Item #	Model	AHRI Cert. #	Nominal Tons <sup>1</sup>	Item Dimensions	Package Weight	Min. Pad Size
				Packaging Dimensions		
101100086	Q95RD-024K	216031813	2	35"D x 49"W x 30- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 31"H	280 lbs	49" x 35"
101100087	Q95RD-030K	216031814	2.5	35"D x 49"W x 30- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 31"H	281 lbs	49" x 35"
101100088	Q95RD-036K	216031815	3	35"D x 49"W x 30- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 51"W x 31"H	300 lbs	49" x 35"
101100089	Q95RD-042K	216031816	3.5	35"D x 63"W x 38- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 65"W x 39"H	348 lbs	63" x 35"
101100090	Q95RD-048K	216031817	4	35"D x 63"W x 38- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 65"W x 39"H	370 lbs	63" x 35"
101100091	Q95RD-060K	216031818	5	35"D x 63"W x 38- <sup>13</sup> / <sub>64</sub> "H 37- <sup>1</sup> / <sub>2</sub> "D x 65"W x 39"H	382 lbs	63" x 35"

Item #	Model	Refrigerant Type	Refrigerant Charge	MCA Single	MOP Single	Sound
101100086	Q95RD-024K	R-454B	61.8 Oz	16.1	25	76/77
101100087	Q95RD-030K	R-454B	64 Oz	20.5	30	74/76
101100088	Q95RD-036K	R-454B	62.4 Oz	23.7	35	77/77
101100089	Q95RD-042K	R-454B	67.2 Oz	29.4	45	77/79
101100090	Q95RD-048K	R-454B	92 Oz	31.0	50	75/76
101100091	Q95RD-060K	R-454B	92 Oz	39.0	60	75/77

1) Refer to AHRI listings for actual capacities and performance data.

2) Electrical data for unit-only, which does not include the addition of a field-installed electric heater.

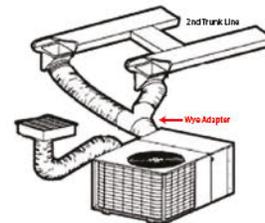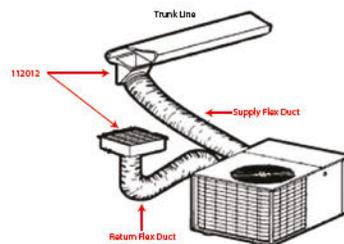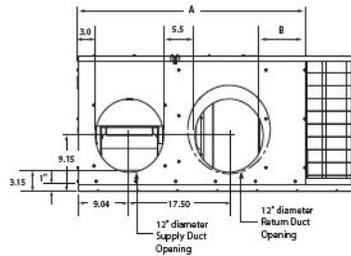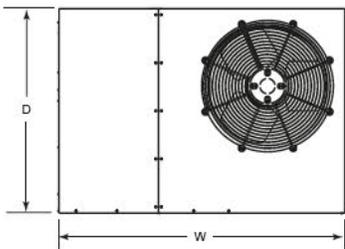

## Adapter Kit



Item #
<b>903456</b> Combustion Air Inlet Adapter Kit. Each. USED WITH: CMF3, CMF2

This item is available as drop-ship only (not stocked), where a non-cancellable order minimum and longer lead-time may apply.

## Backflow Dampers



Item #
<b>901083</b> 1-Blade Cooling Backflow Damper for Empty Coil Box in Combustion Furnaces. Each. USED WITH: MG2R, MG2S, MG1E, M5SB - with a coil box AND Packaged Unit



Item #
<b>902095</b> 3-Blade Low Profile Cooling Backflow Damper for Combustion Furnaces. Each. USED WITH: CMF3, CMF2, MG2R, MG2S, MG1E, M5SB and Packaged Unit

## Blower Upgrade Kits



Item #
<b>1044062</b> E7, High-Static, Blower, M1, 4THP+. Each. USED WITH: E7ED, E7EM, E7EU

## Ceiling Rings



Item #
<b>902521</b> Adjustable, Ceiling, Trim Ring, Halves for Rough, Roof Jack Opening. Each. USED WITH: MG1E, M5SB

## Circuit Adapter



Item #
<b>1039295</b> 4-Pole, Single Circuit Adapter (less than 3 breakers). Each. USED WITH: P95, Q95, E7

## Circuit Breaker



Item #
<b>913554</b> 1-Phase, 2-Pole, Circuit Breaker, 60 A. Each. USED WITH: P95, Q95

## Coil Boxes



Item #
<b>101200002</b> Coil Box, 20"H, Field-Installed, Central Air Each. USED WITH: MG2R, MG1E, M5SB



Item #
<b>101200000</b> Downflow Coil Box with Louvered Door, 31-1/2"H (Front Return). Each. USED WITH: E7EM



Item #
<b>101200001</b> Upflow Coil Box with Solid Door, 31-1/2"H. Each. USED WITH: E7EM



Item #
<b>101200003</b> Coil Box, 26"H, Field-Installed, Central Air Each. USED WITH: MG2R, MG1E, M5SB

## Concentric Vent Kits



Item #
<b>904952</b> 2"Ø Concentric Vent Pipe Termination Kit, US/CA. Each. USED WITH: MG2R, MG3P

Item #
<b>904953</b> 3"Ø Concentric Vent Pipe Termination Kit, US/CA. Each. USED WITH: MG2R, MG2S, MG3P

## Condensate Drain Trap



Item #
<b>5015411</b> 3/4" Slip x 3/4" Slip, White, PVC, Condensate Drain, P-Trap. Each.

## Condensate Safety Switch



Item #
<b>CS-2</b> Pipe-Mounted, Condensate, Overflow, Safety Switch. Each. USED WITH: C85

## Conduit - Liquid Tight



Item #
<b>598040</b> 1/2" x 100' Liquid Tight Conduit. Roll.
<b>598041</b> 3/4" x 100' Liquid Tight Conduit. Roll.

## Conduit Assemblies



Item #
<b>598071</b> 1/2" x 4', #10 Wire-Whip Conduit Kit HVAC equipment power connections. Each.
<b>598073</b> 1/2" x 6', #10 Wire-Whip Conduit Kit HVAC equipment power connections. Each.
<b>598077</b> 3/4" x 6', #8 Wire-Whip Conduit Kit HVAC equipment power connections. Each.
<b>598079</b> 3/4" x 6', #6 Wire-Whip Conduit Kit HVAC equipment power connections. Each.

## Conversion Kit



Item #
<b>903100</b> Conversion Kit, 65MBH Input, CMF2-0il. Each. USED WITH: CMF2
<b>903102</b> Conversion Kit, 90MBH Input, CMF2-0il. Each. USED WITH: CMF2

## Cottage Base



Item #
<b>901696</b> CB-200A Cottage Base. Each. USED WITH: CMF3, CMF2

This item is available as drop-ship only (not stocked), where a non-cancellable order minimum and longer lead-time may apply.

## Digimotor Diagnostic Tool



Item #
<b>921767</b> E7, Broad Ocean, ECM, Digimotor, Diagnostic Tool. Each. USED WITH: E7ED, E7EM, E7EU

This item is available as drop-ship only (not stocked), where a non-cancellable order minimum and longer lead-time may apply.

## Draft Cap



Item #
<b>522086</b> Draft Cap for 4" Single Pipe Flue or Exhaust Fan. Each.

## Duct Collar with Tabs



Item #
<b>110010</b> 10" Collar with Tabs. Each.
<b>110120</b> 12" Collar with Tabs. Each.
<b>110140</b> 14" Collar with Tabs. Each.

## Duct Collars




Item #
<b>294941</b> 12"Ø, Metal, Duct Collar. Each. USED WITH: Flex Duct, P95, Q95



Item #
<b>294942</b> 14"Ø Duct Collar. Each. USED WITH: Flex Duct, P95, Q95

## Duct Connectors



Item #
<b>901988A</b> 11-1/4" x 13-1/2" x 2"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB
<b>901987A</b> 11-1/4" x 13-1/2" x 7/8"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB

## Duct Connectors



Item #
<b>901989A</b> 11-1/4" x 13-1/2" x 4-1/4"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB
<b>901990A</b> 11-1/4" x 13-1/2" x 6-1/4"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB
<b>901991A</b> 11-1/4" x 13-1/2" x 8-1/4"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB
<b>901992A</b> 11-1/4" x 13-1/2" x 10-1/4"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB
<b>901993A</b> 11-1/4" x 13-1/2" x 12-1/4"H Duct Connector. Each. USED WITH: E7, MG1E, MG2R, MG2S, M5SB
<b>902990</b> E7/RE9, Upflow Furnace, Duct, Connector. Each. USED WITH: E7EM, E7EU



## Duct Transition



Item #
<b>1112108</b> 12"Ø to 10"Ø Round Duct Transition Reducer/Incraser. Each. USED WITH: P95, Q95
<b>1114128</b> 14"Ø to 12"Ø Round Duct Transition Reducer/Incraser. Each. USED WITH: P95, Q95

## Electrical Box Connectors



Item #
<b>598042</b> 1/2" Straight Electrical Box Connector. Each.
<b>598043</b> 3/4" Straight Electrical Box Connector. Each.
<b>598045</b> 1/2", Electrical Box, 90°, Elbow Connector. Each.
<b>598046</b> 3/4", Electrical Box, 90°, Elbow Connector. Each.

## Electrical Disconnect Box



Item #
<b>598064</b> Electrical Disconnect Box, Non-fused, 60 Amp. Each.

## Equipment Pads



Item #
<b>1124242D</b> 24" x 24" x 2", UV Plastic, Equipment Pad. Each.
<b>1124243D</b> 24" x 24" x 3", UV Plastic, Equipment Pad. Each.
<b>1133333D</b> 33" x 33" x 3", UV Plastic, Equipment Pad. Each.
<b>1136363D</b> 36" x 36" x 3", UV Plastic, Equipment Pad. Each.
<b>1136483D</b> 36" x 48" x 3", UV Plastic, Equipment Pad. Each.
<b>1145583D</b> 45" x 58" x 3", 33lb, UV Plastic, Equipment Pad. Each.
<b>H3652-4</b> 36" x 52" x 4", 140lb, Concrete, Hurricane-150MPH, Equipment Pad. Each.
<b>H3865-4</b> 38" x 65" x 4", 170lb, Concrete, Hurricane-150MPH, Equipment Pad. Each.

## Equipment Riser



Item #
<b>110006</b> 6" Pad-mount Heat Pump Riser. (4+ required per unit) Each. USED WITH: HSH4, Q95

## Fan Delay Kit



Item #
<b>6918.5011</b> 18s, Fan, Time-Delay, Relay (TDR) Kit. Each.

## Filters



Item #
<b>110611</b> 16" x 20", Spun Plastic, Trimmable, Washable, Filter. Each.



<b>1122515</b> 20" x 16" x 1" Disposable Spun Fiberglass Filter. Each.
--

<b>1122517</b> 20" x 20" x 1" Disposable Spun Fiberglass Filter. Each. USED WITH: 1014501
--



<b>1196935689</b> 19" x 16" Permanent Metal Mesh Washable Filter. 2-Piece Pair. Each.
--



<b>669064R</b> 19-1/2" x 28" x 1/2", Washable, Hogs Hair, Return Air, Furnace Filter. Each. USED WITH: MG1E, M5SB, 669065R
--

<b>669363R</b> 20" x 22" x 1/2", Washable, Hogs Hair, Return Air, Furnace Filter. Each. USED WITH: MG2R, MG2S, 669065R
--



<b>669065R</b> M1/M5 Furnace, Filter, Retainer Wire. Each. USED WITH: MG1E, M5SB, MG2R, MG2S, 669064R, 669363R
--



<b>1007623R</b> 18" x 30" x 1" Disposable Spun Fiberglass Return Air Filter. Each. USED WITH: E7ED, 1012000000
--

<b>668860R</b> 18" x 20" x 1", Disposable, Spun Fiberglass, Return Air, Furnace Filter. Each. USED WITH: E7EM, E7ED, 1014501
--

## Flashing



Item #
<b>601050</b> 10" x 50', Aluminum, Flashing. Each (6/Box).

<b>6010501</b> 10" x 50' Galvanized Steel Flashing. Each. Each (6/Box).
---

<b>60850</b> 8" x 50', Aluminum, Flashing. Each.
--

## Flex Duct



Item #
<b>1101025</b> 10" x 25', R4.2, Flex Duct. Each.

<b>1101225</b> 12" x 25', R4.2, Flex Duct. Each.
--

<b>1101425</b> 14" x 25', R4.2, Flex Duct. Each.
--

<b>1181225</b> 12" x 25', R8, Flex Duct. Each.
--

<b>1181425</b> 14" x 25', R8, Flex Duct. Each.
--

## Metal Registers




Item #
<b>11CL410B</b> 4" x 10", Brown, Metal, Register. Each.



<b>11CL410W</b> 4" x 10", White, Metal, Register. Each.
---



<b>11CL412B</b> 4" x 12", Brown, Metal, Register. Each.
---



<b>11CL412W</b> 4" x 12", White, Metal, Register. Each.
---



<b>11CL48B</b> 4" x 8", Brown, Metal, Register. Each.
---



<b>11CL48W</b> 4" x 8", White, Metal, Register. Each.
---

## Plastic Registers



Item #
<b>1178401</b> 4" x 10", White, Plastic, Register. Each.



<b>1178407</b> 4" x 10", Brown, Plastic, Register. Each.
--



<b>1178481</b> 4" x 8", White, Plastic, Register. Each.
---



<b>1178487</b> 4" x 8", Brown, Plastic, Register. Each.
---

## Plastic Drawbands



Item #
<b>110225</b> 36", White, Plastic, Drawbands. Each.

<b>110248</b> 48", White, Plastic, Drawbands. Each.
---

## Metal Wyes



Item #
<b>11121010</b> 12"Ø x 2-10"Ø Metal Wye Adapters. Each. USED WITH: Flex Duct, P95, Q95

<b>11121212</b> 12"Ø x 2-12"Ø Metal Wye Adapters. Each. USED WITH: P95, Q95 - Multi-section Applications
---

<b>111412</b> 14"Ø x 2-12"Ø Metal Wye Adapters. Each. USED WITH: P95, Q95 - Multi-section Applications
---

<b>11141414</b> 14"Ø x 2-14"Ø Metal Wye Adapters. Each. USED WITH: P95, Q95 - Multi-section Applications
---

## Mild Weather Kit



Item #
<b>921956</b> Mild Weather Kit for Heat Pumps Operating in Warmer Outdoor Temperatures. Each. USED WITH: HSH4

## NE Safety Kit

Item #
<b>901855</b> New England Safety Kit (Required in MA). Each. USED WITH: CMF2

## Packaged Unit Electric Heater Kits



Item #
<b>W3P0502</b> 5kW, 240V/1/60, Resistance, Electric Heater Kit without Breakers for Carrier Packaged Units. Each. USED WITH: P95, Q95

<b>W3P0802</b> 8kW, 240V/1/60, Resistance, Electric Heater Kit without Breakers for Revolv Packaged Units. Each. USED WITH: P95, Q95
---

<b>W3P1002</b> 10kW, 240V/1/60, Resistance, Electric Heater Kit without Breakers for Revolv Packaged Units. (DISCONTINUED) Each. USED WITH: P95, Q95
---

<b>W3P1502</b> 15kW, 240V/1/60, Resistance, Electric Heater Kit without Breakers for Revolv Packaged Units. Each. USED WITH: P95, Q95
--

<b>W3P1502B</b> 15kW, 240V/1/60, Resistance, Electric Heater Kit with Breakers (Drop-ship Only) for Revolv Packaged Units. Each. USED WITH: P95, Q95
---

<b>W3P2002B</b> 15kW, 240V/1/60, Resistance, Electric Heater Kit with Breakers (Drop-ship Only) for Revolv Packaged Units. Each. USED WITH: P95, Q95
---

## Register Collars



Item #
<b>114106</b> 10"W x 4"L x 6"D Register Supply Collar. Each.

<b>11486</b> 8"W x 4"L x 6"D Register Supply Collar. Each.
--

## Return Air Boxes



Item #
<b>111220BRN</b> Grille-Only for Return Air Box w/ 115012 or 115014. Each. USED WITH: P95, Q95

<b>115012</b> 12" Ø Return Air Box with Grille and Filter. Each. USED WITH: Flex Duct, P95, Q95
--

<b>115014</b> 14" Ø Return Air Box with Grille and Filter. Each. USED WITH: Flex Duct, P95, Q95
--

## Roof Jack Crown



Item #
<b>104781000</b> Roof Jack, Replacement, Crown Assembly. Each. USED WITH: CMF3, CMF2
<b>903656</b> Roof Jack, Crown-Only (Post-Transit). Each. USED WITH: MG1E, M5SB

## Roof Jack Extension Assembly



Item #
<b>104360001</b> SRJ Extension Assembly, 4"x18". Each. USED WITH: CMF3, CMF2

## Roof Jack Extensions



Item #
<b>901935</b> Roof Jack Extension, 10"H, Internal. Each. USED WITH: MG1E, M5SB
<b>901937</b> Roof Jack Extension, 16"H, External. Each. USED WITH: MG1E, M5SB
<b>903107</b> Roof Jack Extension, 18"H, Internal. Each. USED WITH: MG1E, M5SB

## Cloth Duct Tape



Item #
<b>602603</b> 2"W x 180'L, Silver, Cloth, Duct, Tape. Each (24/Carton).
<b>602857B</b> 2"W x 180'L, UL181B-FX, Black, Cloth, 557, Duct Tape. Each (24/Carton).
<b>602609</b> 2"W x 180'L, Black, Cloth, Duct Tape. Each (24/Carton).

## Coated Fabric Tape



Item #
<b>602825</b> 28"W x 25'L, FLEX-MEND, Polyethylene Film, Tape Roll with Solid-coated Adhesive and Paper Backer, for Any Size Patch. Each (20/Carton).
<b>60600</b> 6"W x 180'L, FLEX-MEND, Polyethylene Film, Tape Roll with Solid-coated Adhesive and Paper Backer. Intended to Repair Long Slits Around AC or Water Lines. Each (12/Carton).

## Foil Tape



Item #
<b>602509</b> 2"W x 150'L, Aluminum Foil Tape with Liner. Each (24/Carton).

## Woven Strap



Item #
<b>6014932</b> Woven Polypropylene Fabric Strap, 1-3/4" x 300'. Each. USED WITH: Flex Duct, P95, Q95

## Galvanized Pipe Hanger Strap



Item #
<b>116507</b> 3/4" x 100', 28-Gauge, Galvanized Steel, Pipe Hanger Strap. Each (10/Box).

## Plastic Pipe Hanger Strap




Item #
<b>1113038</b> 3/4" x 100', Plastic Pipe Hanger Strap, 0.050 Thick. Each (20/Box).

## Stove Bolt



Item #
<b>651434</b> Pipe Strap (Stove) Bolt with Hex Nut, 3/4"L x 1/4". Box (100/Box).

## Roof Jacks - MG1E/M5SB

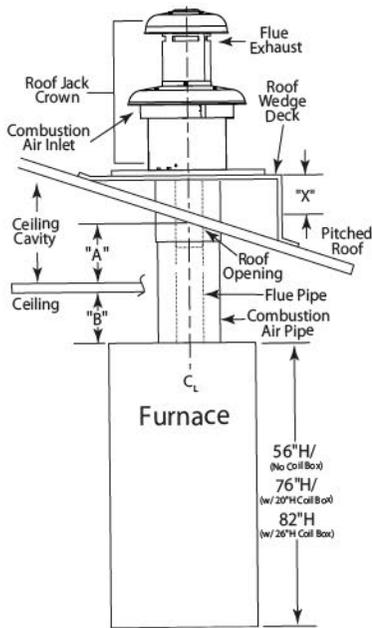

Roof Wedges



Item #
<b>903658</b> Aluminum Roof Jack, 0" x 12" Pitch, 15"-23".
<b>903659</b> Aluminum Roof Jack, 0" x 12" Pitch, 21"-35".
<b>903660</b> Aluminum Roof Jack, 0" x 12" Pitch, 27"-47".
<b>903662</b> Aluminum Roof Jack, 2.5" x 12" Pitch, 21"-35".
<b>903663</b> Aluminum Roof Jack, 2.5" x 12" Pitch, 27"-47".
<b>903664</b> Aluminum Roof Jack, 2.5" x 12" Pitch, 35"-63".
<b>903665A</b> 35"-63", Adjustable, 4" x 12" Pitch, Aluminum, Roof Jack.
<b>903666A</b> 51"-95", Adjustable, 4" x 12" Pitch, Aluminum, Roof Jack.
<b>903678A</b> 27"-47", Adjustable, 4" x 12" Pitch, Aluminum, Roof Jack.
<b>920638</b> Aluminum Roof Jack, 2.5" x 12" Pitch, 51"-95".

NOTES: Not for use with 4" x 12" Pitch Roof Jacks.  
 Roof Jack Length = "A" + "B" + "X".  
 "X" is included only if a wedge is used, see table for "X-Value".  
 "A" = Roof Height - Ceiling Height.  
 "B" = Ceiling Height - Furnace Height.  
 Measure with respect to Roof Jack center-line.  
 The calculated Roof Jack Length must be within the "Range".  
 0" x 12" → Flashing flexes from 0/12 to 1/12.  
 2-1/2" x 12" → Flashing flexes from 1/12 to 4/12.  
 4-1/2" x 12" → Flashing flexes from 3/12 to 5/12.



Item #	Total Pitch with 0" x 12" Pitch	Total Pitch with 2-1/2" x 12" Pitch	X-Value
<b>903893</b> 2" x 12" Roof Wedge USED WITH: CMF2, CMF3, MG1E, M5SB	2" x 12" →	4-1/2" x 12" →	2-3/8"
	2-1/2" x 12" →	5" x 12" →	2-1/2"
<b>903894</b> 3" x 12" Roof Wedge USED WITH: CMF2, CMF3, MG1E, M5SB	3" x 12" →	5-1/2" x 12" →	2-7/8"
	3-1/2" x 12" →	6" x 12" →	3-1/4"
<b>903895</b> 4" x 12" Roof Wedge USED WITH: CMF2, CMF3, MG1E, M5SB	4" x 12" →	6-1/2" x 12" →	3-5/8"

NOTE: 0" x 12" → Flashing flexes from 0/12 to 1/12.

## Roof Jacks - CMF



Item #
<b>104060000</b> SRJ1 Roof Jack, 0/12, 0-12", 1PC, CMF. USED WITH: CMF2, CMF3
<b>104060003</b> SRJ2 Roof Jack, 0/12, 13-24", 1PC, CMF. USED WITH: CMF2, CMF3
<b>104060015</b> SRJ3 Roof Jack, 0/12, 25-36", 2PC, CMF. USED WITH: CMF2, CMF3
<b>104060018</b> SRJ4 Roof Jack, 0/12, 37-48", 2PC, CMF. USED WITH: CMF2, CMF3
<b>104060024</b> SRJ5 Roof Jack, 0/12, 49-59", 2PC, CMF. USED WITH: CMF2, CMF3

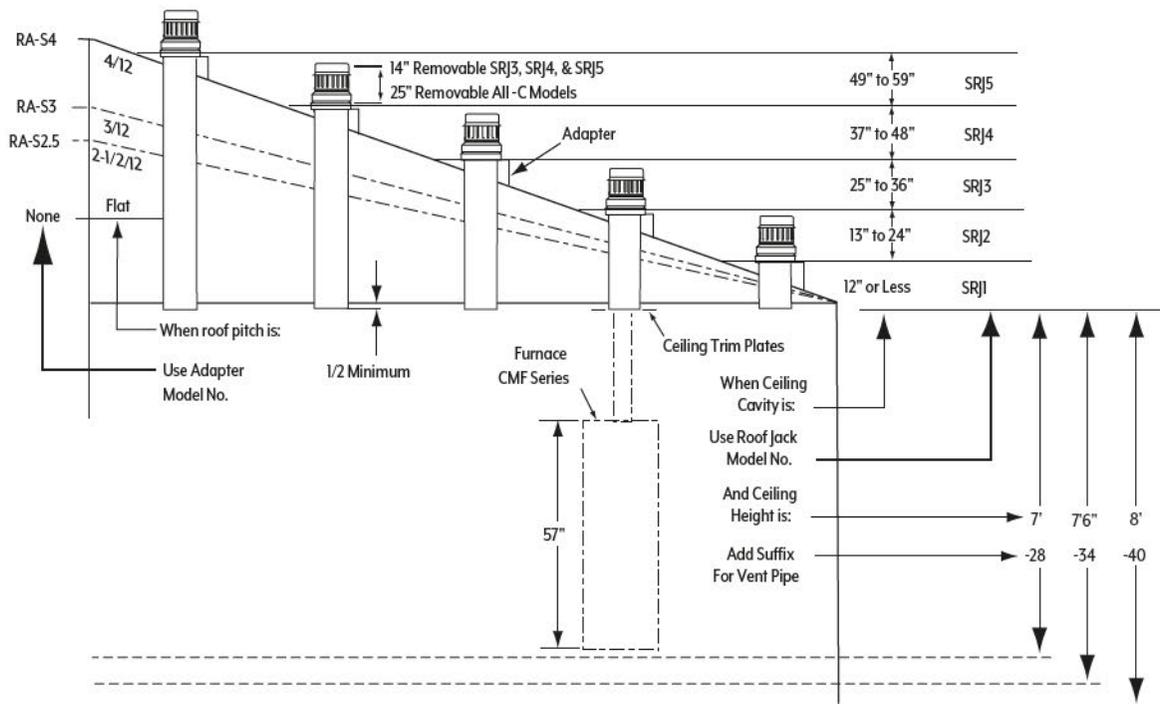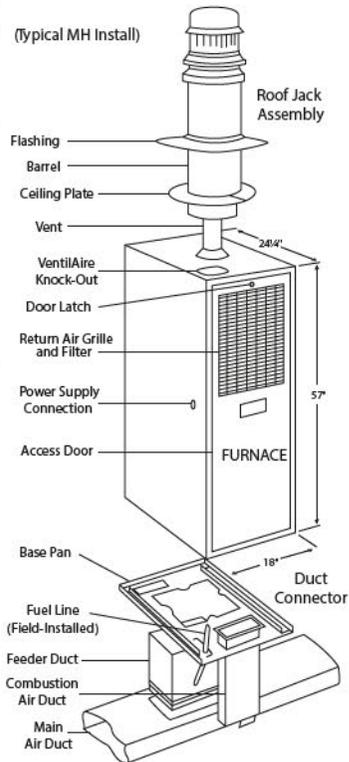

**NOTES:**  
 SRJ1 & SRJ2 Models are one piece construction  
 SRJ3, SRJ4, & SRJ5 Models are two piece construction  
 -C Models are two piece construction

**OPTIONAL:**  
 Add -C for Raised Inlet Models (Example: SRJ3-34-C)  
 Roofjack Adapter (for mounting roofjack on pitched roof)  
 Protective Cap (used when top of roofjack is removed)

## Sweat Fit Line Sets



Item #
<b>13S7525</b> 25 ft, Copper, 3/8" Ø Liquid Line, 3/4" Ø Suction Line, 1/2" Closed-cell Foam Insulated Suction Line Each. USED WITH: HSA4, HSH4
<b>13S7530</b> 30 ft, Copper, 3/8" Ø Liquid Line, 3/4" Ø Suction Line, 1/2" Closed-cell Foam Insulated Suction Line Each. USED WITH: HSA4, HSH4
<b>13S7550</b> 50 ft, Copper, 3/8" Ø Liquid Line, 3/4" Ø Suction Line, 1/2" Closed-cell Foam Insulated Suction Line Each. USED WITH: HSA4, HSH4
<b>13S7825</b> 25 ft, Copper, 3/8" Ø Liquid Line, 7/8" Ø Suction Line, 1/2" Closed-cell Foam Insulated Suction Line Each. USED WITH: HSA4, HSH4
<b>13S7830</b> 30 ft, Copper, 3/8" Ø Liquid Line, 7/8" Ø Suction Line, 1/2" Closed-cell Foam Insulated Suction Line Each. USED WITH: HSA4, HSH4
<b>13S7850</b> 50 ft, Copper, 3/8" Ø Liquid Line, 7/8" Ø Suction Line, 1/2" Closed-cell Foam Insulated Suction Line Each. USED WITH: HSA4, HSH4

NOTE: Must seal ends of insulated line(s) upon installation.

## Supply and Return Air Kit.



Item #
<b>112012</b> Supply and Return Air Kit. Each. USED WITH: Flex Duct, P95, Q95

## Thermostats



Item #
<b>111001</b> Cool-Only Thermostat. (No Changeover). Each.
<b>111002</b> Heat-Only Thermostat. (No Changeover). Each.
<b>111003</b> 1Ht-1CI, MCO-Manual Changeover, Heat and Cool, 5-Wire, Thermostat. Each.
<b>111004</b> 2Ht-1CI, MCO, Digital, Programmable, Heat Pump, Thermostat. Each.



**111005**  
2Ht-1CI, MCO, Digital, Non-Programmable, Heat Pump,  
Thermostat.  
Each.



**111006**  
1Ht-1CI, MCO, Digital, Programmable, Thermostat.  
Each.



**111007**  
1Ht-1CI, MCO, Digital, Non-Programmable, Thermostat.  
Each.



**111010**  
2Ht-1CI, MCO/ACO, Digital, Programmable, Dual Fuel  
Capable, LCD Touchscreen, Thermostat. Each.

## Tie-Down Kits



**1010032**  
Standard Condenser Pad Mounting Kit.  
Each.  
USED WITH: HSA4, HSH4



**NCUTD8KG**  
Condenser Tie-down/Mounting Kit, 8-Brackets, Florida-  
certified.  
Each.  
USED WITH: HSA4, HSH4

## Universal Base Packages



Item #
<b>903450</b> MA-100 Universal Base Package with 8" Feeder Duct. Each. USED WITH: CMF3, CMF2
<b>903451</b> MA-100 Universal Base Package with 13" Feeder Duct. Each. USED WITH: CMF3, CMF2
<b>903453</b> MA-200 Base Package with 8" Feeder Duct. Each. USED WITH: CMF3, CMF2

## Universal Hard-Start Kit



**912933**  
Universal Hard-Start Assist.  
Each.

## Upflow Stand



Item #
<b>1014501</b> Upflow Stand with Door. Each. USED WITH: E7EU, E7EM

## Vent Pipes



Item #
<b>103947002</b> 28"H Furnace to SRJ# Vent Pipe. Each. USED WITH: CMF3, CMF2

<b>103947004</b> 34"H Furnace to SRJ# Vent Pipe. Each. USED WITH: CMF3, CMF2
---

<b>103947005</b> 40"H Furnace to SRJ# Vent Pipe. Each. USED WITH: CMF3, CMF2
---




<b>901697</b> Offset Vent Pipe. Each. USED WITH: CMF3, CMF2
--

## Vent Transition Kit



Item #
<b>904106</b> 2-Pipe Vent Transition Kit (old RJ opening). Each. USED WITH: MG2R, MG2S

## VentilAire™ Kits

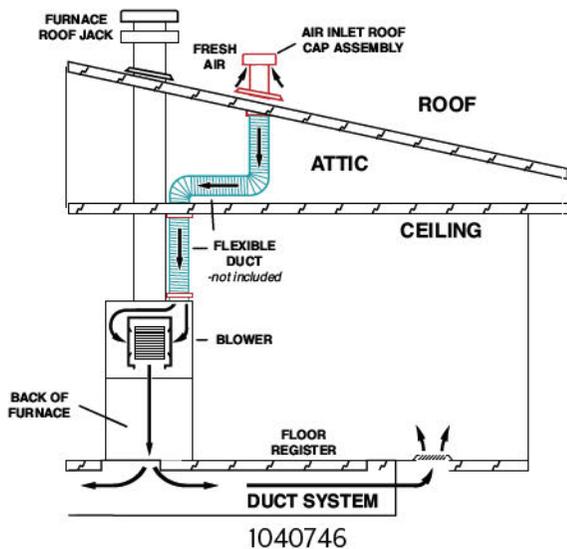

Item #
<b>1040746</b> VentilAire™ III Kit, Whole Home Fresh Air, Sloped Roof. Each. USED WITH: E7, CMF3, CMF2, M5SB, MG1E, MG2S, MG2R, MG3P
<b>914229B</b> VentilAire™ IV Kit, Whole Home Fresh Air, Sloped Roof. Each. USED WITH: E7, CMF3, CMF2, M5SB, MG1E, MG2S, MG2R
<b>917201A</b> VentilAire™ III, Soffit Vent System Kit. Each. USED WITH: E7, CMF3, CMF2, M5SB, MG1E, MG2S, MG2R

## NORDYNE

### Limited PARTS Warranty

**Manufactured Housing warranty effective for equipment manufactured on or after January 01, 2025**

**STANDARD ONE YEAR LIMITED PARTS WARRANTY:**

**Nordyne** extends a Standard Limited Warranty on the parts of manufactured housing equipment for a period of one year from the original purchase date by the original purchasing **homeowner** only. **All coverage terminates to any other subsequent owner, with the exception of the states Florida and Texas.** If any part fails due to defects in materials or workmanship under normal use within one year from the date of original purchase, a replacement part will be provided free of charge except for the freight costs which are the owner's responsibility. **Nordyne** will not pay for parts purchased in the field from other than a **Nordyne** distributor. Replacement parts are warranted only for the balance of the original warranty period. Parts purchased for equipment outside of the warranty period have a 1 year limited parts warranty. **Fixed amount 1 year limited labor** coverage is paid directly to the distributor or servicing contractor. Any expenses charged by the servicing contractor above the amounts provided by Nordyne are the homeowner's responsibility.

**Split System Outdoor Units**

Coverage includes the standard 1 year limited parts and 5 year limited compressor warranty. If registered with an AHRI match system, within 60 days of installation, coverage is extended to 5 year limited parts and 10 year limited compressor.

**All Package Units**

Coverage includes the standard 1 year limited parts and 5 year limited compressor warranty. If registered, within 60 days of installation, coverage is extended to 10 year limited parts including the compressor.

**Furnace Warranty**

**Below 90% Gas and Oil, and Electric furnaces, and Air Handlers**

Coverage includes the standard one year limited parts warranty. If registered with an AHRI match system (3-piece AHRI system match, i.e. furnace+coil+outdoor or airhandler+coil+outdoor) within 60-days of installation or occupancy, coverage is extended to 5 year limited parts.

**90%+ Gas and Oil furnaces**

Coverage includes the standard one year limited parts warranty. If registered within 60 days of installation or occupancy, coverage is extended to 5 year limited parts.

**Additional Heat Exchanger Parts Coverage for Gas/Oil Furnaces and Gas Package Units:**

Below 90% AFUE furnaces and gas /electric packaged systems: 10 year limited heat exchanger warranty  
 90+% AFUE furnaces: 20 year limited heat exchanger warranty.

**Appliance Trade-in Option:**

If a replacement part is not available for this unit, **Nordyne** will not issue a refund for the unit, but will issue a credit to a **Nordyne** distributor for the part. The credit will be passed to the service firm and then to the user/owner of the appliance and be applied to the purchase of a new Nordyne unit.

**Consumer Registration:**

Register online at <https://nordynewarranty.com> or, for assistance, please call your installer. For extended registered warranty terms to apply, registration must be completed within 60 days of installation or occupancy. For split systems, below 90% AFUE and Electric furnaces, and Air Handlers, a complete Nordyne AHRI matched system must be installed. For equipment not registered or matched, the unregistered base warranty applies.

Before you Register What do I need to get started?

- The serial number and model number for each piece of equipment you purchased.

- The date of installation or occupancy.

- (Optional) The name and address for the dealer or contractor who installed your equipment.

**WARRANTY EXCLUSIONS**

1. Electricity or fuel costs, or increases in electricity or fuel costs from any reason whatsoever, including additional or unusual use of supplemental electric heat.
2. Equipment ordered over the internet, other than from manufacturer or a **Nordyne** authorized distributor, is not covered.
3. Failure and replacement caused by contamination from bacteria are excluded from warranty coverage (i.e. dirty sock syndrome). Consequential or other damage(s) caused by rust, brownouts, soot, blackouts, oxidation, corrosion, water, water condition, freezing, fire, other abnormal environmental conditions or other natural acts

**WARRANTY EXCLUSIONS CONTINUED**

- are excluded from warranty coverage. Premature failure due to the use of inferior building materials such as high sulfur content dry wall, corrosive conditions caused by location, moisture, green slime, etc. are also excluded from warranty coverage.
4. This warranty does not apply to parts that fail as a direct result of environmental influences.

10500940  
 (NEW)  
 (03/25)



## WARRANTY EXCLUSIONS CONTINUED

5. For equipment that is not a Nordyne matched system per manufacturer's recommendations and the Air Conditioning Heating Refrigeration Institute (AHRI), the unregistered base warranty applies. Indoor and outdoor appliances must be installed simultaneously.
6. Nordyne indoor air quality products that can operate without the indoor furnace, coil or air handler such as stand-alone air cleaners, window air conditioning and humidifiers are excluded from this limited warranty.
7. Equipment must be installed per Nordyne's installation instructions. Equipment modifications including but not limited to changes in mechanical design, electrical design, airflow design, refrigerant flow or unauthorized fuel i.e. well head gas voids manufacturer's warranty.
8. The units must be installed in the 50 United States or Canada, Puerto Rico and Mexico are excluded.
9. Product registration is not required in the states of California and Florida or the Province of Quebec.

## WARRANTY CONDITIONS

1. This Nordyne equipment and/or Nordyne accessories must be installed by a licensed or otherwise qualified dealer or contractor, and must be installed in accordance with Nordyne's installation instructions and in compliance with local codes. Improper installation may endanger the occupants of the dwelling. Malfunction caused by installation are not covered.
2. This equipment must be operated in accordance with Nordyne's operating instructions provided with each unit. The product must not be misused.
3. The equipment's rating plate must not be removed or defaced.
4. If the date of original installation cannot be verified, then the warranty period begins (60) days from the date of product

## WARRANTY CONDITIONS CONTINUED

- manufacture ship date (as indicated by the model and serial number). Proof of purchase may be required at time of service.
5. The warranty applies only to products remaining in their original installation location.
6. All equipment requires annual maintenance performed by your servicing dealer or a service technician. Filter changes and/or cleaning filters can be performed by you. You or your servicing dealer may be required to submit proof of annual maintenance, including invoices for materials and or labor charges associated with the annual maintenance. Lack of annual maintenance or failure to provide proof of proper annual maintenance may result in denial of claims under your warranty. You will be responsible for payments of denied claims due to lack of annual maintenance. Nordyne is not responsible for normal maintenance or service or for problems caused by improper installation, application, or operation of the equipment. We recommend semi-annual preventive maintenance inspections on the entire unit and/or accessories by a licensed or otherwise qualified dealer, service technician, or contractor.
7. Information required for a warranty claim: Consumer name, address, phone number, serial numbers, install and service date, servicer company, name, number, and defective part number'.
8. Nordyne approved Evaporator Coils are provided the warranty coverage consistent with the outdoor appliance.
9. **This warranty does not constitute a performance warranty and does not extend to the future performance of goods. It is expressly contemplated by the warranty that any part of the product may contain a defect in material or workmanship, and that any part of the product may fail during the warranty period. The buyer's sole remedy under the warranty is limited to a replacement part in the event a part fails due to a defect in material or workmanship.**

## THERE ARE NO OTHER WARRANTIES, EXPRESS OR IMPLIED, EXCEPT AS SET FORTH ABOVE.

**The foregoing warranty is exclusive and in lieu of any other warranties, express or implied, including any warranty of merchantability and any warranty of fitness for a particular purpose, and shall constitute the buyer's sole remedy and Nordyne's sole liability for the product or any parts of the product. All implied warranties of merchantability and all implied warranties of fitness for a particular purpose relating to the product or any parts of the product are hereby disclaimed. Under no circumstances shall Nordyne be liable for incidental or consequential damages resulting from breach of any express warranty.**

### Instructions to the Owner for Service

To obtain warranty service, you are required to show the servicer a bill of sale for the equipment or other evidence of purchase to establish the original date of purchase and proof of ownership. If you suspect a defect in your equipment or are in need of service, please contact the **installer** of the unit to obtain assistance. If unsuccessful, please

contact a Nordyne dealer or Nordyne distributor in your area. If unable to obtain local assistance, please call:

**Warranty Department Phone: 1-800-422-4328**

All claims are filed by the dealer to the distributor to Nordyne for processing. Claims will not be accepted by anyone other than a distributor. Warranty claims must be filed by distributor within 90 days of equipment service date.

### Limited Warranty for Commercial Use

No labor coverage on units installed in commercial applications. Commercial use of equipment changes the Warranty Period as follows: Parts are warranted for a period of one year from the original purchase date.

Compressor: If any compressor fails due to a defect in material or workmanship within the first 5 years from the date of original purchase, a replacement compressor will be provided free of charge except for the freight costs which are the owner's responsibility. Nordyne will not pay for parts purchased in the field from other than a Nordyne distributor. The **owner is responsible for all labor charges**. Replacement parts are warranted only for the balance of the original limited warranty period.

Heat Exchanger Parts Coverage: 10 year limited warranty.

# Product Assurance Commitment (Repair Labor)

## AFTERMARKET PAC FLAT-FEE SCHEDULE

EQUIPMENT-REPAIR TYPE	AMOUNT
<b>FURNACES</b>	
Heat Exchanger Repair/Replacement	\$150
<b>COMPRESSOR BEARING UNITS</b>	
Compressor Changes	\$250
Refrigerant Component Changes (i.e. evaporator coil, reversing valve, and condensing coil)	\$225
Refrigerant Leak Repair	\$150
All Other Minor Components	\$75

## OEM HOMEBUILDER FLAT-FEE SCHEDULE

EQUIPMENT-REPAIR TYPE	AMOUNT
<b>FURNACES</b>	
Heat Exchanger Repair/Replacement	\$275
<b>COMPRESSOR BEARING UNITS</b>	
Compressor Changes	\$250
Refrigerant Component Changes (i.e. evaporator coil, reversing valve, and condensing coil)	\$225
Refrigerant Leak Repair	\$150
All Other Minor Components	\$140

**NOTES:**

- Labor will only be paid directly to a distributor or installing contractor (dealer).
- This applies to equipment that fails within one (1) year from date of installation by a licensed contractor.
- Set up time and diagnostics are included in the rates.
- Nordyne HVAC reserves the right to discontinue or change at any time.
- Mileage Flat Rate: \$50.00 (not included in labor rates shown above).
- Refrigerant: \$16.00 per pound with the maximum amount of refrigerant allowed is the specified system charge plus one additional pound. (not included in labor rates shown above).



## Manufactured Housing Products



### HVAC

#### Manufactured Housing Furnaces

E7 100% AFUE Electric Furnaces  
 MG2S 96% AFUE 2-Stage Gas  
 MG2R 95% AFUE Gas  
 VMC & VMA 95% AFUE Gas  
 MG3P 92% AFUE Gas  
 MGIE 80% AFUE Gas  
 M5SB 83% AFUE Oil  
 CMF 80%+ AFUE Gas & Oil

#### Central-Air Split System Condensers

HSA4 Sweat Fit North & South  
 Air Conditioners  
 HSH4 Sweat Fit MI Heat Pumps

#### Manufactured Housing Indoor A-Coils

Sweat Fit R-410A Tube-In-Fin  
 Sweat Fit R-410A Micro-Channel  
 Sweat Fit Tube-in-Fin Replacement-Service

#### Self-Contained Packaged Units

W3P/H3HK Electric Heater Assemblies  
 Q95 Packaged Heat Pumps  
 P95 Packaged Air Conditioners

#### HVAC System Accessories

Electrical, Pads, & Mounting Hardware  
 Wyes, Collars, Flex-Duct, Registers, & Grilles  
 Thermostats & Retrofit Controls

#### OEM & Generic Replacement Parts

#### Central-Air Split System Condensers

Electrical, Pads, & Mounting Hardware  
 Wyes, Collars, Flex-Duct, Registers, & Grilles  
 Thermostats & Retrofit Controls

#### Manufactured Housing Indoor A-Coils

Sweat Fit R-410A Tube-In-Service  
 Sweat Fit R-454B Rated  
 Sweat Fit R-32 Rated

#### Self-Contained Packaged Units

WZH/PHTR Electric Heater Assemblies  
 PHJ Packaged Heat Pumps  
 PAJ Packaged Air Conditioners



### EXTERIOR

#### Foundation Covers

Titan XTERIOR Prime  
 Titan XTERIOR Elite - Insulated  
 Mason's Collection - Brick & Rock  
 Valor Vinyl Skirting  
 Vinyl Skirting - Premium Plus & Eagle  
 NOVIK® Shakes, Stone & Accents

#### Vinyl Siding, Soffit, & Accessories

Harbour Crest™ Vinyl Siding  
 DuraSpan® Soffit  
 Open Louvered Shutters  
 Raised Panel Shutters  
 Vents, Mounts, & Blocks  
 Roof Coatings



### STEPS, DECKS & RAILS

#### Duragrip™ Fiberglass Coated Steps

The 72" & 48" Wide  
 The Platform Step  
 The Economist  
 Economy Steps  
 Deluxe & Standard Rails



### DOORS

#### Exterior Doors

Six-Panel Steel Outswing  
 Combo Exterior-Storm  
 Exterior Storm  
 Decorative Exterior  
 Rolling Glass Doors  
 Four-Seasons Door

#### Interior Doors

White, 6-Panel  
 White Oak, Smooth, Embossed

#### Interior Molding & Trims

#### Door & Window Replacement Parts



### WINDOWS

Aluminum Vertical Sliders  
 Aluminum Vertical Self Storing Storm Windows  
 Vinyl Single-Hung Double-Pane Windows  
 Skylights



### SET UP & TRANSPORTATION

#### Minute Man® Foundation Systems

#### Tie Down Foundation Systems

#### Anchor Products

Soil, Coral & Cross Drive (Rock)  
 Double-Tension Head & Eye  
 ABS & Steel Stabilizer Plates  
 Boards, Wedges, Piers & Pier Pads  
 Strap Assemblies with Connectors  
 Tools & Accessories

#### Transportation Products

Tarps & Plastic Sheeting  
 Bottle Jacks & Repair Kits  
 Wheel & Axle Replacement Parts



### PLUMBING

#### Home Improvement Products

Faucets & Faucet Accessories  
 Tubs, Showers, Surrounds, & Accessories  
 Toilets, Sinks, & Replacement Parts  
 Water Heaters & Replacement Parts  
 Indoor/Outdoor Plumbing Supplies  
 Tools & Fasteners  
 Adhesives, Sealants, & Tapes



### ELECTRICAL

#### Appliances


Electric Range  
 Refrigerator  
 Washer & Dryer

#### Indoor/Outdoor Electrical Fixtures & Supplies





is  
Nationwide

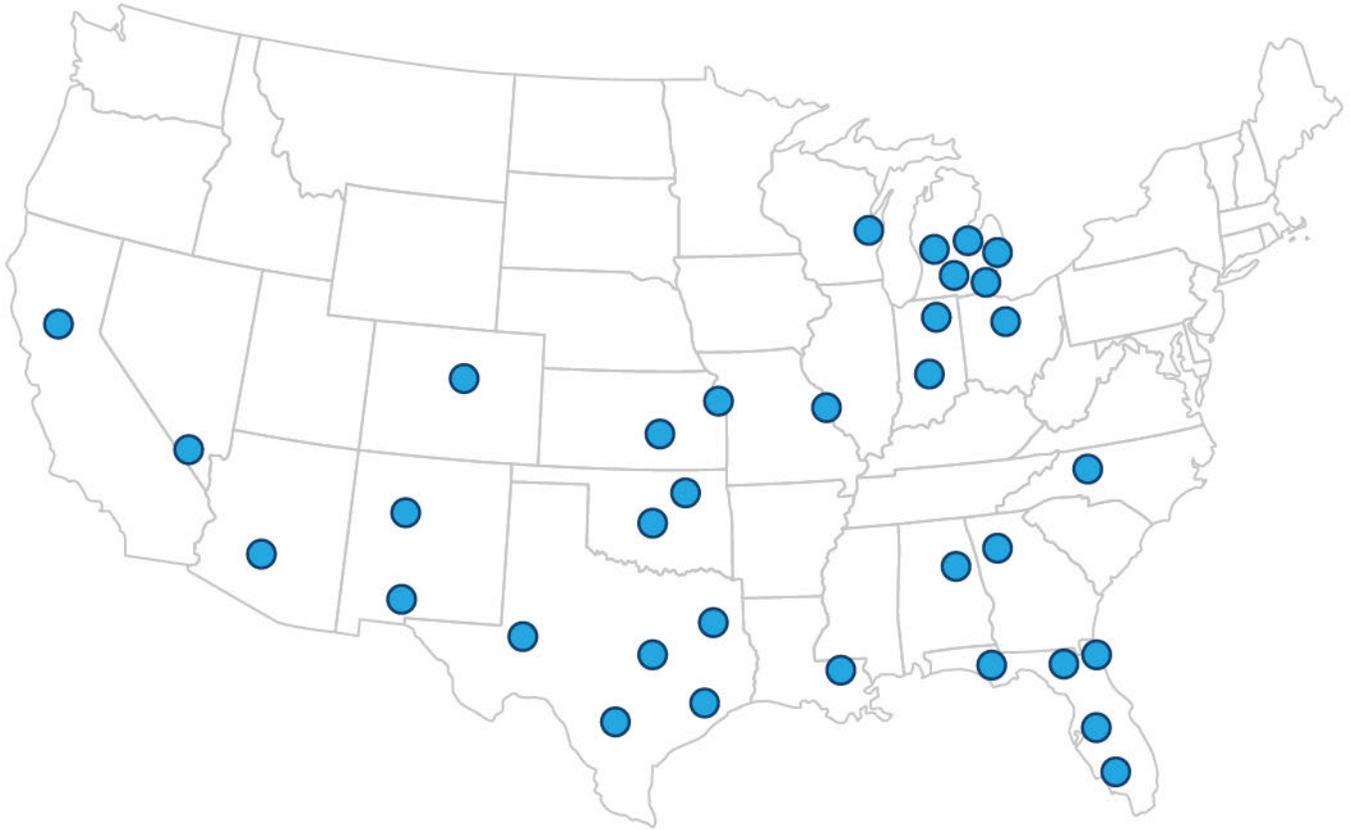

ALBUQUERQUE, NM · ATLANTA, GA · CHESTERFIELD, MI · DENVER, CO · FENTON, MO · FLINT, MI  
FOND DU LAC, WI · FORT MYERS, FL · FREMONT, OH · FORT WORTH, TX · GOSHEN, IN · GRAND RAPIDS, MI  
HAMMOND, LA · HOUSTON, TX · INDIANAPOLIS, IN · JACKSONVILLE, FL · LAKE CITY, FL · LAKELAND, FL  
LANSING, MI · LAS CRUCES, NM · LAS VEGAS, NV · LENEXA, KS · ODESSA, TX · OKLAHOMA CITY, OK  
PANAMA CITY, FL · PHOENIX, AZ · ROMULUS, MI · SACRAMENTO, CA · SAN ANTONIO, TX · TALLADEGA, AL  
TAYLOR, MI · TULSA, OK · TYLER, TX · WACO, TX · WICHITA, KS · WINSTON-SALEM, NC



800.945.4440