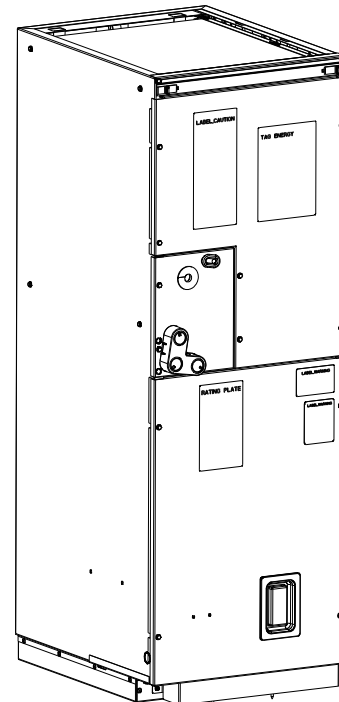


FEVB**Vertical Configuration Electric Furnace with ECM Motor,
and NAVA5 Accessory Coil for R-454B Refrigerant
Sizes 2T - 5T****Product Specifications****FEVB FEATURES / BENEFITS**

- Sizes 2 thru 5 tons
- Multiple electrical entry locations
- Factory installed heater packages from 10 kW - 20 kW available separately
- Approved for use in manufactured housing
- 208/230-1-60 supply voltage
- 1 inch thick insulation with R value of 4.2
- ECM 5-speed motor
- Designed for vertical (upflow / downflow) configuration installs only
- Low voltage circuit protective fuse (3A) in-line on wire harness
- For field use, plug connection to R-454B Dissipation Control
- Compatible with R-454B and R-410A coils, and R-454B and R-410A outdoor units respectively

* Applies to original purchaser/homeowner and not available to subsequent owners, except in jurisdictions where laws dictate otherwise. See Warranty certificate for complete details and restrictions.

**LIMITED WARRANTY****FEVB Vertical Configuration Electric Furnace**

- 1 year limited warranty
For manufactured housing applications only.
See warranty certificate for complete details and restrictions.

NAVA5 Accessory Coil

- Default 5-year parts limited warranty
– 10-year parts limited warranty with timely registration *.
Equipment must be registered within 90 days of original installation, except in jurisdictions where warranty benefits cannot be conditioned on registration.

A200509A



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



A200511

Table 1 – Dimensions

Model Number	Size (Ton)	Nom. CFM	Operating Dimensions H x W x D, in. (mm)	Filter Size, in. (mm)	Shipping Dimensions H x W x D, in. (mm)	Wt lb. (kg)	Ship Wt w /pallet
FEVB002410BA	2	700	49-5/8 x 17-5/8 x 22-1/16 (1260.5 x 447.7 x 560.4)	16 x 20 x 1 (406 x 508 x 25)	53-1/2 x 18-3/4 x 24 (1358.9 x 476.3 x 609.6)	97 (44.0)	109 (49.4)
FEVB003610BA	3	1050	49-5/8 x 17-5/8 x 22-1/16 (1260.5 x 447.7 x 560.4)	16 x 20 x 1 (406 x 508 x 25)	53-1/4 x 19 x 24-1/4 (1352.6 x 482.6 x 616)	99 (44.9)	111 (50.4)
FEVB003612BA	3	1050	49-5/8 x 17-5/8 x 22-1/16 (1260.5 x 447.7 x 560.4)	16 x 20 x 1 (406 x 508 x 25)	53-1/4 x 19 x 24-1/4 (1352.6 x 482.6 x 616)	100 (45.4)	112 (50.8)
FEVB003615BA	3	1050	49-5/8 x 17-5/8 x 22-1/16 (1260.5 x 447.7 x 560.4)	16 x 20 x 1 (406 x 508 x 25)	53-1/4 x 19 x 24-1/4 (1352.6 x 482.6 x 616)	101 (45.8)	113 (51.3)
FEVB004815CA	4	1400	53-7/16 x 21-1/8 x 22-1/16 (1357.3 x 536.6 x 560.4)	20 x 20 x 1 (508 x 508 x 25)	57-1/4 x 22-1/2 x 24 (1454.2 x 571.5 x 609.6)	116.5 (52.8)	133 (60.3)
FEVB006020DA	5	1750	59-3/16 x 24-11/16 x 22-1/16 (1503.4 x 627.1 x 560.4)	20 x 24 x 1 (508 x 610 x 25)	62-3/4 x 26 x 24-1/2 (1593.9 x 660.4 x 622.3)	131 (59.4)	147.5 (66.9)

Table 2 – FEVB Fan Coil Model Number Identification Guide

Digit Position	1	2	3	4	5, 6	7,8	9,10	11	12
F F = Fan Coil	F UNIT	E	V	B	00	24	10	B	A (Sales Code)
E = ECM	MOTOR TYPE		V = Vertical (Upflow / Downflow)	B	00	24	10	B	A
V = Vertical (Upflow / Downflow)	INSTALLATION TYPE								
B	SERIES								
00 = No Refrigerant Coil	REFRIGERANT				24 36 = 36,000 BTUH = 3 tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons MAX COOLING CAPACITY	10 12 = 12 kW 15 = 15 kW 20 = 20 kW ELECTRIC HEAT	B	A	
24 = 24,000 BTUH = 2 tons									
36 = 36,000 BTUH = 3 tons									
48 = 48,000 BTUH = 4 tons									
60 = 60,000 BTUH = 5 tons	MAX COOLING CAPACITY				24 36 = 36,000 BTUH = 3 tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons MAX COOLING CAPACITY	10 12 = 12 kW 15 = 15 kW 20 = 20 kW ELECTRIC HEAT	B	A	
10 = 10 kW									
12 = 12 kW									
15 = 15 kW									
20 = 20 kW	ELECTRIC HEAT				24 36 = 36,000 BTUH = 3 tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons MAX COOLING CAPACITY	10 12 = 12 kW 15 = 15 kW 20 = 20 kW ELECTRIC HEAT	B	A	
B = 17-5/8"									
C = 21-1/8"									
D = 24-11/16"									
					CABINET WIDTH				

Table 3 – NAVA5 Accessory Coil Model Number Identification Guide

Digit Position	1	2	3	4	5	6, 7	8, 9	10, 11
N = Branding	N	A	V	A	5	36	01	CK
A = Product Group (Accessory)								
V = Vertical Coil (Upflow / Downflow)								
A = Major Series								
5 = R-454B Refrigerant Type								
36 = 36,000 BTUH = 3 tons						Unit Size		
48 = 48,000 BTUH = 4 tons								
60 = 60,000 BTUH = 5 tons								
01 = 1 Piece						Pieces Shipped		
CK = Coil Kit								Type of Kit

Table 4 – Physical Data/Specifications - FEV

NAVA5 Accessory Coil Specifications						
Unit	NAVA53601CK				NAVA54801CK	NAVA56001CK
Face Area (sq. ft)	3.96				5.93	7.42
Refrigerant Sweat or Press Fit Liquid Line Connection, in (mm)	3/8 (9.5) ID					
Refrigerant Sweat or Press Fit Suction Line Connection, in (mm)	3/4 (19.1) ID				7/8 (22.2) ID	
Metering Device Puron Refrigerant	TXV					
Unit	FEVB002410*	FEVB003610*	FEVB003612*	FEVB003615*	FEVB004815*	FEVB006020*
Filters						
The fan coil filter rack can accommodate most common size filters as well as some smaller filters with minimal modification.						
Market Specified Filter Dimensions (W x L), in (mm)	16 x 20 (406 x 508)				20 x 20 (508 x 508)	24 x 20 (584 x 508)
Actual Filter Dimensions (W x L), in (mm) to Fit Fan Coil	up to 16.5 x 19.75 (425 x 502)				up to 19.75 x 19.75 (502 x 502)	up to 23.75 x 19.75 (603 x 502)
Blower Assembly						
Motor Type	Multi-tap ECM					
Motor HP	1/3	1/2			3/4	
CFM	700	1050			1400	1750

Table 5 – Dimensional Data (refer to drawings)

Unit Size	Size (ton)	Dimensions, in. (mm)									Coil Type	Wt, lb (kg)
		A	B	C	D	E	F	G	Suction	Liquid		
FEVB002410*	2	49-5/8 (1260.5)	17-5/8 (447.7)	15-3/4 (400.0)	15-5/8 (396.9)	15-3/4 (400.6)	23-1/2 (596.4)	23-3/16 (588.2)	3/4	3/8	A	97 (44.0)
FEVB003610*	3	49-5/8 (1260.5)	17-5/8 (447.7)	15-3/4 (400.0)	15-5/8 (396.9)	15-3/4 (400.6)	23-1/2 (596.4)	23-3/16 (588.2)	3/4	3/8	A	99 (44.9)
FEVB003612*	3	49-5/8 (1260.5)	17-5/8 (447.7)	15-3/4 (400.0)	15-5/8 (396.9)	15-3/4 (400.6)	23-1/2 (596.4)	23-3/16 (588.2)	3/4	3/8	A	100 (45.4)
FEVB003615*	3	49-5/8 (1260.5)	17-5/8 (447.7)	15-3/4 (400.0)	15-5/8 (396.9)	15-3/4 (400.6)	23-1/2 (596.4)	23-3/16 (588.2)	3/4	3/8	A	101 (45.8)
FEVB004815*	4	53-7/16 (1357.3)	21-1/8 (536.6)	19-1/4 (489.0)	19-1/8 (485.8)	19-3/4 (201.1)	27-5/16 (693.4)	27 (685.2)	7/8	3/8	A	116.5 (52.8)
FEVB006020*	5	59-3/16 (1503.4)	24-11/16 (627.1)	22-3/4 (577.8)	22-11/16 (576.3)	25-7/16 (645.9)	33 (838.4)	32-11/16 (830.2)	7/8	3/8	A	131 (59.4)

NOTE:
1. SERIES DESIGNATION IS THE 12TH AND 13TH POSITION OF UNIT PRODUCT NUMBER.
2. ALL DIMENSIONS ARE IN "INCHES" UNLESS NOTED.

UNIT	SERIES	ELECTRICAL CHARACTERISTICS				A	B	C	D	E	F	G	COIL CONFIGURATION		SHIPPING WT (LBS)
													SLOPE	"A"	
FEVB0024-B	1	X	O			49 5/8"	17 5/8"	15 3/4"	15 5/8"	15 3/4"	23 1/2"	23 3/16"	—	X	XXX
FEVB0036-B	1	X	O			49 5/8"	17 5/8"	15 3/4"	15 5/8"	15 3/4"	23 1/2"	23 3/16"	—	X	XXX
FEVB0048-C	1	X	O			53 7/16"	21 1/8"	19 1/4"	19 1/8"	19 3/4"	27 5/16"	27"	—	X	XXX
FEVB0060-D	1	X	O			59 3/16"	24 11/16"	22 3/4"	22 11/16"	25 7/16"	33"	32 11/16"	—	X	XXX
		208/230-1-60	208/230-3-60			X=YES O=NO									

- NOTES:
1. ALL DIMENSIONS ARE IN "INCHES" UNLESS NOTED.

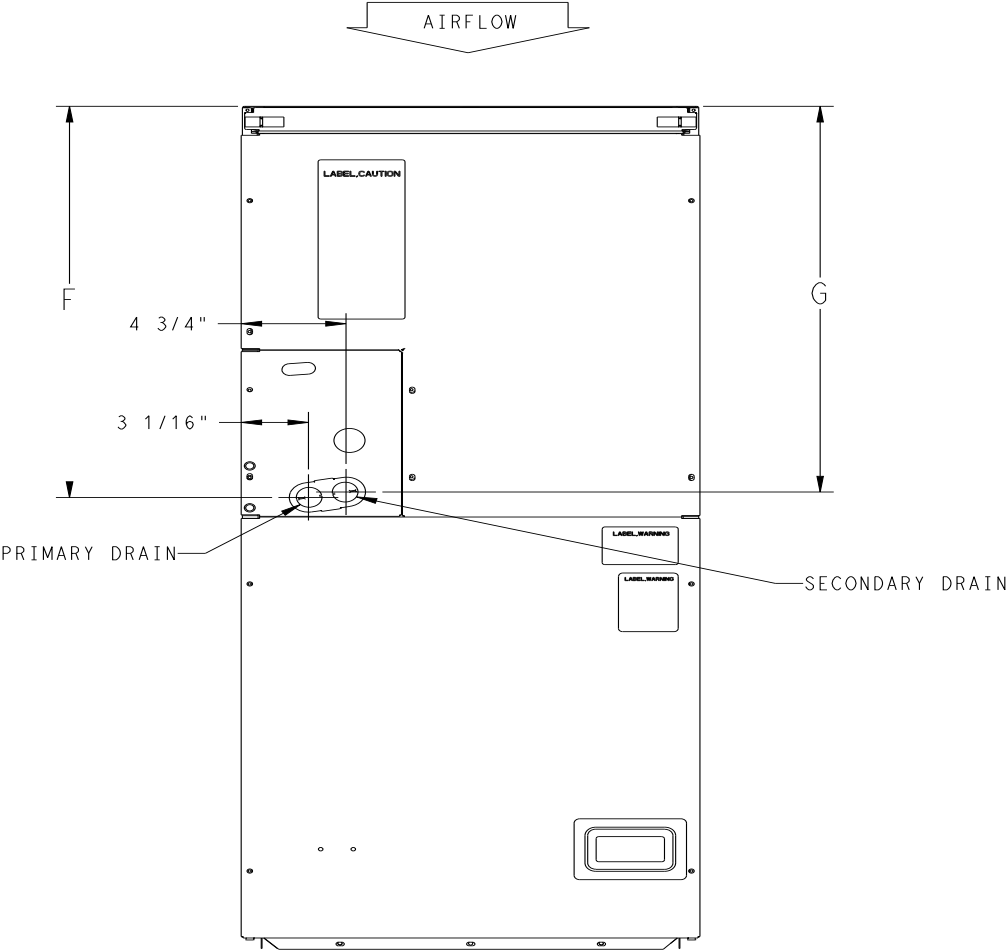


Fig. 2 – FEVB (English) - Sheet 2

A240094

- NOTE:
- 1. SERIES DESIGNATION IS THE 12TH AND 13TH POSITION OF UNIT PRODUCT NUMBER.
 - 2. ALL DIMENSIONS ARE IN "MM" UNLESS NOTED.

UNIT	SERIES	ELECTRICAL CHARACTERISTICS					A	B	C	D	E	F	G	COIL CONFIGURATION		SHIPPING WT (LBS)
														SLOPE	"A"	
FEVB0024-B	1	X	O				1260.5	447.7	400.0	396.9	400.6	596.4	588.2	-	X	XXX
FEVB0036-B	1	X	O				1260.5	447.7	400.0	396.9	400.6	596.4	588.2	-	X	XXX
FEVB0048-C	1	X	O				1357.3	536.6	489.0	485.8	501.1	693.4	685.2	-	X	XXX
FEVB0060-D	1	X	O				1503.4	627.1	577.8	576.3	645.9	838.4	830.2	-	X	XXX
		208/230-1-60	208/230-3-60													

X=YES
O=NO

NOTE: ALLOW 533.4 FROM FRONT FOR SERVICE

UNIT CONNECTION SIZES

SUCTION: 24 & 36 - 19.05 I.D. SWEAT
48 & 60 - 22.23 I.D. SWEAT
LIQUID: 9.53 I.D. SWEAT
CONDENSATE: 19.0 FPT

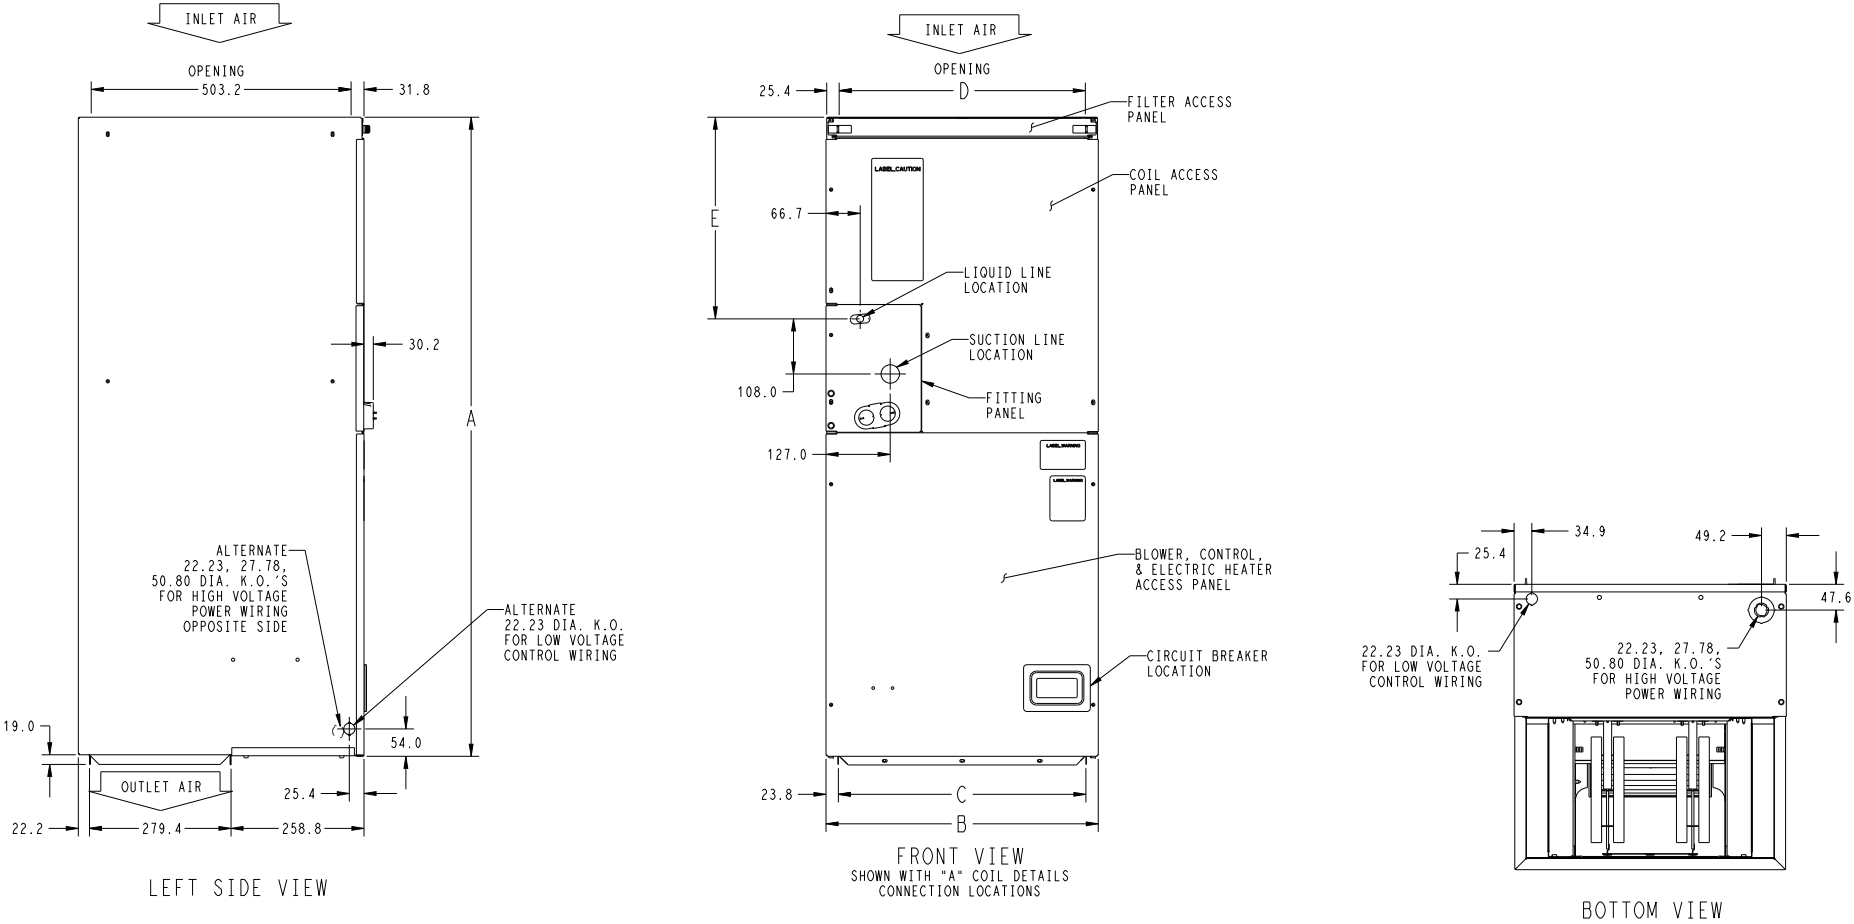


Fig. 3 – FEVB (Metric) - Sheet 1

A240095

NOTES:
1. ALL DIMENSIONS ARE IN "MM" UNLESS NOTED.

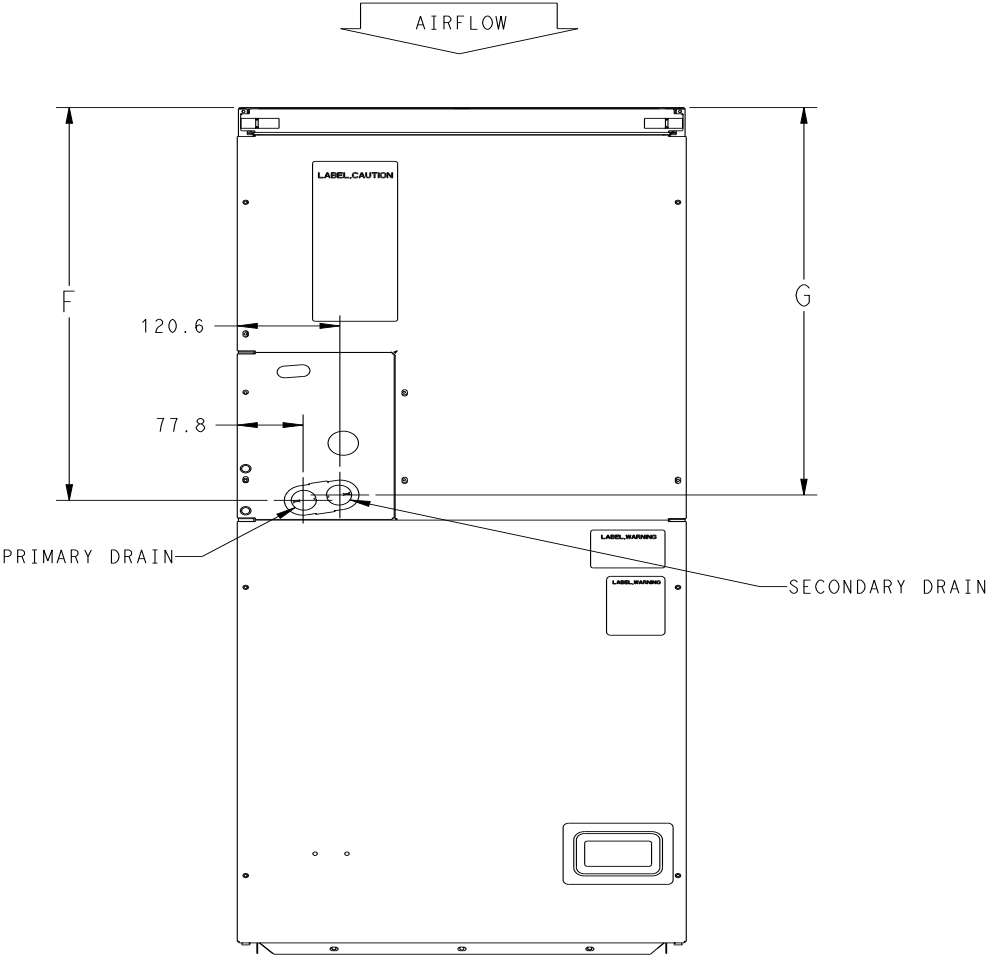


Fig. 4 – FEVB (Metric) - Sheet 2

A240096

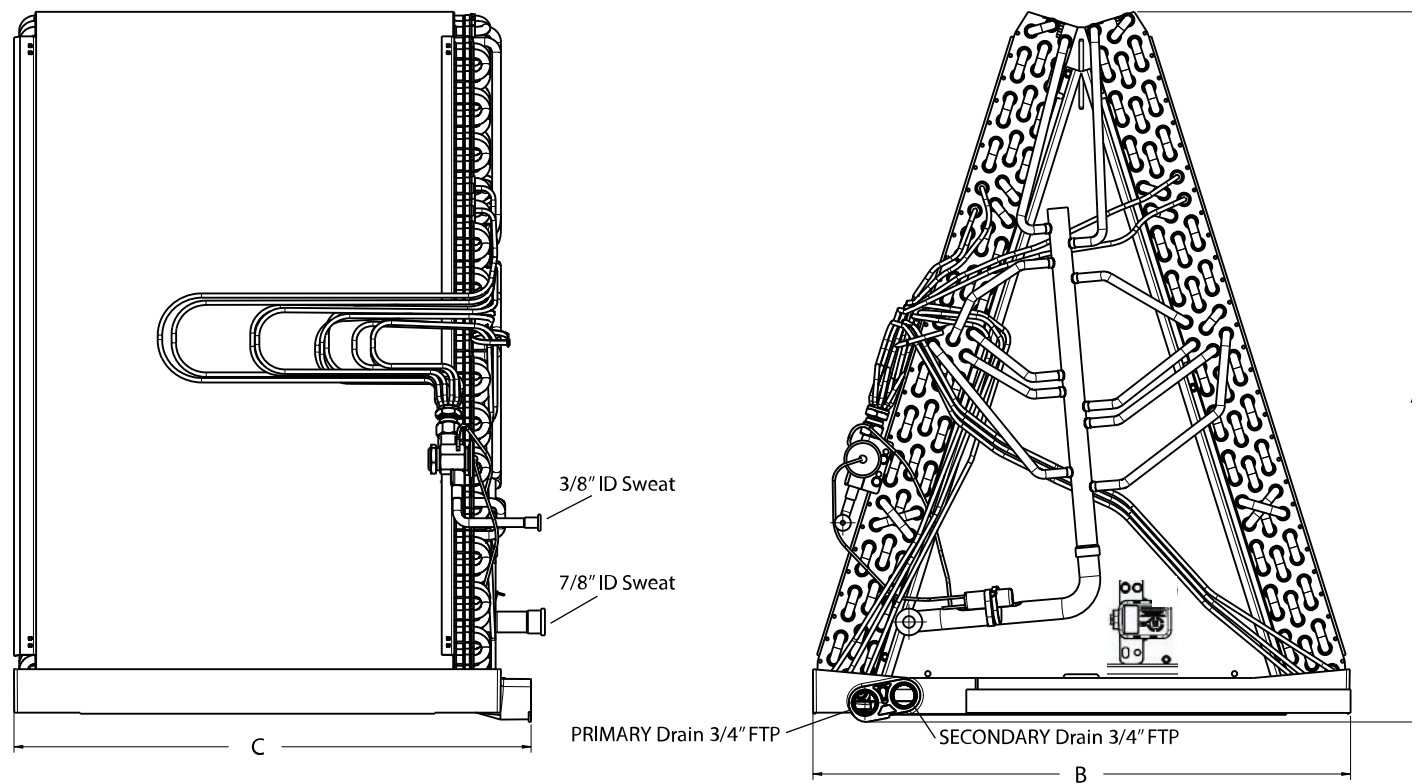


Fig. 5 – A-Coil

A190147A

Table 6 – Physical Data- NAVA5 Accessory Coil

	NAVA53601CK	NAVA54801CK	NAVA56001CK
Operating Dimensions, in. (mm) and Weight, lb. (kg)			
A (height)	16-1/4 (412.75)	24.0 (609.6)	29-1/2 (749.3)
B (width)	15.0 (381)	19.0 (482.6)	22-1/2 (571.5)
C (depth)	20-3/4 (527.05)	20-5/8 (523.9)	20-1/2 (520.7)
Weight	21-1/2 (9.75)	31-1/2 (14.29)	38-1/2 (17.46)
Shipping (boxed) Dimensions, in. (mm) and Weight, lb. (kg)			
A (height)	20-1/4 (514.35)	25-3/4 (654.05)	32.0 (812.8)
B (width)	17-1/8 (434.98)	20-1/2 (520.7)	25-3/8 (645.8)
C (depth)	25-5/8 (650.88)	25-3/4 (654.05)	26-1/4 (666.75)
Weight	28.0 (12.7))	38-1/2 (17.46)	48-1/2 (21.99)

Table 7 – Coil Match-up Chart

Cooling and Heat Pump Coil Kit Part Number	Indoor Unit	Outdoor Unit Tonnage	
		Air Conditioner	Heat Pump
NAVA53601CK	FEVB*24*	1.5 - 2	1.5 - 2
NAVA53601CK	FEVB*36*	2 - 3	2 - 3
NAVA54801CK	FEVB*48*	3 - 4	3 - 4
NAVA56001CK	FEVB*60*	3.5 - 5	3.5 - 5

NOTE: Reference the AHRI Directory for specific equipment combinations and performance.

Table 8 – Minimum CFM When Using Electric Heat

Unit Size	HEATER kW			
	10	12	15	20
FEVB002410*	625	—	—	—
FEVB003610*	625	—	—	—
FEVB003612*	—	850	—	—
FEVB003615*	—	—	850	—
FEVB004815*	—	—	850	—
FEVB006020*	—	—	—	1050

Note: Speed Tap 4 (white wire) is used for electric heat only. White wire must remain on tap 4.

Table 9 – Estimated Sound Power Level (dB)*

SIZE	CONDITIONS		OCTAVE BAND CENTER FREQUENCY						
	CFM	Ext Static Pressure	63	125	250	500	1000	2000	4000
24	700	0.50	72.0	68.0	64.0	61.0	59.0	57.0	53.0
36	1050	0.50	73.8	69.8	65.8	62.8	60.8	58.8	54.8
48	1400	0.50	75.0	71.0	67.0	64.0	62.0	60.0	56.0
60	1750	0.50	76.0	72.0	68.0	65.0	63.0	61.0	57.0

*. Estimated sound power levels have been derived using the method described in the 1987 ASHRAE HVAC Systems & Applications Handbook, Chapter 52, p. 52.7.

Table 10 – Electrical Data for Units

MODEL NO.	MTR HP	MTR FLA	VOLTS/PH/HZ	HEAT PACK INSTALLED	Single Circuit			Dual Circuit					
					HEATER AMPS	MCA	MOCP	HEATER AMPS	MCA	MOCP	HEATER AMPS	MCA	MOCP
								L1/L2	L1/L2	L1/L2	L3/L4	L3/L4	L3/L4
					208V/230V			208V/230V			208V/230V		
FEVB002410	1/3	2.9	208/230/1/60	MEHC10BKH*	35.6/39.4	48.1/52.9	50/60	N/A	N/A	N/A	N/A	N/A	N/A
FEVB003610	1/2	4.2	208/230/1/60	MEHC10BKH*	35.6/39.4	49.8/54.5	50/60	N/A	N/A	N/A	N/A	N/A	N/A
FEVB003612	1/2	4.2	208/230/1/60	MEHC12BKH*	42.7/47.5	58.6/64.6	60/70	28.5/31.7	40.9/44.9	45/45	14.3/15.8	17.9/19.8	20/20
FEVB003615	1/2	4.2	208/230/1/60	MEHC15BKH*	53.4/59.1	72.0/79.1	80/80	35.6/39.4	49.8/54.5	50/60	17.8/19.7	22.3/24.6	25/25
FEVB004815	3/4	6.1	208/230/1/60	MEHC15BKH*	53.4/59.1	74.4/81.5	80/90	35.6/39.4	52.1/56.9	60/60	17.8/19.7	22.3/24.6	25/25
FEVB006020	3/4	6.1	208/230/1/60	MEHC20BKH*	71.2/78.8	96.6/106.1	100/110	35.6/39.4	52.1/56.9	60/60	35.6/39.4	44.5/49.3	45/50

MCA = Minimum Ampacity

MOCP = Maximum Overcurrent Protection

Table 11 – Electric Heat Btuh Details

Electric Furnace (Model, kW)	24, 10kW	36, 10kW	36, 12kW	36, 15kW	48, 15kW	60, 20kW
Heating Output @ 240V, Btuh*	34130	34130	40945	51180	51180	68240

*Heating output rated at 240V. For outputs at other voltages follow the following factors: x 0.92 (230V), x 0.75 (208V).

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Table 12 – Airflow Performance - without Cooling Coil (CFM)

Model & Size	Blower Speed	Total Static (inches of water column)									
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
FEVB 024	Tap 5	1099	1079	1058	1040	1007	970	924	844	757	702
	Tap 4	1016	995	975	949	903	853	768	684	639	588
	Tap 3	1016	995	975	949	903	853	768	684	639	588
	Tap 2	934	913	893	852	796	713	622	577	531	486
	Tap 1	801	783	739	670	557	507	454	408	363	315
FEVB 036 10KW	Tap 5	1559	1535	1514	1486	1459	1430	1404	1378	1346	1311
	Tap 4	1476	1451	1424	1390	1360	1333	1304	1273	1241	1210
	Tap 3	1476	1451	1424	1390	1360	1333	1304	1273	1241	1210
	Tap 2	1318	1284	1250	1220	1190	1157	1120	1085	1050	987
	Tap 1	1132	1097	1058	1018	979.2	940	896.5	819.7	761.1	701.6
FEVB 036 12/15KW	Tap 5	1549	1525	1495	1464	1436	1411	1385	1360	1331	1303
	Tap 4	1458	1428	1399	1372	1347	1321	1293	1262	1230	1201
	Tap 3	1458	1428	1399	1372	1347	1321	1293	1262	1230	1201
	Tap 2	1303	1267	1237	1208	1179	1148	1113	1080	1036	969.9
	Tap 1	1120	1082	1046	1009	971.4	933.5	879.3	804.9	748.4	696.1
FEVB 048	Tap 5	2088	2054	2013	1974	1931	1891	1849	1806	1764	1717
	Tap 4	1887	1842	1799	1757	1712	1667	1620	1569	1516	1465
	Tap 3	1887	1842	1799	1757	1712	1667	1620	1569	1516	1465
	Tap 2	1685	1635	1587	1539	1487	1433	1377	1317	1262	1200
	Tap 1	1518	1464	1409	1354	1295	1230	1173	1109	1032	968.9
FEVB 060	Tap 5	2212	2175	2137	2100	2059	2021	1983	1942	1901	1863
	Tap 4	2212	2175	2137	2100	2059	2021	1983	1942	1901	1863
	Tap 3	2212	2175	2137	2100	2059	2021	1983	1942	1901	1863
	Tap 2	1982	1938	1895	1853	1810	1767	1723	1681	1635	1592
	Tap 1	1656	1609	1560	1511	1459	1408	1356	1304	1249	1191

Notes:

1. Airflow based upon dry coil at 230V with factory-approved filter and electric heater; airflow at 208V is approximately the same as 230V because the ECM motor is a constant torque motor. The torque doesn't drop off at the speeds the motor operates.
2. To avoid potential for condensate blowing out of drain pan prior to making drain trap, return static pressure must be less than 0.40 in. wc.
3. Airflow above 400 cfm/ton on 4800 - 6000 size could result in condensate blowing off coil or splashing out of drain pan.

Table 13 – Airflow Performance - with Accessory Cooling Coil (CFM)

Model & Size	Blower Speed	Total Static (inches of water column)									
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
FEVB 024	Tap 5	1032	984	953	901	847	797	748	720	687	645
	Tap 4	930	898	846	781	741	690	654	620	586	554
	Tap 3	930	898	846	781	741	690	654	620	586	554
	Tap 2	871	817	767	708	657	616	573	537	502	472
	Tap 1	732	675	608	540	512	470	436	394	351	317
FEVB 036 10KW	Tap 5	1457	1431	1404	1376	1345	N/A	N/A	N/A	N/A	N/A
	Tap 4	1377	1349	1320	1291	1261	1226	1186	1142	1099	1048
	Tap 3	1377	1349	1320	1291	1261	1226	1186	1142	1099	1048
	Tap 2	1221	1189	1157	1123	1084	1033	987	933.7	886	848.7
	Tap 1	1044	1008	969.4	916.7	858.2	804.8	755.2	713.6	671.5	634.9
FEVB 036 12 / 15KW	Tap 5	1385	1364	1341	1314	1291	1255	N/A	N/A	N/A	N/A
	Tap 4	1310	1281	1258	1231	1205	1179	1153	1132	1112	1073
	Tap 3	1310	1281	1258	1231	1205	1179	1153	1132	1112	1073
	Tap 2	1160	1133	1104	1075	1050	1023	999	964	899	851
	Tap 1	999	970	936	905	875	831	755	704	672	631
FEVB 048	Tap 5	1896	1853	1821	1795	1760	1737	1702	1670	1665	1619
	Tap 4	1711	1673	1643	1607	1570	1549	1509	1513	1446	1411
	Tap 3	1711	1673	1643	1607	1570	1549	1509	1513	1446	1411
	Tap 2	1547	1504	1466	1416	1388	1369	1324	1290	1248	1200
	Tap 1	1401	1347	1312	1269	1232	1186	1142	1097	1052	989
FEVB 060	Tap 5	2141	2102	2063	2017	1967	1953	1902	1855	1824	1766
	Tap 4	2141	2102	2063	2017	1967	1953	1902	1855	1824	1766
	Tap 3	2141	2102	2063	2017	1967	1953	1902	1855	1824	1766
	Tap 2	1901	1868	1825	1785	1737	1710	1662	1620	1584	1521
	Tap 1	1583	1557	1499	1451	1392	1358	1313	1259	1194	1138

Notes:

1. Airflow based upon dry coil at 230V with factory-approved filter and electric heater; airflow at 208V is approximately the same as 230V because the ECM motor is a constant torque motor. The torque doesn't drop off at the speeds the motor operates.
2. To avoid potential for condensate blowing out of drain pan prior to making drain trap, return static pressure must be less than 0.40 in. wc.
3. Airflow above 400 cfm/ton on 4800 - 6000 size could result in condensate blowing off coil or splashing out of drain pan.

Table 14 – Airflow Performance - without Cooling Coil (CFM)

Model & Size	Blower Speed	Total Static (inches of water column)									
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
FEVB 024	Tap 5	1099	1079	1058	1040	1007	970	924	844	757	702
	Tap 4	1016	995	975	949	903	853	768	684	639	588
	Tap 3	1016	995	975	949	903	853	768	684	639	588
	Tap 2	934	913	893	852	796	713	622	577	531	486
	Tap 1	801	783	739	670	557	507	454	408	363	315
FEVB 036 10KW	Tap 5	1559	1535	1514	1486	1459	1430	1404	1378	1346	1311
	Tap 4	1476	1451	1424	1390	1360	1333	1304	1273	1241	1210
	Tap 3	1476	1451	1424	1390	1360	1333	1304	1273	1241	1210
	Tap 2	1318	1284	1250	1220	1190	1157	1120	1085	1050	987
	Tap 1	1132	1097	1058	1018	979.2	940	896.5	819.7	761.1	701.6
FEVB 036 12/15KW	Tap 5	1549	1525	1495	1464	1436	1411	1385	1360	1331	1303
	Tap 4	1458	1428	1399	1372	1347	1321	1293	1262	1230	1201
	Tap 3	1458	1428	1399	1372	1347	1321	1293	1262	1230	1201
	Tap 2	1303	1267	1237	1208	1179	1148	1113	1080	1036	969.9
	Tap 1	1120	1082	1046	1009	971.4	933.5	879.3	804.9	748.4	696.1
FEVB 048	Tap 5	2088	2054	2013	1974	1931	1891	1849	1806	1764	1717
	Tap 4	1887	1842	1799	1757	1712	1667	1620	1569	1516	1465
	Tap 3	1887	1842	1799	1757	1712	1667	1620	1569	1516	1465
	Tap 2	1685	1635	1587	1539	1487	1433	1377	1317	1262	1200
	Tap 1	1518	1464	1409	1354	1295	1230	1173	1109	1032	968.9
FEVB 060	Tap 5	2212	2175	2137	2100	2059	2021	1983	1942	1901	1863
	Tap 4	2212	2175	2137	2100	2059	2021	1983	1942	1901	1863
	Tap 3	2212	2175	2137	2100	2059	2021	1983	1942	1901	1863
	Tap 2	1982	1938	1895	1853	1810	1767	1723	1681	1635	1592
	Tap 1	1656	1609	1560	1511	1459	1408	1356	1304	1249	1191

- Notes:
- 1. Airflow based upon dry coil at 230V with factory-approved filter and electric heater; airflow at 208V is approximately the same as 230V because the ECM motor is a constant torque motor. The torque doesn't drop off at the speeds the motor operates.
 - 2. To avoid potential for condensate blowing out of drain pan prior to making drain trap, return static pressure must be less than 0.40 in. wc.
 - 3. Airflow above 400 cfm/ton on 4800 - 6000 size could result in condensate blowing off coil or splashing out of drain pan.

Table 15 – Accessories

ITEM	ACCESSORY PART NO.*	FAN COIL SIZE USED WITH
Sub-base Multi-pack Kits† (11 pieces per box)	NAMA01711SB (17" downflow)	24, 36
	NAMA02111SB (21" downflow)	48
	NAMA02411SB (24" downflow)	60
Filter	See Table 4 for sizes.	
17" Upflow Stand for FEVB 24 and 36	NAUA00101US	24, 36
21" Upflow Stand for FEVB0048	NAUA00201US	48
24" Upflow Stand for FEVB0060	NAUA00301US	60

*. Factory authorized and listed, field-installed.
†. Required for downflow installations.