

**R5A4S
Single-Stage Air Conditioner
with R-454B Refrigerant
1.5 to 5 Tons**

Product Specifications



This unit has been designed utilizing non-ozone depleting, low global warming potential R-454B refrigerant.

Air conditioners with R-454B refrigerant provide a collection of features unmatched by any other family of equipment.

NOTE: Ratings contained in this document are subject to change at any time. Always refer to the AHRI directory (www.ahridirectory.org) for the most up-to-date ratings information.

Features / Benefits

Efficiency

- 13.4 - 16.0 SEER2 / 11.0 – 13.5 EER2
- Indoor air quality accessories available

Comfort

- System supports programmable or standard thermostat controls

Sound

- Sound levels as low as 72 dBA

Reliability

- Non-ozone depleting, low global warming potential R-454B refrigerant
- Scroll compressor
- Internal pressure relief valve
- Internal thermal overload
- Filter drier

Durability

Protection Package:

- Solid, durable sheet metal construction
- Dense wire coil guard

Applications

- Long-line – up to 250 feet (76.20 m) total equivalent length, up to 200 feet (60.96 m) condenser above evaporator, or up to 80 ft. (24.4 m) evaporator above condenser (See Long Line Guide for more information.)
- Low ambient cooling (down to 0°F / -18°C) with approved low ambient accessory kits.

Limited Warranty

- 5-year parts limited warranty (including compressor and coil)
- 10-year parts limited warranty (including compressor and coil) with timely registration*
 - Equipment must be registered within 90 days of original installation, except in jurisdictions where warranty benefits cannot be conditioned on registration.
- * Applies to original purchaser/homeowner and not available to subsequent owners except in jurisdictions where applicable laws dictate otherwise.

See warranty certificate for complete details and restrictions.

MODEL NUMBER NOMENCLATURE

| | | | | | | | | | | |
|-------------------------------|----------------------------------|-----------------------|-------------------------------|--|--|--------------------------------|---|---|-------------------------------|--|
| R | 5 | A | 4 | S | 18 | A | K | A | N | A |
| Brand R = Maratherm | Refrigerant 5 = R-454B | Type A = AC | SEER2 4= 13.4 SEER2 | OD Design Type S= Single Stage | Nominal Capacity 18 = 1-1/2 Tons 24 = 2 Tons 30 = 2-1/2 Tons 36 = 3 Tons 42 = 3-1/2 Tons 48 = 4 Tons 60 = 5 Tons | Feature A = Standard | Voltage K = 208-230-1 or 208/230-1 | Special Feature A = Standard B = Compressor Electrical Rating Change | Region N = North AC | Major Series A = Initial Series |



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program For verification of certification for individual products, go to www.ahridirectory.org.

**AHRI RATINGS**

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory www.ahridirectory.org

Additional ratings and system combinations can be accessed via the Ratings Database here: [MarathermRatings](#)

CATALOG ORDERING NUMBERS

| Size | Model Number |
|------|--------------|
| 18 | R5A4S18AKANA |
| 24 | R5A4S24AKANA |
| 30 | R5A4S30AKANA |
| 36 | R5A4S36AKANA |
| 42 | R5A4S42AKANA |
| 48 | R5A4S48AKBNA |
| 60 | R5A4S60AKANA |

STANDARD FEATURES

| Features | 18 | 24 | 30 | 36 | 42 | 48 | 60 |
|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| R-454B Refrigerant | X | X | X | X | X | X | X |
| SEER2 (Range depending on indoor combination) | 13.4 - 16.0 | 13.4 - 16.0 | 13.4 - 16.0 | 13.4 - 15.5 | 13.4 - 16.0 | 13.4 - 15.2 | 13.4 - 15.0 |
| Scroll Compressor | X | X | X | X | X | X | X |
| Factory Supplied, Field Installed Filter Drier | X | X | X | X | X | X | X |
| Front Seating Service Valves | X | X | X | X | X | X | X |
| Internal Pressure Relief Valve | X | X | X | X | X | X | X |
| Internal Thermal Overload | X | X | X | X | X | X | X |
| Long Line Capability | X | X | X | X | X | X | X |
| Low Ambient Capability with Kit | X | X | X | X | X | X | X |

PHYSICAL DATA

| UNIT SIZE | 18 | 24 | 30 | 36 | 42 | 48 | 60 |
|------------------------------------|---|-------------|------------|-------------|-------------|-------------|-------------|
| COMPRESSOR TYPE | Scroll | | | | | | |
| REFRIGERANT | R-454B | | | | | | |
| Factory Charge lb (kg)* | 3.90 (1.77) | 3.90 (1.77) | 5.30 (2.4) | 4.90 (2.22) | 6.60 (2.99) | 7.10 (3.22) | 6.40 (2.90) |
| COND FAN | Forward Swept or Propeller Type, Direct Drive | | | | | | |
| Air Discharge | Vertical | | | | | | |
| Air Qty (CFM) | 1600 | 2100 | 2700 | 2800 | 3800 | 3000 | 4000 |
| Motor HP | 1/12 | 1/10 | 1/10 | 1/10 | 1/4 | 1/5 | 1/4 |
| Motor RPM | 1100 | 1100 | 825 | 825 | 1100 | 1100 | 1100 |
| COND COIL | | | | | | | |
| Face Area (Sq ft) | 9.7 | 13.1 | 17.2 | 15.1 | 21.5 | 15.1 | 17.2 |
| Fins per In. | 25 | 25 | 25 | 25 | 25 | 20 | 20 |
| Rows | 1 | 1 | 1 | 1 | 1 | 2 | 2 |
| Circuits | 4 | 4 | 4 | 4 | 6 | 6 | 8 |
| VALVE CONNECT. (In. ID) | | | | | | | |
| Vapor | 3/4 | 3/4 | 3/4 | 7/8 | 7/8 | 7/8 | 7/8 |
| Liquid | 3/8" | | | | | | |
| REFRIGERANT TUBES* (In. OD) | | | | | | | |
| Rated Vapor† | 5/8 | 3/4 | 3/4 | 7/8 | 7/8 | 7/8 | 1 1/8 |
| Rated Liquid Line‡ | 3/8" | | | | | | |

*.For 15 ft. lineset. Adjust per installation instructions. Refrigerant charge varies with indoor unit; refer to refrigerant charge label.

†.Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

‡.See Liquid Line Sizing For Cooling Only Systems with R-454B Refrigerant tables.

Note: See unit Installation Instruction for proper installation.

REFRIGERANT PIPING LENGTH LIMITATIONS

Liquid Line Sizing and Maximum Total Equivalent Lengths for Cooling Only Systems with R-454B Refrigerant:

The maximum allowable length of a residential split system depends on the liquid line diameter and vertical separation between indoor and outdoor units.

See Table below for liquid line sizing and maximum lengths :

**Table 1 – Maximum Total Equivalent Length
Outdoor Unit BELOW Indoor Unit**

| Size | Liquid Line Connection | Liquid Line Diam. (in.) w/ TXV | AC with R-454B Refrigerant Maximum Total Equivalent Length*: Outdoor unit BELOW Indoor Vertical Separation ft (m) | | | | | | | | |
|-------|------------------------|--------------------------------|---|-------------------|--------------------|--------------------|---------------------|----------------------|----------------------|----------------------|----------------------|
| | | | 0-5 (0-1.5) | 6-10 (1.8-3.0) | 11-20 (3.4-6.1) | 21-30 (6.4-9.1) | 31-40 (9.4-12.2) | 41-50 (12.5-15.2) | 51-60 (15.5-18.3) | 61-70 (18.6-21.3) | 71-80 (21.6-24.4) |
| 18000 | 3/8 | 1/4 | 150 | 150 | 125 | 100 | 100 | 75 | -- | -- | -- |
| | | 5/16 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 225 | 150 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 24000 | 3/8 | 1/4 | 75 | 75 | 75 | 50 | 50 | -- | -- | -- | -- |
| | | 5/16 | 250 | 250 | 250 | 250 | 250 | 225 | 175 | 125 | 100 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 30000 | 3/8 | 1/4 | 30 | -- | -- | -- | -- | -- | -- | -- | -- |
| | | 5/16 | 175 | 225 | 200 | 175 | 125 | 100 | 75 | -- | -- |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 36000 | 3/8 | 5/16 | 175 | 150 | 150 | 100 | 100 | 100 | 75 | -- | -- |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 42000 | 3/8 | 5/16 | 125 | 100 | 100 | 75 | 75 | 50 | -- | -- | -- |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 150 |
| 48000 | 3/8 | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 230 | 160 | -- |
| 60000 | 3/8 | 3/8 | 250 | 250 | 250 | 225 | 190 | 150 | 110 | -- | -- |

*.Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

-- = Outside acceptable range

**Table 2 – Maximum Total Equivalent Length
Outdoor Unit ABOVE Indoor Unit**

| Size | Liquid Line Connection | Liquid Line Diam. (in.) w/ TXV | AC with R-454B Refrigerant Maximum Total Equivalent Length*: Outdoor unit ABOVE Indoor Vertical Separation ft (m) | | | | | | | |
|-------|------------------------|--------------------------------|---|---------------------|----------------------|-----------------------|------------------------|------------------------|------------------------|------------------------|
| | | | 25 (7.6) | 26-50 (7.9-15.2) | 51-75 (15.5-22.9) | 76-100 (23.2-30.5) | 101-125 (30.8-38.1) | 126-150 (38.4-45.7) | 151-175 (46.0-53.3) | 176-200 (53.6-61.0) |
| 18000 | 3/8 | 1/4 | 175 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| | | 5/16 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 24000 | 3/8 | 1/4 | 100 | 125 | 175 | 200 | 225 | 250 | 250 | 250 |
| | | 5/16 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 30000 | 3/8 | 1/4 | 30 | -- | -- | -- | -- | -- | -- | -- |
| | | 5/16 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 36000 | 3/8 | 5/16 | 225 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 42000 | 3/8 | 5/16 | 175 | 200 | 250 | 250 | 250 | 250 | 250 | 250 |
| | | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 48000 | 3/8 | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| 60000 | 3/8 | 3/8 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |

*.Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

-- = Outside acceptable range

Table 3 – Refrigerant Charge Adjustments

| Liquid Line Size | R-454B Charge oz/ft (g/m) |
|------------------|--|
| 3/8 | 0.60 (17.74) (Factory charge for lineset = 9 oz / 266.16 g) |
| 5/16 | 0.40 (11.83) |
| 1/4 | 0.27 (7.98) |

Units are factory charged for 15 ft (4.6 m) of 3/8” liquid line. The factory charge for 3/8” lineset 9 oz. (266.16 g). When using other length or diameter liquid lines, charge adjustments are required per the chart above.

Charging Formula:

$[(\text{Lineset oz/ft} \times \text{total length}) - (\text{factory charge for lineset})] = \text{charge adjustment}$

Example 1: System has 15 ft of lineset* using existing 1/4” liquid line. What charge adjustment is required?

Formula: $(.27 \text{ oz/ft} \times 15\text{ft}) - (9 \text{ oz}) = (-4.95) \text{ oz.}$

Net result is to remove 4.95 oz of refrigerant from the system

Example 2: System has 45 ft of existing 5/16” liquid line. What is the charge adjustment?

Formula: $(.40 \text{ oz/ft.} \times 45\text{ft}) - (9 \text{ oz.}) = 9 \text{ oz.}$

Net result is to add 9 oz of refrigerant to the system

NOTE: Conditions must be favorable for charging by subcooling method. Indoor temperature must be 70°F to 80°F (21°C to 27°C), and outdoor temperature must be 70°F to 100°F (21°C to 38°C). If outside these conditions, adjust charge for long linesets by weigh-in method.

* When applicable. Refer to Physical Data Table in this PD and to the Installation Instructions for more information.

Long Line Applications

An application is considered "Long Line" when the total equivalent tubing length exceeds 80 ft or when there is more than 35 ft. vertical separation between indoor and outdoor units. These applications require additional accessories and system modifications for reliable system operation. The maximum allowable total equivalent length is 250 ft. The maximum vertical separation is 200 ft. when outdoor unit is above indoor unit, and 80 ft. when the outdoor unit is below the indoor unit. Refer to Accessory Usage Guideline below for required accessories. See Long-Line Application Guideline for required piping and system modifications. Also, refer to table below for acceptable vapor tube diameters to minimize the cooling capacity loss.

VAPOR LINE SIZING AND COOLING CAPACITY LOSS

Acceptable vapor line diameters provide adequate oil return to the compressor while avoiding excessive capacity loss. The suction line diameters shown in the chart below are acceptable for AC systems with R-454B refrigerant:

Table 4 – Vapor Line Sizing and Cooling Capacity Losses — R-454B Refrigerant 1-Stage Air Conditioner Applications

| Unit Nominal Size (kBtu) | Maximum Liquid Line Diameters (In. OD) | Acceptable Vapor Line Diameters (In. OD) | Cooling Capacity Loss (%) Total Equivalent Line Length ft. (m) 1-Stage AC with R-454B Refrigerant | | | | | | | | |
|--------------------------|--|--|---|----------------------|-----------------------|--|------------------------|------------------------|------------------------|------------------------|------------------------|
| | | | Total Equivalent Line Length (ft) | | | | | | | | |
| | | | Standard Application | | | Long Line Application Requires Accessories | | | | | |
| | | | 26-50 (7.9-15.2) | 51-80 (15.5-24.4) | 81-100 (24.7-30.5) | 101-125 (30.8-38.1) | 126-150 (38.4-45.7) | 151-175 (46.0-53.3) | 176-200 (53.6-61.0) | 201-225 (61.3-68.6) | 226-250 (68.9-76.2) |
| 18 | 3/8 | 1/2 | 2 | 5 | 6 | 8 | 10 | 12 | 13 | 15 | 16 |
| | | 5/8 | 1 | 2 | 3 | 4 | 4 | 5 | 6 | 7 | 7 |
| | | 3/4 | 1 | 1 | 2 | 2 | 3 | 3 | 3 | 4 | 4 |
| 24 | 3/8 | 5/8 | 1 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| | | 3/4 | 1 | 1 | 2 | 3 | 3 | 4 | 4 | 5 | 5 |
| | | 7/8 | 0 | 1 | 2 | 2 | 2 | 3 | 3 | 4 | 4 |
| 30 | 3/8 | 5/8 | 2 | 4 | 5 | 6 | 8 | 9 | 10 | 11 | 13 |
| | | 3/4 | 1 | 2 | 2 | 3 | 4 | 4 | 5 | 6 | 6 |
| | | 7/8 | 1 | 1 | 2 | 2 | 2 | 3 | 3 | 4 | 4 |
| 36 | 3/8 | 5/8 | 2 | 4 | 6 | 7 | 9 | 10 | 12 | 13 | 14 |
| | | 3/4 | 1 | 2 | 3 | 3 | 4 | 5 | 6 | 6 | 7 |
| | | 7/8 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 |
| 42 | 3/8 | 3/4 | 1 | 3 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| | | 7/8 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 6 |
| | | 1 1/8 | 0 | 1 | 1 | 1 | 2 | 2 | 2 | 3 | 3 |
| 48 | 3/8 | 3/4 | 1 | 3 | 4 | 5 | 6 | 8 | 9 | 10 | 11 |
| | | 7/8 | 1 | 2 | 2 | 3 | 4 | 4 | 5 | 6 | 6 |
| | | 1 1/8 | 0 | 1 | 1 | 1 | 2 | 2 | 2 | 3 | 3 |
| 60 | 3/8 | 3/4 | 2 | 4 | 5 | 7 | 8 | 10 | 11 | 12 | 14 |
| | | 7/8 | 1 | 2 | 3 | 4 | 5 | 6 | 6 | 7 | 8 |
| | | 1 1/8 | 0 | 0 | 0 | 1 | 1 | 1 | 2 | 2 | 3 |

Applications in this area may be long line and may have height restrictions. See the Residential Piping and Long Line Guideline.

ACCESSORIES

| KIT NUMBER | KIT NAME | 18 | 24 | 30 | 36 | 42 | 48 | 60 |
|-------------------|--|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| NASA00201FS | FRZ THERM KIT | X | X | X | X | X | X | X |
| NASA001TD | TIME DELAY KIT (90 second TDR) | X | X | X | X | X | X | X |
| NASA00201TD | TIME DELAY KIT (30 second TDR) | X | X | X | X | X | X | X |
| NASA401LA | LOW AMBIENT COOLING KIT | X | X | X | X | X | X | X |
| NASA012SC | HARD START KIT (208-230-1 units only) | X | X | X | X | X | X | X |
| NASA014SC* | HARD START KIT | | | | | | X | X |
| NASA002AC | CYCLE PROTR KIT | X | X | X | X | X | X | X |
| NASA00201SF | SPRT FEET KIT | X | X | X | X | X | X | X |
| NASA401LS† | SOL VALVE KIT | X | X | X | X | X | X | X |
| NASA00201WS | WINTER ST KIT | X | X | X | X | X | X | X |
| NASA406PS | LOW PRESSURE SW KIT | X | X | X | X | X | X | X |
| NASA407PS | HIGH PRESSURE SW KIT | X | X | X | X | X | X | X |
| NASA00601CH | CRKC HTR KIT | X | X | X | X | | | |
| NASA00501CH | CRKC HTR KIT | | | | | X | X | X |
| NASA00201SJ | SOUND BLKT KIT | X | X | X | X | | | |
| NASA00101SJ | SOUND BLKT KIT | | | | | X | X | X |

*.Only use on models that have a "C" in position 15 of the 16 digit model number.

†.Do not use hard shutoff TXV with liquid solenoid valve

X = Accessory

ACCESSORY USAGE GUIDELINE

| ACCESSORY | REQUIRED FOR LOW-AMBIENT COOLING APPLICATIONS (Below 55°F/12.8°C) | REQUIRED FOR LONG LINE APPLICATIONS* | REQUIRED FOR SEA COAST APPLICATIONS (Within 2 miles/3.22 km) |
|---|--|---|---|
| Ball Bearing Fan Motor | Standard | Standard | Standard |
| Compressor Start Assist Capacitor and Relay | Yes | Yes | No |
| Crankcase Heater | Yes | Yes | No |
| Evaporator Freeze Thermostat | Yes | No | No |
| Liquid Line Solenoid Valve | No | No | No |
| Low-Ambient Pressure Switch | Yes | No | No |
| Support Feet | Recommended | No | Recommended |
| Winter Start Control | Yes [†] | No | No |

*.For tubing set lengths between 80 and 200 ft. (24 and 61 m) horizontal or 35 ft. (10.7 m) vertical differential (total equivalent length), refer to the Residential Split-System Long Line Application Guideline.

†.Required if Low Pressure Switch is factory or field installed.

Accessory Description and Usage

1. Ball-Bearing Fan Motor

A fan motor with ball bearings which permits speed reduction while maintaining bearing lubrication.

2. Compressor Start Assist - Capacitor and Relay

Start capacitor and relay gives a "hard" boost to compressor motor at each start up.

Usage Guideline:

Required for single-phase scroll compressors in the following applications:

Long line

Low ambient cooling

Suggested for all single-phase compressors in areas with a history of low voltage problems.

3. Crankcase Heater

An electric resistance heater which mounts to the base of the compressor to keep the lubricant warm during off cycles. Improves compressor lubrication on restart and minimizes the chance of liquid slugging.

Usage Guideline:

Required in low ambient cooling applications.

Required in long line applications.

Suggested in all commercial applications.

4. Cycle Protector

The cycle protector is designed to prevent compressor short cycling. This control provides an approximate 5-minute delay after power to the compressor has been interrupted for any reason, including power outage, protector control trip, thermostat jiggling, or normal cycling.

5. Evaporator Freeze Thermostat

An SPST temperature-actuated switch that stops unit operation when evaporator reaches freeze-up conditions.

Usage Guideline:

Required when low ambient kit has been added.

6. Low-Ambient Pressure Switch Kit

A long life pressure switch which is mounted to outdoor unit service valve. It is designed to cycle the outdoor fan motor in order to maintain head pressure within normal operating limits (approximately 100 psig to 225 psig). The control will maintain working head pressure at low-ambient temperatures down to 0°F (-18°C) when properly installed and also using wind baffles. Instructions provided in accessory kit.

Usage Guideline:

A Low-Ambient Pressure Switch must be used when cooling operation is used at outdoor temperatures below 55°F (12.8°C).

7. Sound Blanket

Wraparound sound reducing cover for the compressor. Reduces the sound level of the compressor.

Usage Guideline:

Suggested when unit is installed closer than 15 ft (4.57 m) to quiet areas, bedrooms, etc.

Suggested when unit is installed between two houses less than 10 ft (3 m) apart.

Accessory Description and Usage Continued

8. Support Feet

Four or five stick-on plastic feet that raise the unit 4 in. (101.6 mm) above the mounting pad. This allows sand, dirt, and other debris to be flushed from the unit base, minimizing corrosion.

Usage Guideline:

Suggested in the following applications:

- Coastal installations.
- Windy areas or where debris is normally circulating.
- Rooftop installations.
- For improved sound ratings.

9. Time-Delay Relay

An SPST delay relay which briefly continues operation of indoor blower motor to provide additional cooling after the compressor cycles off.

NOTE: Most indoor unit controls include this feature. For those that do not, use the guideline below.

Usage Guideline:

For improved efficiency ratings for certain combinations of indoor and outdoor units. Refer to AHRI Directory of Certified Product Performance (AHRI Directory).

When a Time-Delay Relay (TDR) is called for in the AHRI Directory, use a 30 second TDR for MicroChannel Indoor units and use a 90 second TDR for Round Tube Plate Fin Indoor units.

10. Winter Start Control

This control is designed to alleviate nuisance opening of the low-pressure switch by bypassing it for the first 3 minutes of operation.

ELECTRICAL DATA

| UNIT SIZE | V/PH | OPER VOLTS | | COMPR | | FAN | MCA | MAX FUSE or CKT BRK AMPS |
|-----------|-----------|------------|-----|-------|------|-----|------|--------------------------------|
| | | MAX | MIN | LRA | RLA | FLA | | |
| 18 | 208/230-1 | 253 | 197 | 41.5 | 8.3 | 0.4 | 10.8 | 15 |
| 24 | | | | 59.0 | 8.2 | 0.6 | 12.1 | 20 |
| 30 | | | | 67.0 | 12.5 | 0.6 | 16.2 | 25 |
| 36 | | | | 82.5 | 13.5 | 0.6 | 17.5 | 30 |
| 42 | | | | 109.0 | 14.7 | 1.4 | 19.8 | 30 |
| 48 | | | | 126.0 | 18.1 | 1.2 | 23.8 | 40 |
| 60 | | | | 157.0 | 23.7 | 1.5 | 31.1 | 50 |

FLA- Full Load Amps

LRA - Locked Rotor Amps

MCA- Minimum Circuit Amps

RLA- Rated Load Amps

NOTE: Control circuit is 24V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

A-Weighted Sound Power (dBA) without Sound Shield

| UNIT SIZE | STANDARD RATING | TYPICAL OCTAVE BAND SPECTRUM (without tone adjustment) | | | | | | |
|-----------|-----------------|--|-----|-----|------|------|------|------|
| | | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 18 | 72 | 66 | 66 | 66 | 66 | 62 | 60 | 55 |
| 24 | 74 | 72 | 68 | 71 | 70 | 65 | 61 | 57 |
| 30 | 72 | 67 | 68 | 68 | 68 | 63 | 60 | 54 |
| 36 | 74 | 68 | 69 | 69 | 69 | 65 | 62 | 61 |
| 42 | 74 | 71 | 71 | 70 | 70 | 65 | 62 | 59 |
| 48 | 78 | 73 | 76 | 74 | 73 | 68 | 66 | 64 |
| 60 | 74 | 73 | 73 | 71 | 70 | 64 | 62 | 59 |

A-Weighted Sound Power (dBA) with Accessory Sound Shield

| UNIT SIZE | STANDARD RATING | TYPICAL OCTAVE BAND SPECTRUM (without tone adjustment) | | | | | | |
|-----------|-----------------|--|-----|-----|------|------|------|------|
| | | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 18 | 70 | 68 | 66 | 66 | 65 | 61 | 58 | 53 |
| 24 | 74 | 74 | 68 | 71 | 71 | 65 | 60 | 56 |
| 30 | 71 | 68 | 67 | 68 | 67 | 62 | 59 | 52 |
| 36 | 71 | 68 | 68 | 68 | 67 | 62 | 59 | 57 |
| 42 | 73 | 72 | 71 | 70 | 69 | 64 | 60 | 56 |
| 48 | 77 | 76 | 75 | 73 | 72 | 67 | 64 | 62 |
| 60 | 73 | 75 | 74 | 71 | 69 | 63 | 60 | 56 |

NOTE: Tested in compliance with AHRI 270 but not listed with AHRI.

Charging Subcooling (TXV-Type Expansion Device)

| UNIT SIZE | REQUIRED SUBCOOLING (F) | Indoor |
|-----------|-------------------------|--------|
| 18 | 8 | TXV |
| 24 | 10 | |
| 30 | 9 | |
| 36 | 8 | |
| 42 | 8 | |
| 48 | 12 | |
| 60 | 10 | |



DIMENSIONS

| UNIT | SERIES | ELECTRICAL CHARACTERISTICS | | | | | A | | B | | C | | D | | E | | F | | G | | H | | I | | J | | K | | OPERATING WEIGHT | | SHIPPING WEIGHT | | SHIPPING LENGTH / WIDTH (Sq.) | | SHIPPING HEIGHT | |
|--------------|--------|----------------------------|---|---|---|---------|-------|----------|-------|-----|------|--------|-------|----------|-------|---------|-------|------|------|----|------|--------|-------|--------|-------|--------|-------|-----|------------------|-----|-----------------|---------|-------------------------------|---------|-----------------|----|
| | | Y | N | N | N | N | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | INCH | MM | Lbs | Kgs | Lbs | Kgs | INCH | MM | INCH | MM |
| R5A4S18**ANA | A | Y | N | N | N | 23 1/8 | 587.3 | 28 1/4 | 718.0 | 3/4 | 19.1 | 4 7/16 | 113.0 | 18 1/16 | 459.0 | 7 13/16 | 197.9 | 5/16 | 7.9 | 3 | 76.2 | 11 | 279.4 | 10 3/4 | 273.1 | 13 | 330.2 | 109 | 49.4 | 129 | 58.5 | 24 1/8 | 612.7 | 31 1/16 | 788.9 | |
| R5A4S24**ANA | A | Y | N | N | N | 25 3/4 | 654.0 | 31 11/16 | 804.3 | 3/4 | 19.1 | 4 7/16 | 113.0 | 21 1/4 | 539.9 | 9 1/8 | 231.3 | 5/16 | 7.9 | 3 | 76.2 | 13 | 330.2 | 12 1/2 | 317.5 | 13 | 330.2 | 120 | 54.4 | 140 | 63.5 | 26 3/4 | 679.9 | 34 7/16 | 875.2 | |
| R5A4S30**ANA | A | Y | N | N | N | 31 3/16 | 792.5 | 31 11/16 | 804.3 | 3/4 | 19.1 | 6 9/16 | 166.1 | 24 11/16 | 626.3 | 9 1/8 | 231.3 | 5/16 | 7.9 | 3 | 76.2 | 15 3/4 | 400.1 | 15 1/4 | 387.4 | 12 | 304.8 | 145 | 65.8 | 166 | 75.3 | 32 3/16 | 817.9 | 34 7/16 | 875.2 | |
| R5A4S36**ANA | A | Y | N | N | N | 31 3/16 | 792.5 | 28 1/4 | 718.0 | 7/8 | 22.2 | 6 9/16 | 166.1 | 24 11/16 | 626.3 | 9 1/8 | 231.3 | 5/16 | 7.9 | 3 | 76.2 | 15 1/4 | 387.4 | 14 3/4 | 374.7 | 10 | 254.0 | 133 | 60.3 | 153 | 69.4 | 32 3/16 | 817.9 | 31 1/16 | 788.9 | |
| R5A4S42**ANA | A | Y | N | N | N | 31 3/16 | 792.5 | 38 7/16 | 977.1 | 7/8 | 22.2 | 6 9/16 | 166.1 | 24 11/16 | 626.3 | 9 1/8 | 231.3 | 5/16 | 7.9 | 3 | 76.2 | 16 3/4 | 425.5 | 16 1/4 | 412.8 | 15 1/2 | 393.7 | 171 | 77.6 | 193 | 87.5 | 32 3/16 | 817.9 | 41 1/4 | 1048.0 | |
| R5A4S48**BNA | A | Y | N | N | N | 31 3/16 | 792.5 | 28 1/4 | 718.0 | 7/8 | 22.2 | 6 9/16 | 166.1 | 24 11/16 | 626.3 | 9 1/8 | 231.3 | 5/16 | 7.9 | 3 | 76.2 | 15 3/4 | 400.1 | 16 | 406.4 | 13 | 330.2 | 172 | 77.8 | 192 | 86.9 | 32 3/16 | 817.9 | 31 1/16 | 788.9 | |
| R5A4S60**ANA | A | Y | N | N | N | 31 3/16 | 792.5 | 31 11/16 | 804.3 | 7/8 | 22.2 | 6 9/16 | 166.1 | 24 11/16 | 626.3 | 9 1/8 | 231.3 | 5/16 | 7.9 | 3 | 76.2 | 16 | 406.4 | 16 | 406.4 | 22 | 558.8 | 184 | 83.5 | 204 | 92.5 | 32 3/16 | 817.9 | 34 7/16 | 875.2 | |

| | |
|--------------|---------------|
| 208-230-1-60 | Y=YES N=NO |
| 208-230-3-60 | |
| 460-3-60 | |
| 575-3-60 | |

NOTES:

1. CENTER OF GRAVITY

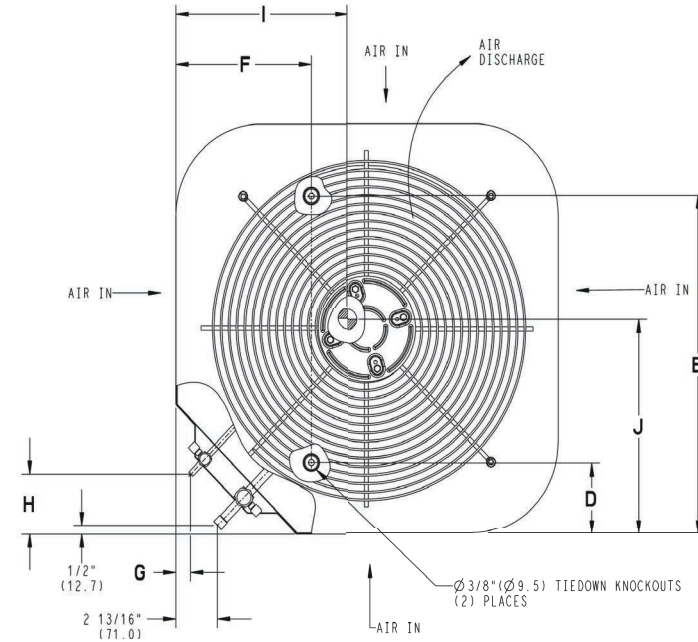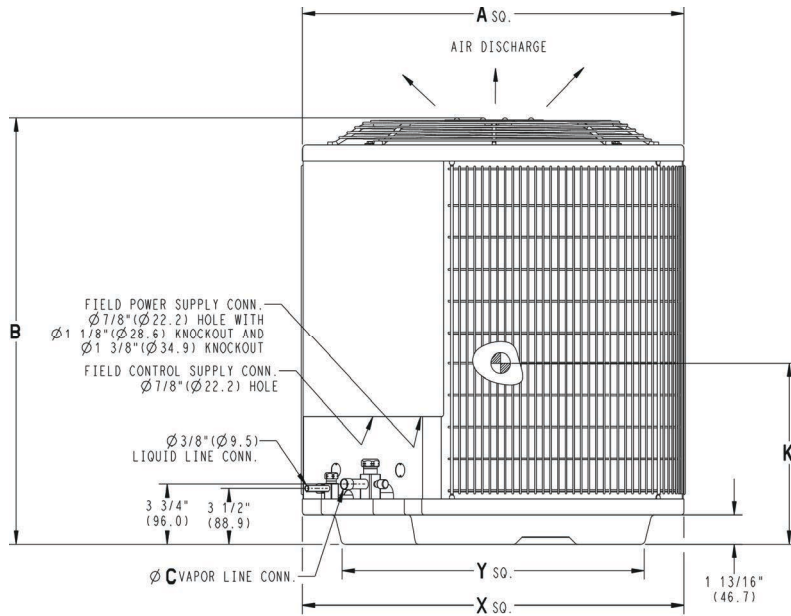


| UNIT SIZE | "X" | | "Y" | |
|----------------|--|-------|--|-------|
| | MINIMUM GROUND MOUNTING PAD APPLICATION DIMENSIONS | | MINIMUM ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS | |
| 18 | 23 1/8 | 587.3 | 17 7/8 | 454.6 |
| 24 | 25 3/4 | 654.0 | 20 7/16 | 518.5 |
| 30,36,42,48,60 | 31 3/16 | 792.5 | 22 15/16 | 583.2 |
| - | 35 | 889.0 | 26 3/4 | 679.7 |

NOTE: ALL DIMENSIONS IN INCH (MM)

U.S. ECCN: Not Subject to Regulation (N.S.R.)

CLEARANCES

Clearances (various examples)

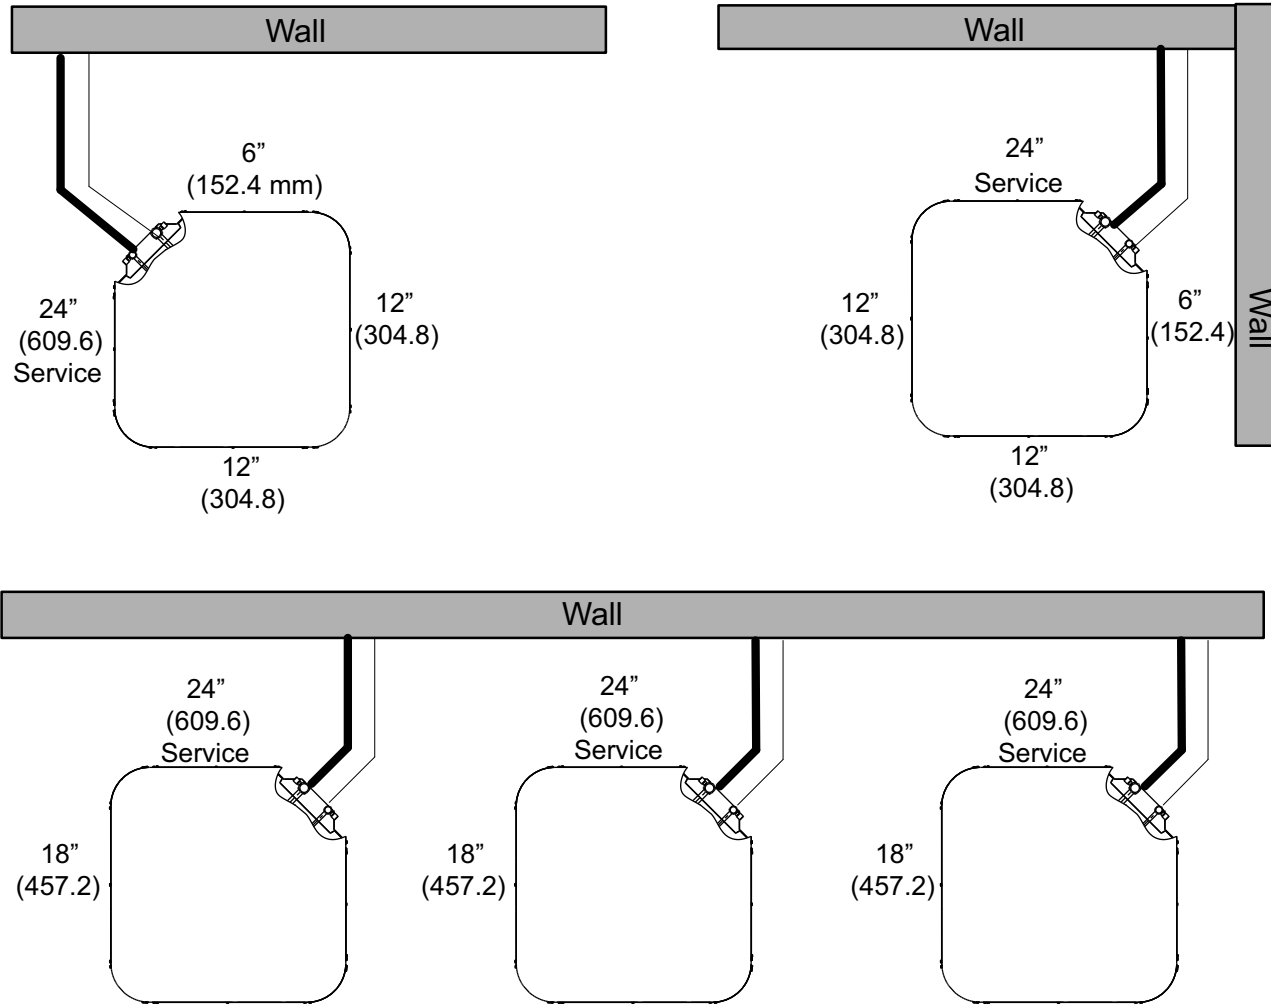

Note: Numbers in () = mm
Allow 48" above unit

IMPORTANT: When installing multiple units in an alcove, roof well, or partially enclosed area, ensure there is adequate ventilation to prevent re-circulation of discharge air.

DETAILED COOLING CAPACITIES#

| EVAPORATOR AIR | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | | | | | | | | | | | | | | | |
|--|-------------|---|-------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|------------|-----------------|----------------|-------|-----------------|----------------|-------|-----------------|--|
| | | 75 (23.9) | | | | 85 (29.4) | | | | 95 (35) | | | | 105 (40.6) | | | | 115 (46.1) | | | 125 (51.7) | |
| | | CFM | EWB | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | |
| Total | Sens‡ | | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | |
| R5A4S18AKANA Outdoor Section With EVD5X19M17A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | |
| 525 | 72 (22.2) | 20.18 | 10.2 | 1.02 | 19.49 | 9.92 | 1.14 | 18.71 | 9.6 | 1.27 | 17.89 | 9.27 | 1.42 | 16.92 | 8.86 | 1.59 | 15.82 | 8.4 | 1.79 | | | |
| | 67 (19.4) | 18.6 | 12.5 | 1.03 | 17.93 | 12.19 | 1.14 | 17.19 | 11.84 | 1.27 | 16.4 | 11.49 | 1.42 | 15.48 | 11.05 | 1.59 | 14.46 | 10.6 | 1.79 | | | |
| | 63 (17.2)†† | 17.27 | 12.04 | 1.03 | 16.58 | 11.68 | 1.15 | 15.89 | 11.35 | 1.28 | 15.1 | 10.95 | 1.42 | 14.25 | 10.54 | 1.59 | 13.25 | 10.04 | 1.79 | | | |
| | 62 (16.7) | 17.05 | 14.72 | 1.03 | 16.4 | 14.4 | 1.15 | 15.7 | 14.06 | 1.28 | 14.93 | 13.64 | 1.42 | 14.09 | 13.24 | 1.59 | 13.11 | 12.82 | 1.78 | | | |
| | 57 (13.9) | 16.43 | 16.43 | 1.03 | 15.9 | 15.9 | 1.15 | 15.34 | 15.34 | 1.28 | 14.69 | 14.69 | 1.42 | 13.97 | 13.97 | 1.59 | 13.19 | 13.19 | 1.78 | | | |
| 645 | 72 (22.2) | 20.78 | 10.77 | 1.06 | 20.06 | 10.48 | 1.18 | 19.25 | 10.15 | 1.32 | 18.37 | 9.79 | 1.47 | 17.36 | 9.38 | 1.64 | 16.22 | 8.92 | 1.84 | | | |
| | 67 (19.4) | 19.16 | 13.48 | 1.07 | 18.46 | 13.17 | 1.19 | 17.7 | 12.84 | 1.32 | 16.84 | 12.44 | 1.47 | 15.9 | 12.04 | 1.64 | 14.8 | 11.53 | 1.83 | | | |
| | 63 (17.2)†† | 17.81 | 12.95 | 1.08 | 17.11 | 12.62 | 1.19 | 16.36 | 12.23 | 1.32 | 15.55 | 11.86 | 1.47 | 14.63 | 11.4 | 1.64 | 13.58 | 10.87 | 1.83 | | | |
| | 62 (16.7) | 17.6 | 16.2 | 1.08 | 16.93 | 15.94 | 1.19 | 16.21 | 15.59 | 1.32 | 15.59 | 15.59 | 1.47 | 14.81 | 14.81 | 1.64 | 13.92 | 13.92 | 1.83 | | | |
| | 57 (13.9) | 17.42 | 17.42 | 1.08 | 16.86 | 16.86 | 1.19 | 16.27 | 16.27 | 1.32 | 15.57 | 15.57 | 1.47 | 14.79 | 14.79 | 1.64 | 13.91 | 13.91 | 1.83 | | | |
| 675 | 72 (22.2) | 20.9 | 10.9 | 1.07 | 20.15 | 10.59 | 1.2 | 19.35 | 10.28 | 1.33 | 18.45 | 9.91 | 1.48 | 17.42 | 9.49 | 1.65 | 16.3 | 9.04 | 1.85 | | | |
| | 67 (19.4) | 19.27 | 13.71 | 1.08 | 18.56 | 13.41 | 1.2 | 17.79 | 13.07 | 1.33 | 16.93 | 12.68 | 1.48 | 15.98 | 12.27 | 1.65 | 14.88 | 11.76 | 1.85 | | | |
| | 63 (17.2)†† | 17.91 | 13.16 | 1.09 | 17.19 | 12.8 | 1.2 | 16.45 | 12.45 | 1.34 | 15.64 | 12.07 | 1.48 | 14.68 | 11.63 | 1.66 | 13.64 | 11.08 | 1.85 | | | |
| | 62 (16.7) | 17.7 | 16.56 | 1.09 | 17.03 | 16.28 | 1.2 | 16.25 | 16.25 | 1.33 | 15.78 | 15.78 | 1.48 | 14.99 | 14.99 | 1.65 | 14.09 | 14.09 | 1.85 | | | |
| | 57 (13.9) | 17.65 | 17.65 | 1.09 | 17.08 | 17.08 | 1.2 | 16.43 | 16.43 | 1.33 | 15.76 | 15.76 | 1.48 | 14.97 | 14.97 | 1.65 | 14.08 | 14.08 | 1.85 | | | |
| R5A4S24AKANA Outdoor Section With EVD5X24M14A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | |
| 700 | 72 (22.2) | 27.29 | 13.2 | 1.35 | 26.15 | 12.74 | 1.52 | 24.92 | 12.27 | 1.7 | 23.63 | 11.77 | 1.89 | 22.28 | 11.25 | 2.1 | 20.92 | 10.74 | 2.35 | | | |
| | 67 (19.4) | 24.99 | 16.02 | 1.37 | 23.94 | 15.54 | 1.53 | 22.8 | 15.03 | 1.7 | 21.61 | 14.52 | 1.89 | 20.38 | 14.09 | 2.11 | 19.08 | 13.39 | 2.34 | | | |
| | 63 (17.2)†† | 23.18 | 15.47 | 1.39 | 22.19 | 14.98 | 1.54 | 21.14 | 14.49 | 1.7 | 20.02 | 13.97 | 1.89 | 18.85 | 13.42 | 2.1 | 17.65 | 12.86 | 2.34 | | | |
| | 62 (16.7) | 22.81 | 18.72 | 1.39 | 21.86 | 18.25 | 1.54 | 20.82 | 17.75 | 1.7 | 19.69 | 17.18 | 1.89 | 18.46 | 16.58 | 2.09 | 17.42 | 16.15 | 2.33 | | | |
| | 57 (13.9) | 21.94 | 21.94 | 1.39 | 21.15 | 21.15 | 1.54 | 20.32 | 20.32 | 1.7 | 19.42 | 19.42 | 1.89 | 18.43 | 18.43 | 2.09 | 17.49 | 17.49 | 2.34 | | | |
| 800 | 72 (22.2) | 27.83 | 13.63 | 1.39 | 26.64 | 13.17 | 1.56 | 25.36 | 12.68 | 1.73 | 23.99 | 12.16 | 1.93 | 22.61 | 11.64 | 2.15 | 21.17 | 11.08 | 2.39 | | | |
| | 67 (19.4) | 25.48 | 16.72 | 1.41 | 24.4 | 16.25 | 1.57 | 23.22 | 15.74 | 1.74 | 21.98 | 15.23 | 1.93 | 20.72 | 14.67 | 2.14 | 19.35 | 14.1 | 2.38 | | | |
| | 63 (17.2)†† | 23.65 | 16.12 | 1.42 | 22.65 | 15.66 | 1.58 | 21.55 | 15.15 | 1.74 | 20.37 | 14.61 | 1.93 | 19.17 | 14.17 | 2.15 | 17.85 | 13.43 | 2.36 | | | |
| | 62 (16.7) | 23.29 | 19.76 | 1.42 | 22.3 | 19.28 | 1.58 | 21.2 | 18.75 | 1.74 | 20.05 | 18.23 | 1.93 | 19.2 | 17.5 | 2.14 | 18.03 | 18.03 | 2.38 | | | |
| | 57 (13.9) | 22.73 | 22.73 | 1.43 | 21.94 | 21.94 | 1.58 | 21.05 | 21.05 | 1.74 | 20.05 | 20.05 | 1.93 | 19.03 | 19.03 | 2.14 | 18.05 | 18.05 | 2.38 | | | |
| 900 | 72 (22.2) | 28.23 | 14.01 | 1.42 | 27.02 | 13.55 | 1.59 | 25.69 | 13.05 | 1.77 | 24.28 | 12.53 | 1.97 | 22.83 | 11.96 | 2.19 | 21.39 | 11.45 | 2.43 | | | |
| | 67 (19.4) | 25.87 | 17.38 | 1.44 | 24.75 | 16.91 | 1.61 | 23.53 | 16.4 | 1.78 | 22.24 | 15.87 | 1.97 | 20.89 | 15.3 | 2.18 | 19.53 | 14.71 | 2.42 | | | |
| | 63 (17.2)†† | 24.04 | 16.76 | 1.46 | 23 | 16.28 | 1.61 | 21.85 | 15.76 | 1.78 | 20.62 | 15.2 | 1.97 | 19.36 | 14.61 | 2.18 | 18.08 | 14.06 | 2.42 | | | |
| | 62 (16.7) | 23.67 | 20.73 | 1.46 | 22.64 | 20.26 | 1.62 | 21.51 | 19.75 | 1.78 | 20.51 | 19.39 | 1.97 | 19.59 | 19.59 | 2.18 | 18.48 | 18.48 | 2.42 | | | |
| | 57 (13.9) | 23.43 | 23.43 | 1.46 | 22.58 | 22.58 | 1.62 | 21.64 | 21.64 | 1.78 | 20.6 | 20.6 | 1.97 | 19.55 | 19.55 | 2.18 | 18.46 | 18.46 | 2.42 | | | |

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

DETAILED COOLING CAPACITIES# (CONTINUED)

| EVAPORATOR AIR | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------|---|-------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|------------|--------------------|----------------|-------|-----------------|----------------|-------|-----------------|------------|--|--|--|
| | | 75 (23.9) | | | | 85 (29.4) | | | | 95 (35) | | | | 105 (40.6) | | | | 115 (46.1) | | | | 125 (51.7) | | | |
| | | CFM | EWB | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys-tem kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | | | | |
| Total | Sens‡ | | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | | | | |
| R5A4S30AKANA Outdoor Section With EVD5X31M17A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | | | | |
| 875 | 72 (22.2) | 34.43 | 16.25 | 1.74 | 32.99 | 15.71 | 1.93 | 31.44 | 15.13 | 2.15 | 29.76 | 14.52 | 2.39 | 28.03 | 13.87 | 2.67 | 26.24 | 13.21 | 3 | | | | | | |
| | 67 (19.4) | 31.39 | 19.69 | 1.72 | 30.05 | 19.11 | 1.92 | 28.64 | 18.51 | 2.13 | 27.14 | 17.88 | 2.37 | 25.54 | 17.22 | 2.65 | 23.88 | 16.53 | 2.97 | | | | | | |
| | 63 (17.2)†† | 29.03 | 18.97 | 1.71 | 27.78 | 18.4 | 1.91 | 26.47 | 17.8 | 2.12 | 25.06 | 17.17 | 2.35 | 23.59 | 16.51 | 2.62 | 22.03 | 15.8 | 2.94 | | | | | | |
| | 62 (16.7) | 28.56 | 23.02 | 1.71 | 27.34 | 22.45 | 1.9 | 26.04 | 21.84 | 2.11 | 24.66 | 21.21 | 2.35 | 23.22 | 20.62 | 2.62 | 21.72 | 19.94 | 2.94 | | | | | | |
| | 57 (13.9) | 27.5 | 27.5 | 1.71 | 26.51 | 26.51 | 1.9 | 25.47 | 25.47 | 2.11 | 24.36 | 24.36 | 2.35 | 23.16 | 23.16 | 2.62 | 21.91 | 21.91 | 2.94 | | | | | | |
| 950 | 72 (22.2) | 34.92 | 16.63 | 1.77 | 33.43 | 16.07 | 1.97 | 31.82 | 15.47 | 2.18 | 30.13 | 14.85 | 2.43 | 28.33 | 14.19 | 2.71 | 26.48 | 13.52 | 3.03 | | | | | | |
| | 67 (19.4) | 31.83 | 20.27 | 1.76 | 30.46 | 19.69 | 1.95 | 29 | 19.08 | 2.16 | 27.45 | 18.44 | 2.41 | 25.82 | 17.78 | 2.68 | 24.1 | 17.07 | 3 | | | | | | |
| | 63 (17.2)†† | 29.44 | 19.52 | 1.75 | 28.17 | 18.94 | 1.94 | 26.81 | 18.32 | 2.15 | 25.36 | 17.68 | 2.39 | 23.84 | 17.02 | 2.66 | 22.24 | 16.3 | 2.98 | | | | | | |
| | 62 (16.7) | 28.97 | 23.84 | 1.75 | 27.71 | 23.27 | 1.94 | 26.37 | 22.66 | 2.15 | 24.91 | 22.02 | 2.38 | 23.49 | 21.41 | 2.66 | 22.52 | 21.05 | 2.98 | | | | | | |
| | 57 (13.9) | 28.16 | 28.16 | 1.74 | 27.15 | 27.15 | 1.93 | 26.08 | 26.08 | 2.14 | 24.92 | 24.92 | 2.38 | 23.62 | 23.62 | 2.66 | 22.37 | 22.37 | 2.98 | | | | | | |
| 1125 | 72 (22.2) | 35.81 | 17.39 | 1.85 | 34.2 | 16.8 | 2.04 | 32.53 | 16.19 | 2.26 | 30.74 | 15.55 | 2.51 | 28.84 | 14.86 | 2.79 | 26.91 | 14.18 | 3.11 | | | | | | |
| | 67 (19.4) | 32.63 | 21.52 | 1.83 | 31.19 | 20.93 | 2.03 | 29.64 | 20.3 | 2.24 | 28.01 | 19.66 | 2.48 | 26.28 | 18.96 | 2.76 | 24.48 | 18.23 | 3.08 | | | | | | |
| | 63 (17.2)†† | 30.2 | 20.68 | 1.82 | 28.85 | 20.08 | 2.02 | 27.4 | 19.45 | 2.23 | 25.87 | 18.8 | 2.47 | 24.26 | 18.08 | 2.74 | 22.6 | 17.38 | 3.06 | | | | | | |
| | 62 (16.7) | 29.7 | 25.64 | 1.82 | 28.38 | 25.06 | 2.01 | 26.99 | 24.51 | 2.22 | 25.56 | 25.56 | 2.46 | 24.66 | 24.66 | 2.74 | 23.23 | 23.23 | 3.07 | | | | | | |
| | 57 (13.9) | 29.51 | 29.51 | 1.82 | 28.42 | 28.42 | 2.01 | 27.24 | 27.24 | 2.23 | 25.96 | 25.96 | 2.47 | 24.64 | 24.64 | 2.74 | 23.21 | 23.21 | 3.07 | | | | | | |
| R5A4S36AKANA Outdoor Section With EVD5X37M21A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1200 | 72 (22.2) | 41.91 | 21.48 | 2.14 | 40.21 | 20.83 | 2.36 | 38.4 | 20.14 | 2.61 | 36.49 | 19.42 | 2.89 | 34.35 | 18.62 | 3.21 | 32.08 | 17.77 | 3.58 | | | | | | |
| | 67 (19.4) | 38.31 | 26.61 | 2.13 | 36.76 | 25.95 | 2.35 | 35.1 | 25.24 | 2.6 | 33.26 | 24.48 | 2.88 | 31.3 | 23.61 | 3.2 | 29.21 | 22.79 | 3.57 | | | | | | |
| | 63 (17.2)†† | 35.56 | 25.65 | 2.13 | 34.12 | 24.97 | 2.35 | 32.52 | 24.24 | 2.59 | 30.8 | 23.46 | 2.87 | 28.96 | 22.64 | 3.2 | 27 | 21.76 | 3.57 | | | | | | |
| | 62 (16.7) | 34.95 | 31.69 | 2.13 | 33.53 | 31.02 | 2.34 | 31.97 | 30.32 | 2.59 | 30.27 | 29.54 | 2.87 | 29.24 | 29.24 | 3.2 | 27.56 | 27.56 | 3.57 | | | | | | |
| | 57 (13.9) | 34.6 | 34.6 | 2.13 | 33.44 | 33.44 | 2.34 | 32.11 | 32.11 | 2.59 | 30.71 | 30.71 | 2.87 | 29.2 | 29.2 | 3.2 | 27.56 | 27.56 | 3.57 | | | | | | |
| 1300 | 72 (22.2) | 42.32 | 21.95 | 2.18 | 40.57 | 21.28 | 2.4 | 38.72 | 20.58 | 2.65 | 36.77 | 19.85 | 2.93 | 34.59 | 19.04 | 3.25 | 32.29 | 18.19 | 3.62 | | | | | | |
| | 67 (19.4) | 38.69 | 27.39 | 2.18 | 37.11 | 26.73 | 2.4 | 35.4 | 26.02 | 2.64 | 33.53 | 25.24 | 2.92 | 31.52 | 24.41 | 3.24 | 29.38 | 23.53 | 3.62 | | | | | | |
| | 63 (17.2)†† | 35.93 | 26.37 | 2.17 | 34.45 | 25.69 | 2.39 | 32.81 | 24.96 | 2.63 | 31.05 | 24.18 | 2.91 | 29.17 | 23.33 | 3.24 | 27.17 | 22.45 | 3.61 | | | | | | |
| | 62 (16.7) | 35.3 | 32.83 | 2.17 | 33.87 | 32.19 | 2.39 | 32.33 | 31.8 | 2.63 | 31.26 | 31.26 | 2.91 | 29.71 | 29.71 | 3.24 | 28.04 | 28.04 | 3.61 | | | | | | |
| | 57 (13.9) | 35.31 | 35.31 | 2.17 | 34.1 | 34.1 | 2.39 | 32.74 | 32.74 | 2.63 | 31.29 | 31.29 | 2.91 | 29.73 | 29.73 | 3.24 | 28.02 | 28.02 | 3.61 | | | | | | |
| 1400 | 72 (22.2) | 42.66 | 22.38 | 2.23 | 40.87 | 21.7 | 2.45 | 38.99 | 21 | 2.69 | 36.98 | 20.26 | 2.97 | 34.78 | 19.43 | 3.29 | 32.44 | 18.58 | 3.66 | | | | | | |
| | 67 (19.4) | 39.01 | 28.15 | 2.22 | 37.38 | 27.47 | 2.44 | 35.64 | 26.75 | 2.68 | 33.74 | 25.97 | 2.96 | 31.69 | 25.13 | 3.28 | 29.52 | 24.24 | 3.65 | | | | | | |
| | 63 (17.2)†† | 36.23 | 27.06 | 2.21 | 34.73 | 26.38 | 2.43 | 33.05 | 25.64 | 2.68 | 31.25 | 24.85 | 2.96 | 29.33 | 24 | 3.28 | 27.3 | 23.1 | 3.65 | | | | | | |
| | 62 (16.7) | 35.63 | 33.99 | 2.21 | 34.21 | 33.65 | 2.43 | 33.34 | 33.34 | 2.68 | 31.75 | 31.75 | 2.96 | 30.2 | 30.2 | 3.28 | 28.46 | 28.46 | 3.65 | | | | | | |
| | 57 (13.9) | 35.93 | 35.93 | 2.21 | 34.66 | 34.66 | 2.43 | 33.3 | 33.3 | 2.68 | 31.79 | 31.79 | 2.96 | 30.17 | 30.17 | 3.28 | 28.4 | 28.4 | 3.65 | | | | | | |

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

DETAILED COOLING CAPACITIES# (CONTINUED)

| EVAPORATOR AIR | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------|---|-------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|------------|--------------------|----------------|-------|-----------------|----------------|-------|-----------------|------------|--|--|--|
| | | 75 (23.9) | | | | 85 (29.4) | | | | 95 (35) | | | | 105 (40.6) | | | | 115 (46.1) | | | | 125 (51.7) | | | |
| | | CFM | EWB | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys-tem kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | | | | |
| Total | Sens‡ | | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | | | | |
| R5A4S42AKANA Outdoor Section With EVD5X42M17A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1200 | 72 (22.2) | 47.75 | 23.97 | 2.45 | 45.93 | 23.24 | 2.7 | 44.01 | 22.47 | 2.99 | 41.95 | 21.65 | 3.32 | 39.77 | 20.8 | 3.69 | 37.38 | 19.87 | 4.11 | | | | | | |
| | 67 (19.4) | 43.39 | 29 | 2.44 | 41.74 | 28.25 | 2.7 | 40 | 27.46 | 2.99 | 38.14 | 26.63 | 3.31 | 36.06 | 25.72 | 3.9 | 33.97 | 24.82 | 4.09 | | | | | | |
| | 63 (17.2)†† | 40.09 | 27.95 | 2.44 | 38.53 | 27.18 | 2.69 | 36.92 | 26.4 | 2.98 | 35.16 | 25.59 | 3.31 | 33.34 | 24.72 | 3.67 | 31.33 | 23.75 | 4.07 | | | | | | |
| | 62 (16.7) | 39.38 | 33.91 | 2.44 | 37.87 | 33.16 | 2.69 | 36.28 | 32.37 | 2.98 | 34.59 | 31.54 | 3.3 | 32.75 | 30.65 | 3.67 | 30.79 | 29.82 | 4.09 | | | | | | |
| | 57 (13.9) | 37.99 | 37.99 | 2.44 | 36.8 | 36.8 | 2.69 | 35.54 | 35.54 | 2.98 | 34.14 | 34.14 | 3.3 | 32.66 | 32.66 | 3.67 | 31 | 31 | 4.09 | | | | | | |
| 1400 | 72 (22.2) | 48.97 | 24.97 | 2.53 | 47.03 | 24.2 | 2.78 | 44.97 | 23.39 | 3.08 | 42.84 | 22.55 | 3.41 | 40.52 | 21.66 | 3.78 | 38 | 20.7 | 4.2 | | | | | | |
| | 67 (19.4) | 44.5 | 30.59 | 2.53 | 42.74 | 29.81 | 2.78 | 40.9 | 29 | 3.07 | 38.95 | 28.19 | 3.39 | 34.01 | 27.21 | 3.78 | 34.53 | 26.25 | 4.18 | | | | | | |
| | 63 (17.2)†† | 41.09 | 29.41 | 2.52 | 39.46 | 28.63 | 2.78 | 37.75 | 27.82 | 3.06 | 35.8 | 26.91 | 3.37 | 34.12 | 26.11 | 3.64 | 32.22 | 25.28 | 3.92 | | | | | | |
| | 62 (16.7) | 40.38 | 36.16 | 2.52 | 38.77 | 35.38 | 2.77 | 37.09 | 34.57 | 3.06 | 35.33 | 33.74 | 3.38 | 33.38 | 32.86 | 3.76 | 32.17 | 32.17 | 4.18 | | | | | | |
| | 57 (13.9) | 39.71 | 39.71 | 2.52 | 38.42 | 38.42 | 2.77 | 37.06 | 37.06 | 3.06 | 35.53 | 35.53 | 3.39 | 33.9 | 33.9 | 3.76 | 32.22 | 32.22 | 4.17 | | | | | | |
| 1575 | 72 (22.2) | 49.79 | 25.75 | 2.6 | 47.75 | 24.96 | 2.86 | 45.64 | 24.14 | 3.15 | 43.41 | 23.27 | 3.48 | 40.99 | 22.35 | 3.86 | 38.43 | 21.39 | 4.27 | | | | | | |
| | 67 (19.4) | 45.26 | 31.9 | 2.6 | 43.42 | 31.11 | 2.85 | 41.5 | 30.28 | 3.14 | 39.43 | 29.37 | 3.47 | 37.24 | 28.45 | 3.84 | 34.91 | 27.48 | 4.25 | | | | | | |
| | 63 (17.2)†† | 41.8 | 30.63 | 2.6 | 40.09 | 29.83 | 2.85 | 38.31 | 29.01 | 3.14 | 36.36 | 28.11 | 3.47 | 34.37 | 27.2 | 3.84 | 32.18 | 26.21 | 4.24 | | | | | | |
| | 62 (16.7) | 41.06 | 38.03 | 2.59 | 39.41 | 37.29 | 2.85 | 37.67 | 36.48 | 3.14 | 35.88 | 35.97 | 3.46 | 34.85 | 34.85 | 3.84 | 32.95 | 32.95 | 4.25 | | | | | | |
| | 57 (13.9) | 40.95 | 40.95 | 2.59 | 39.58 | 39.58 | 2.85 | 38.1 | 38.1 | 3.14 | 36.54 | 36.54 | 3.46 | 34.88 | 34.88 | 3.83 | 32.91 | 32.91 | 4.26 | | | | | | |
| R5A4S48AK*NA Outdoor Section With EVD5X61M24A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1400 | 72 (22.2) | 56.4 | 27.57 | 2.88 | 54.08 | 26.71 | 3.19 | 51.53 | 25.78 | 3.54 | 48.72 | 24.76 | 3.94 | 45.6 | 23.65 | 4.39 | 42.18 | 22.44 | 4.9 | | | | | | |
| | 67 (19.4) | 51.4 | 33.88 | 2.86 | 49.32 | 33.01 | 3.16 | 47 | 32.05 | 3.51 | 44.46 | 31.02 | 3.9 | 41.61 | 29.87 | 4.35 | 38.46 | 28.63 | 4.86 | | | | | | |
| | 63 (17.2)†† | 47.64 | 32.66 | 2.85 | 45.71 | 31.8 | 3.14 | 43.58 | 30.85 | 3.48 | 41.22 | 29.81 | 3.87 | 38.58 | 28.67 | 4.32 | 35.64 | 27.41 | 4.83 | | | | | | |
| | 62 (16.7) | 46.75 | 39.99 | 2.85 | 44.85 | 39.11 | 3.14 | 42.76 | 38.17 | 3.48 | 40.44 | 37.14 | 3.87 | 38.48 | 38.48 | 4.32 | 36.04 | 36.04 | 4.83 | | | | | | |
| | 57 (13.9) | 45.65 | 45.65 | 2.84 | 44.14 | 44.14 | 3.13 | 42.46 | 42.46 | 3.48 | 40.58 | 40.58 | 3.87 | 38.4 | 38.4 | 4.32 | 36.02 | 36.02 | 4.83 | | | | | | |
| 1600 | 72 (22.2) | 57.49 | 28.7 | 2.97 | 55.07 | 27.82 | 3.28 | 52.38 | 26.86 | 3.63 | 49.45 | 25.82 | 4.04 | 46.25 | 24.68 | 4.48 | 42.69 | 23.44 | 4.99 | | | | | | |
| | 67 (19.4) | 52.43 | 35.71 | 2.95 | 50.23 | 34.82 | 3.25 | 47.8 | 33.84 | 3.6 | 45.14 | 32.78 | 4 | 42.18 | 31.57 | 4.44 | 38.89 | 30.31 | 4.95 | | | | | | |
| | 63 (17.2)†† | 48.62 | 34.37 | 2.94 | 46.58 | 33.48 | 3.23 | 44.34 | 32.5 | 3.57 | 41.87 | 31.44 | 3.97 | 39.12 | 30.25 | 4.41 | 36.08 | 28.93 | 4.92 | | | | | | |
| | 62 (16.7) | 47.69 | 42.56 | 2.93 | 45.69 | 41.68 | 3.23 | 43.56 | 40.85 | 3.57 | 42.08 | 42.08 | 3.97 | 39.76 | 39.76 | 4.42 | 37.17 | 37.17 | 4.93 | | | | | | |
| | 57 (13.9) | 47.48 | 47.48 | 2.93 | 45.85 | 45.85 | 3.23 | 44.05 | 44.05 | 3.57 | 42.03 | 42.03 | 3.97 | 39.72 | 39.72 | 4.42 | 37.13 | 37.13 | 4.93 | | | | | | |
| 1800 | 72 (22.2) | 58.32 | 29.72 | 3.06 | 55.79 | 28.82 | 3.37 | 53.02 | 27.85 | 3.73 | 49.98 | 26.78 | 4.13 | 46.68 | 25.62 | 4.58 | 43.01 | 24.35 | 5.08 | | | | | | |
| | 67 (19.4) | 53.19 | 37.42 | 3.04 | 50.9 | 36.5 | 3.34 | 48.38 | 35.51 | 3.69 | 45.61 | 34.43 | 4.09 | 42.55 | 33.24 | 4.53 | 39.23 | 31.95 | 5.04 | | | | | | |
| | 63 (17.2)†† | 49.34 | 35.95 | 3.02 | 47.21 | 35.03 | 3.32 | 44.89 | 34.04 | 3.66 | 42.32 | 32.95 | 4.06 | 39.47 | 31.75 | 4.5 | 36.32 | 30.45 | 5.01 | | | | | | |
| | 62 (16.7) | 48.44 | 45.1 | 3.02 | 46.24 | 46.24 | 3.32 | 45.37 | 45.37 | 3.67 | 43.21 | 43.21 | 4.06 | 40.77 | 40.77 | 4.52 | 38.06 | 38.06 | 5.03 | | | | | | |
| | 57 (13.9) | 48.98 | 48.98 | 3.02 | 47.25 | 47.25 | 3.32 | 45.32 | 45.32 | 3.67 | 43.16 | 43.16 | 4.06 | 40.72 | 40.72 | 4.52 | 38.04 | 38.04 | 5.03 | | | | | | |

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

DETAILED COOLING CAPACITIES# (CONTINUED)

| EVAPORATOR AIR | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------|---|-------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|-------|-----------------|----------------|------------|-----------------|----------------|-------|-----------------|----------------|--|-----------------|------------|--|--|--|
| | | 75 (23.9) | | | | 85 (29.4) | | | | 95 (35) | | | | 105 (40.6) | | | | 115 (46.1) | | | | 125 (51.7) | | | |
| | | CFM | EWB | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | Capacity MBtuh | | Total Sys. kW** | | | | |
| Total | Sens‡ | | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | Total | Sens‡ | | | | | | | | |
| R5A4S60A*ANA Outdoor Section With EVD5X61M24A* Indoor Section | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1800 | 72 (22.2) | 69.39 | 35.02 | 3.58 | 66.53 | 33.92 | 3.95 | 63.44 | 32.75 | 4.37 | 60.11 | 31.49 | 4.86 | 56.5 | 30.14 | 5.4 | 52.6 | 28.68 | 6.02 | | | | | | |
| | 67 (19.4) | 63.39 | 43.13 | 3.54 | 60.8 | 41.99 | 3.91 | 58 | 40.74 | 4.33 | 54.96 | 39.45 | 4.81 | 51.6 | 37.99 | 5.35 | 48.01 | 35.8 | 5.97 | | | | | | |
| | 63 (17.2)†† | 58.81 | 41.61 | 3.52 | 56.43 | 40.48 | 3.88 | 53.84 | 39.26 | 4.3 | 51.01 | 37.95 | 4.77 | 47.86 | 36.46 | 5.31 | 44.56 | 35.04 | 5.94 | | | | | | |
| | 62 (16.7) | 57.71 | 50.84 | 3.52 | 55.38 | 49.71 | 3.88 | 52.84 | 48.53 | 4.29 | 50.03 | 47.17 | 4.77 | 47.39 | 46.79 | 5.31 | 45.01 | 45.01 | 5.95 | | | | | | |
| | 57 (13.9) | 56.38 | 56.38 | 3.51 | 54.49 | 54.49 | 3.87 | 52.44 | 52.44 | 4.29 | 50.17 | 50.17 | 4.77 | 47.6 | 47.6 | 5.31 | 44.89 | 44.89 | 5.94 | | | | | | |
| 2000 | 72 (22.2) | 70.39 | 36.1 | 3.67 | 67.42 | 34.97 | 4.04 | 64.22 | 33.76 | 4.47 | 60.67 | 32.43 | 4.95 | 57.01 | 31.06 | 5.49 | 52.93 | 29.58 | 6.11 | | | | | | |
| | 67 (19.4) | 64.34 | 44.84 | 3.63 | 61.65 | 43.67 | 4 | 58.74 | 42.42 | 4.42 | 55.54 | 41.05 | 4.89 | 52.18 | 39.65 | 5.44 | 48.47 | 38.09 | 6.06 | | | | | | |
| | 63 (17.2)†† | 59.73 | 43.21 | 3.61 | 57.25 | 42.04 | 3.97 | 54.56 | 40.81 | 4.38 | 51.64 | 39.46 | 4.86 | 48.45 | 38.07 | 5.4 | 44.98 | 36.49 | 6.02 | | | | | | |
| | 62 (16.7) | 58.6 | 53.26 | 3.6 | 56.17 | 52.12 | 3.96 | 53.54 | 50.92 | 4.38 | 51.54 | 51.54 | 4.86 | 48.91 | 48.91 | 5.41 | 46 | 46 | 6.04 | | | | | | |
| | 57 (13.9) | 58.04 | 58.04 | 3.6 | 55.93 | 55.93 | 3.96 | 53.89 | 53.89 | 4.38 | 51.51 | 51.51 | 4.86 | 48.76 | 48.76 | 5.41 | 45.93 | 45.93 | 6.03 | | | | | | |
| 2250 | 72 (22.2) | 71.35 | 37.3 | 3.78 | 68.26 | 36.14 | 4.15 | 64.95 | 34.91 | 4.58 | 61.38 | 33.6 | 5.06 | 57.56 | 32.2 | 5.6 | 53.34 | 30.65 | 6.22 | | | | | | |
| | 67 (19.4) | 65.26 | 46.83 | 3.74 | 62.46 | 45.64 | 4.11 | 59.43 | 44.37 | 4.53 | 56.16 | 42.99 | 5.01 | 52.62 | 41.5 | 5.55 | 48.81 | 40.01 | 6.17 | | | | | | |
| | 63 (17.2)†† | 60.62 | 45.06 | 3.71 | 58.03 | 43.87 | 4.08 | 55.23 | 42.61 | 4.49 | 52.2 | 41.27 | 4.97 | 48.9 | 39.75 | 5.51 | 45.32 | 38.25 | 6.13 | | | | | | |
| | 62 (16.7) | 59.45 | 56.11 | 3.71 | 56.95 | 55 | 4.07 | 55.47 | 55.47 | 4.5 | 52.94 | 52.94 | 4.98 | 50.12 | 50.12 | 5.53 | 47.06 | 47.06 | 6.15 | | | | | | |
| | 57 (13.9) | 59.82 | 59.82 | 3.71 | 57.71 | 57.71 | 4.08 | 55.41 | 55.41 | 4.5 | 52.88 | 52.88 | 4.98 | 50.1 | 50.1 | 5.52 | 47.01 | 47.01 | 6.15 | | | | | | |

{ Total and sensible capacities are net capacities. Blower motor heat has been subtracted.
 } Sensible capacities shown are based on 80°F (27°C) entering air at the indoor coil. For sensible capacities at other than 80°F (27°C), deduct 835 Btuh (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree below 80°F (27°C), or add 835 Btuh (245 kW) per 1000 CFM (480 L/S) of indoor coil air per degree above 80°F (27°C).
 # Detailed cooling capacities are based on indoor and outdoor unit at the same elevation per AHRI standard 210/240-2024. If additional tubing length and/or indoor unit is located above outdoor unit, a slight variation in capacity may occur.
 ** System kw is total of indoor and outdoor unit kilowatts.
 {{{ At TVA rating indoor condition (75°F edb/63°F ewb). All other indoor air temperatures are at 80°F edb.
NOTE: When the required data falls between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.
EWB — Entering Wet Bulb

15 Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

CONDENSER ONLY RATINGS

| SST °F (°C) | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | |
|---------------------|-----|---|-------------|-------------|-------------|-------------|--------------|--------------|
| | | 55.0 (12.8) | 65.0 (18.3) | 75.0 (23.9) | 85.0 (29.4) | 95.0 (35.0) | 105.0 (40.6) | 115.0 (46.1) |
| R5A4S18AKANA | | | | | | | | |
| 30.0 (-1.1) | TCG | 14.69 | 13.73 | 12.87 | 12.07 | 11.27 | 10.43 | 9.53 |
| | SDT | 71.67 | 81.13 | 90.70 | 100.20 | 109.73 | 119.40 | 128.94 |
| | KW | 0.62 | 0.71 | 0.8 | 0.9 | 1.02 | 1.16 | 1.31 |
| 35.0 (1.7) | TCG | 16.16 | 15.17 | 14.27 | 13.41 | 12.57 | 11.67 | 10.7 |
| | SDT | 72.82 | 82.28 | 91.80 | 101.41 | 110.91 | 120.46 | 129.84 |
| | KW | 0.62 | 0.71 | 0.8 | 0.91 | 1.03 | 1.16 | 1.32 |
| 40.0 (4.4) | TCG | 17.71 | 16.7 | 15.77 | 14.87 | 13.96 | 13 | 11.97 |
| | SDT | 74.03 | 83.49 | 92.99 | 102.57 | 112.05 | 121.55 | 130.88 |
| | KW | 0.62 | 0.71 | 0.8 | 0.91 | 1.03 | 1.17 | 1.32 |
| 45.0 (7.2) | TCG | 19.36 | 18.33 | 17.37 | 16.43 | 15.47 | 14.44 | 13.29 |
| | SDT | 75.25 | 84.72 | 94.24 | 103.71 | 113.24 | 122.71 | 131.27 |
| | KW | 0.61 | 0.7 | 0.8 | 0.91 | 1.03 | 1.17 | 1.32 |
| 50.0 (10.0) | TCG | 21.12 | 20.07 | 19.08 | 18.1 | 17.08 | 15.98 | 14.8 |
| | SDT | 76.54 | 86.03 | 95.53 | 105.00 | 114.47 | 124.00 | 132.97 |
| | KW | 0.6 | 0.7 | 0.8 | 0.91 | 1.04 | 1.18 | 1.33 |
| 55.0 (12.8) | TCG | 22.98 | 21.92 | 20.9 | 19.88 | 18.8 | 17.64 | 16.38 |
| | SDT | 77.92 | 87.40 | 96.90 | 106.35 | 115.76 | 125.25 | 134.21 |
| | KW | 0.6 | 0.69 | 0.8 | 0.91 | 1.04 | 1.18 | 1.34 |
| R5A4S24AKANA | | | | | | | | |
| 30.0 (-1.1) | TCG | 19.64 | 18.98 | 18.08 | 17.05 | 15.94 | 14.74 | 13.58 |
| | SDT | 70.95 | 80.71 | 90.34 | 99.78 | 109.17 | 118.75 | 128.08 |
| | KW | 0.84 | 0.97 | 1.09 | 1.23 | 1.37 | 1.54 | 1.74 |
| 35.0 (1.7) | TCG | 21.73 | 20.95 | 19.95 | 18.81 | 17.62 | 16.37 | 15.03 |
| | SDT | 72.13 | 81.89 | 91.47 | 100.94 | 110.19 | 119.56 | 128.56 |
| | KW | 0.83 | 0.96 | 1.09 | 1.23 | 1.38 | 1.55 | 1.73 |
| 40.0 (4.4) | TCG | 23.95 | 23.04 | 21.94 | 20.69 | 19.38 | 18.06 | 16.64 |
| | SDT | 73.45 | 83.11 | 92.63 | 102.06 | 111.38 | 120.57 | 129.50 |
| | KW | 0.82 | 0.95 | 1.09 | 1.23 | 1.39 | 1.55 | 1.74 |
| 45.0 (7.2) | TCG | 26.31 | 25.28 | 24.04 | 22.7 | 21.28 | 19.83 | 18.34 |
| | SDT | 74.78 | 84.39 | 93.90 | 103.21 | 112.49 | 121.76 | 130.52 |
| | KW | 0.8 | 0.94 | 1.08 | 1.23 | 1.39 | 1.56 | 1.75 |
| 50.0 (10.0) | TCG | 28.81 | 27.63 | 26.28 | 24.81 | 23.28 | 21.72 | 20.16 |
| | SDT | 76.19 | 85.79 | 95.15 | 104.42 | 113.63 | 122.85 | 131.91 |
| | KW | 0.77 | 0.92 | 1.07 | 1.23 | 1.39 | 1.57 | 1.77 |
| 55.0 (12.8) | TCG | 31.46 | 30.14 | 28.64 | 27.05 | 25.4 | 23.72 | 22.04 |
| | SDT | 77.57 | 87.08 | 96.48 | 105.67 | 114.80 | 123.99 | 133.04 |
| | KW | 0.74 | 0.9 | 1.06 | 1.22 | 1.39 | 1.58 | 1.78 |

CONDENSER ONLY RATINGS (CONTINUED)

| SST °F (°C) | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | |
|---------------------|-----|---|-------------|-------------|-------------|-------------|--------------|--------------|
| | | 55.0 (12.8) | 65.0 (18.3) | 75.0 (23.9) | 85.0 (29.4) | 95.0 (35.0) | 105.0 (40.6) | 115.0 (46.1) |
| R5A4S30AKANA | | | | | | | | |
| 30.0 (-1.1) | TCG | 24.86 | 23.73 | 22.48 | 21.17 | 19.81 | 18.39 | 16.96 |
| | SDT | 70.65 | 80.17 | 89.66 | 99.05 | 108.41 | 117.82 | 127.12 |
| | KW | 0.98 | 1.15 | 1.32 | 1.49 | 1.68 | 1.89 | 2.14 |
| 35.0 (1.7) | TCG | 27.44 | 26.18 | 24.83 | 23.41 | 21.92 | 20.39 | 18.85 |
| | SDT | 71.88 | 81.42 | 90.81 | 100.14 | 109.51 | 118.81 | 128.05 |
| | KW | 0.99 | 1.16 | 1.32 | 1.5 | 1.69 | 1.91 | 2.16 |
| 40.0 (4.4) | TCG | 30.2 | 28.83 | 27.36 | 25.82 | 24.21 | 22.56 | 20.93 |
| | SDT | 73.22 | 82.67 | 92.04 | 101.32 | 110.64 | 119.88 | 128.91 |
| | KW | 0.99 | 1.16 | 1.33 | 1.51 | 1.71 | 1.93 | 2.18 |
| 45.0 (7.2) | TCG | 33.17 | 31.68 | 30.1 | 28.42 | 26.67 | 24.89 | 23.09 |
| | SDT | 74.73 | 84.10 | 93.32 | 102.58 | 111.85 | 121.06 | 130.15 |
| | KW | 1 | 1.17 | 1.35 | 1.53 | 1.73 | 1.96 | 2.21 |
| 50.0 (10.0) | TCG | 36.37 | 34.75 | 33.02 | 31.21 | 29.32 | 27.39 | 25.44 |
| | SDT | 76.29 | 85.54 | 94.75 | 103.95 | 113.17 | 122.31 | 131.35 |
| | KW | 1.02 | 1.19 | 1.36 | 1.55 | 1.75 | 1.98 | 2.24 |
| 55.0 (12.8) | TCG | 39.81 | 38.03 | 36.15 | 34.19 | 32.16 | 30.07 | 27.95 |
| | SDT | 77.95 | 87.14 | 96.35 | 105.45 | 114.56 | 123.62 | 132.62 |
| | KW | 1.03 | 1.2 | 1.38 | 1.57 | 1.78 | 2.01 | 2.28 |
| R5A4S36AKANA | | | | | | | | |
| 30.0 (-1.1) | TCG | 27.53 | 26.47 | 25.23 | 23.86 | 22.41 | 20.77 | 19.07 |
| | SDT | 72.53 | 81.92 | 91.51 | 100.96 | 110.19 | 119.57 | 128.79 |
| | KW | 1.22 | 1.39 | 1.57 | 1.77 | 2 | 2.27 | 2.58 |
| 35.0 (1.7) | TCG | 30.45 | 29.24 | 27.87 | 26.4 | 24.81 | 23.11 | 21.29 |
| | SDT | 73.96 | 83.21 | 92.75 | 102.09 | 111.42 | 120.68 | 129.94 |
| | KW | 1.22 | 1.39 | 1.58 | 1.78 | 2.01 | 2.28 | 2.59 |
| 40.0 (4.4) | TCG | 33.62 | 32.22 | 30.71 | 29.11 | 27.4 | 25.59 | 23.71 |
| | SDT | 75.43 | 84.77 | 94.09 | 103.43 | 112.70 | 121.91 | 130.97 |
| | KW | 1.23 | 1.4 | 1.59 | 1.79 | 2.03 | 2.29 | 2.6 |
| 45.0 (7.2) | TCG | 37.04 | 35.45 | 33.78 | 32.03 | 30.18 | 28.26 | 26.24 |
| | SDT | 76.93 | 86.32 | 95.67 | 104.89 | 114.06 | 123.20 | 132.16 |
| | KW | 1.24 | 1.41 | 1.6 | 1.81 | 2.04 | 2.31 | 2.61 |
| 50.0 (10.0) | TCG | 40.72 | 38.93 | 37.08 | 35.17 | 33.17 | 31.09 | 28.92 |
| | SDT | 78.95 | 88.01 | 97.21 | 106.34 | 115.50 | 124.61 | 133.66 |
| | KW | 1.25 | 1.42 | 1.61 | 1.82 | 2.06 | 2.33 | 2.63 |
| 55.0 (12.8) | TCG | 44.65 | 42.67 | 40.62 | 38.52 | 36.36 | 34.12 | 31.81 |
| | SDT | 80.77 | 89.66 | 98.88 | 108.02 | 117.03 | 126.00 | 134.98 |
| | KW | 1.25 | 1.43 | 1.63 | 1.84 | 2.07 | 2.34 | 2.65 |

CONDENSER ONLY RATINGS (CONTINUED)

| SST °F (°C) | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | |
|---------------------|-----|---|-------------|-------------|-------------|-------------|--------------|--------------|
| | | 55.0 (12.8) | 65.0 (18.3) | 75.0 (23.9) | 85.0 (29.4) | 95.0 (35.0) | 105.0 (40.6) | 115.0 (46.1) |
| R5A4S42AKANA | | | | | | | | |
| 30.0 (-1.1) | TCG | 33.75 | 32.15 | 30.57 | 29 | 27.34 | 25.63 | 23.82 |
| | SDT | 70.60 | 80.12 | 89.66 | 99.11 | 108.67 | 118.12 | 127.45 |
| | KW | 1.51 | 1.7 | 1.91 | 2.15 | 2.42 | 2.73 | 3.06 |
| 35.0 (1.7) | TCG | 37.32 | 35.57 | 33.84 | 32.13 | 30.36 | 28.46 | 26.54 |
| | SDT | 71.84 | 81.26 | 90.78 | 100.18 | 109.65 | 119.18 | 128.36 |
| | KW | 1.52 | 1.7 | 1.91 | 2.15 | 2.43 | 2.74 | 3.08 |
| 40.0 (4.4) | TCG | 41.17 | 39.26 | 37.38 | 35.5 | 33.57 | 31.54 | 29.48 |
| | SDT | 73.15 | 82.49 | 91.92 | 101.34 | 110.75 | 120.19 | 129.25 |
| | KW | 1.52 | 1.71 | 1.92 | 2.16 | 2.44 | 2.75 | 3.09 |
| 45.0 (7.2) | TCG | 45.29 | 43.2 | 41.16 | 39.12 | 37.01 | 34.84 | 32.59 |
| | SDT | 74.59 | 83.94 | 93.22 | 102.53 | 111.94 | 121.22 | 130.35 |
| | KW | 1.52 | 1.71 | 1.93 | 2.17 | 2.45 | 2.76 | 3.11 |
| 50.0 (10.0) | TCG | 49.71 | 47.45 | 45.23 | 42.99 | 40.75 | 38.35 | 35.88 |
| | SDT | 76.09 | 85.27 | 94.52 | 103.84 | 112.94 | 122.44 | 131.61 |
| | KW | 1.53 | 1.72 | 1.93 | 2.18 | 2.46 | 2.78 | 3.13 |
| 55.0 (12.8) | TCG | 54.48 | 52 | 49.55 | 47.12 | 44.65 | 42.09 | 39.41 |
| | SDT | 77.65 | 86.74 | 96.05 | 105.25 | 114.50 | 123.71 | 132.83 |
| | KW | 1.54 | 1.72 | 1.94 | 2.19 | 2.48 | 2.8 | 3.15 |
| R5A4S48AK*NA | | | | | | | | |
| 30.0 (-1.1) | TCG | 39.25 | 37.39 | 35.56 | 33.71 | 31.67 | 29.44 | 26.99 |
| | SDT | 71.90 | 81.20 | 90.56 | 99.94 | 109.23 | 118.48 | 127.64 |
| | KW | 1.78 | 1.97 | 2.19 | 2.46 | 2.78 | 3.16 | 3.6 |
| 35.0 (1.7) | TCG | 43.18 | 41.22 | 39.28 | 37.26 | 35.09 | 32.7 | 30.04 |
| | SDT | 73.39 | 82.64 | 91.97 | 101.29 | 110.54 | 119.72 | 128.79 |
| | KW | 1.79 | 1.98 | 2.21 | 2.48 | 2.8 | 3.18 | 3.61 |
| 40.0 (4.4) | TCG | 47.44 | 45.35 | 43.25 | 41.05 | 38.73 | 36.14 | 33.31 |
| | SDT | 75.01 | 84.21 | 93.45 | 102.69 | 111.91 | 121.04 | 130.08 |
| | KW | 1.78 | 1.98 | 2.22 | 2.5 | 2.82 | 3.2 | 3.64 |
| 45.0 (7.2) | TCG | 52.03 | 49.78 | 47.53 | 45.13 | 42.56 | 39.86 | 36.74 |
| | SDT | 76.76 | 85.89 | 95.09 | 104.24 | 113.37 | 122.47 | 131.40 |
| | KW | 1.78 | 1.99 | 2.24 | 2.52 | 2.85 | 3.24 | 3.67 |
| 50.0 (10.0) | TCG | 56.95 | 54.54 | 52.07 | 49.47 | 46.68 | 43.67 | 40.34 |
| | SDT | 78.62 | 87.71 | 96.83 | 105.92 | 114.96 | 123.94 | 132.77 |
| | KW | 1.78 | 2 | 2.26 | 2.55 | 2.89 | 3.27 | 3.7 |
| 55.0 (12.8) | TCG | 62.26 | 59.65 | 56.93 | 54.1 | 50.73 | 47.75 | 44.18 |
| | SDT | 80.70 | 89.74 | 98.73 | 107.73 | 116.55 | 125.50 | 134.26 |
| | KW | 1.78 | 2.02 | 2.28 | 2.58 | 2.92 | 3.31 | 3.75 |

CONDENSER ONLY RATINGS (CONTINUED)

| SST °F (°C) | | CONDENSER ENTERING AIR TEMPERATURES °F (°C) | | | | | | |
|------------------------------|-----|---|-------------|-------------|-------------|-------------|--------------|--------------|
| | | 55.0 (12.8) | 65.0 (18.3) | 75.0 (23.9) | 85.0 (29.4) | 95.0 (35.0) | 105.0 (40.6) | 115.0 (46.1) |
| R5A4S60A*ANA | | | | | | | | |
| 30.0 (-1.1) | TCG | 48.03 | 46.13 | 44.07 | 41.82 | 39.32 | 36.59 | 33.58 |
| | SDT | 71.67 | 81.07 | 90.46 | 99.81 | 109.10 | 118.33 | 127.48 |
| | KW | 2.15 | 2.39 | 2.68 | 3.02 | 3.41 | 3.86 | 4.39 |
| 35.0 (1.7) | TCG | 53.16 | 51.04 | 48.78 | 46.32 | 43.63 | 40.65 | 37.56 |
| | SDT | 73.21 | 82.54 | 91.87 | 101.14 | 110.37 | 119.55 | 128.64 |
| | KW | 2.15 | 2.4 | 2.7 | 3.03 | 3.43 | 3.88 | 4.41 |
| 40.0 (4.4) | TCG | 58.63 | 56.24 | 53.75 | 51.08 | 48.19 | 45.01 | 41.75 |
| | SDT | 74.83 | 84.09 | 93.33 | 102.55 | 111.76 | 120.83 | 129.93 |
| | KW | 2.16 | 2.42 | 2.72 | 3.06 | 3.45 | 3.9 | 4.43 |
| 45.0 (7.2) | TCG | 64.42 | 61.76 | 59 | 56.07 | 53 | 49.66 | 46.11 |
| | SDT | 76.61 | 85.74 | 94.89 | 104.02 | 113.15 | 122.20 | 131.25 |
| | KW | 2.17 | 2.44 | 2.74 | 3.09 | 3.49 | 3.95 | 4.47 |
| 50.0 (10.0) | TCG | 70.5 | 67.56 | 64.52 | 61.33 | 58 | 54.46 | 50.68 |
| | SDT | 78.45 | 87.48 | 96.55 | 105.61 | 114.66 | 123.65 | 132.58 |
| | KW | 2.18 | 2.46 | 2.77 | 3.13 | 3.53 | 3.99 | 4.52 |
| 55.0 (12.8) | TCG | 76.87 | 73.6 | 70.29 | 66.84 | 63.19 | 59.38 | 55.39 |
| | SDT | 80.41 | 89.42 | 98.37 | 107.30 | 116.24 | 125.14 | 134.01 |
| | KW | 2.21 | 2.5 | 2.82 | 3.18 | 3.58 | 4.05 | 4.58 |

KW- Outdoor Unit Kilowatts Only.

SDT-Saturated Temperature Leaving Compressor (°F)

SST-Saturated Temperature Entering Compressor (°F/°C)

TCG-Gross Cooling Capacity (1000 Btuh)

GUIDE SPECIFICATIONS GENERAL

System Description

Outdoor-mounted, air-cooled, split-system air conditioner unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of AHRI Standard 210/240.
- Unit will be certified for capacity and efficiency, and listed in AHRI directory.
- Unit construction will comply with latest edition of ANSI/ASHRAE and with NEC.
- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have c-UL-us approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils will be leak tested at 150 psig and pressure tested at 470 psig.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

- U.S. and Canada only.

PRODUCTS

Equipment

Factory assembled, single piece, air-cooled air conditioner unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge R-454B, and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with pre-paint.
Available with dense grill only.

Fans

- Condenser fan will be direct-drive propeller type, discharging air upward.
- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated bearings. Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Air-cooled, split-system air conditioner R5A4S

1.5 to 5 nominal tons

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper or aluminum tubes which are then cleaned, dehydrated, and sealed.

Refrigeration Components

- Refrigeration circuit components will include liquid-line shutoff valve with sweat connections, vapor-line shutoff valve with sweat connections, system charge of R-454B refrigerant, and compressor oil.
- Unit will be shipped with filter drier for R-454B refrigerant.

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F/°C. The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F/°C wet bulb and _____ °F/°C dry bulb, and air entering the unit at _____ °F/°C.
- The system will have a SEER2 of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 Hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Nominal unit electrical characteristics will be _____ v, three phase, 60 Hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.

System Design Summary

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-IN W.C.
2. Minimum outdoor operating air temperature without low-ambient operation accessory is 55°F (12.8°C).
3. Maximum outdoor operating air temperature is 115°F (46.1°C).
4. For reliable operation, unit should be level in all horizontal planes.
5. For interconnecting refrigerant tube lengths greater than 80 ft (23.4 m) and/or 35 ft (10.7 m) vertical differential, consult Residential Piping and Long Line Guideline and Service Manual available from equipment distributor.
6. If any refrigerant tubing is buried, provide a 6 in. (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in. (914.4 mm) may be buried without further consideration. Do not bury refrigerant lines longer than 36 in. (914.4 mm).
7. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
8. Factory-supplied filter drier must be installed

