



### **SOLR-QSFP1SFP28-5MP-OPC**

Solarflare® SOLR-QSFP1SFP28-5MP Compatible TAA Compliant 25GBase-CU QSFP28 to 1xSFP28 Direct Attach Cable (Passive Twinax, 5m)

#### **Features**

- QSFP28 End: Compliant with QSFP28 MSA

#### **Specifications**

- SFP28 End: Compliant with SFP28 MSA Specifications
- Duplex Operating at 25Gbps
- AC Coupled Inputs and Outputs
- Low Power Consumption
- Metal Housing for Superior EMI Performance
- Single Power Supply: 3.3V
- Operating Temperature: 0 to 70 Celsius
- RoHS Compliant and Lead-Free



#### **Applications:**

- Serial Data Transmission
- Infiniband EDR
- Fibre Channel

#### **Product Description**

This is a Solarflare® SOLR-QSFP1SFP28-5MP 25GBase-CU QSFP28 to 1xSFP28 direct attach cable that operates over passive copper with a maximum reach of 5.0m (16.4ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

## General Specifications

| Parameter                  | Symbol | Min. | Typ. | Max.       | Unit  | Notes |
|----------------------------|--------|------|------|------------|-------|-------|
| Bit Error Rate             | BER    |      |      | $10^{-12}$ |       |       |
| Operating Temperature      | Tc     | 0    |      | 70         | °C    | 1     |
| Storage Temperature        | Tstg   | -40  |      | 85         | °C    | 2     |
| Input Voltage              | Vcc    | 3.14 | 3.3  | 3.46       | V     |       |
| Product Weight             | GD26   |      | 110  |            | g/PCS | 3     |
| Cable Weight               | GC26   |      | 43   |            | g/M   | 4     |
| SFP28 End Dust Cap Weight  | Gs     |      | 0.80 |            | g/PCS |       |
| QSFP28 End Dust Cap Weight | Gq     |      | 1.40 |            | g/PCS |       |

### Notes:

1. Case temperature.
2. Ambient temperature.
3. The weight of the product.
4. The weight of unit length cable (two sticks). For example, the weight of a 26AWG cable is  $110+43*(5-1)+0.80+1.40=284.2g$ .

## Insertion Loss Level and Wire Gauge

| Cable Length | Wire Gauge | Insertion Loss Level |
|--------------|------------|----------------------|
| 5M           | 26AWG      | CA-25G-L             |

### Notes:

1. Cable insertion loss classification standard is IEEE 802.3by 110-10.

## Cable Specifications

| Parameter       | Symbol | Min. | Typ. | Max. | Unit     | Notes |
|-----------------|--------|------|------|------|----------|-------|
| Wire Gauge      |        | 30   |      | 26   | AWG      |       |
| Cable Impedance | Z      | 90   | 100  | 110  | $\Omega$ |       |

## Cable Dimension and Nominal Length

| Standard Wire Gauge (AWG) | Cable Diameter OD (mm) | Minimum Bending Radius R (mm) | Module Nominal Length L1 (cm) | Tolerance Range $\pm$ (cm) |
|---------------------------|------------------------|-------------------------------|-------------------------------|----------------------------|
| 26                        | 5.6                    | 30                            | $4 < L1 \leq 5$               | 6                          |

## Pin Descriptions (QSFP28 End)

| Pin | Symbol  | Name/Description                                                                      | Notes |
|-----|---------|---------------------------------------------------------------------------------------|-------|
| 1   | GND     | Module Ground.                                                                        | 1     |
| 2   | Tx2-    | Transmitter Inverted Data Input. LAN2.                                                |       |
| 3   | Tx2+    | Transmitter Non-Inverted Data Input. LAN2.                                            |       |
| 4   | GND     | Module Ground.                                                                        | 1     |
| 5   | Tx4-    | Transmitter Inverted Data Input. LAN4.                                                |       |
| 6   | Tx4+    | Transmitter Non-Inverted Data Input. LAN4.                                            |       |
| 7   | GND     | Module Ground.                                                                        | 1     |
| 8   | ModSelL | Module Select Pin. The module responds to 2-wire serial communication when low level. | 2     |
| 9   | ResetL  | Module Reset.                                                                         | 3     |
| 10  | VccRx   | +3.3V Receiver Power Supply.                                                          |       |
| 11  | SCL     | 2-Wire Serial Interface Clock.                                                        |       |
| 12  | SDA     | 2-Wire Serial Interface Data.                                                         |       |
| 13  | GND     | Module Ground.                                                                        | 1     |
| 14  | Rx3+    | Receiver Non-Inverted Data Output. LAN3.                                              |       |
| 15  | Rx3-    | Receiver Inverted Data Output. LAN3.                                                  |       |
| 16  | GND     | Module Ground.                                                                        | 1     |
| 17  | Rx1+    | Receiver Non-Inverted Data Output. LAN1.                                              |       |
| 18  | Rx1-    | Receiver Inverted Data Output. LAN1.                                                  |       |
| 19  | GND     | Module Ground.                                                                        | 1     |
| 20  | GND     | Module Ground.                                                                        | 1     |
| 21  | Rx2-    | Receiver Inverted Data Output. LAN2.                                                  |       |
| 22  | Rx2+    | Receiver Non-Inverted Data Output. LAN2.                                              |       |
| 23  | GND     | Module Ground.                                                                        | 1     |
| 24  | Rx4-    | Receiver Inverted Data Output. LAN4.                                                  |       |
| 25  | Rx4+    | Receiver Non-Inverted Data Output. LAN4.                                              |       |
| 26  | GND     | Module Ground.                                                                        | 1     |
| 27  | ModPrsL | The module is inserted into the indicate pin and grounded in the module.              | 4     |
| 28  | IntL    | Interrupt.                                                                            | 5     |
| 29  | VccTx   | +3.3V Transmitter Power Supply.                                                       |       |
| 30  | Vcc1    | +3.3V Power Supply.                                                                   |       |
| 31  | LPMODE  | Low-Power Mode.                                                                       | 1     |
| 32  | GND     | Module Ground.                                                                        | 1     |
| 33  | Tx3+    | Transmitter Non-Inverted Data Input. LAN3.                                            |       |
| 34  | Tx3-    | Transmitter Inverted Data Input. LAN3.                                                |       |

|    |      |                                            |   |
|----|------|--------------------------------------------|---|
| 35 | GND  | Module Ground.                             | 1 |
| 36 | Tx1+ | Transmitter Non-Inverted Data Input. LAN1. |   |
| 37 | Tx1- | Transmitter Inverted Data Input. LAN1.     |   |
| 38 | GND  | Module Ground.                             | 1 |

#### Notes:

1. The circuit ground is internally isolated from the chassis ground.
2. ModSell is the input pin. The module responds to 2-wire serial communication commands when it is held “low” by the host. ModSell allows multiple QSFP modules to be used on a single 2-wire interface bus. If ModSell is “high,” the module will not respond to any 2-wire interface communication from the host. ModSell has internal pull-up resistors in the module.
3. The module restart pin, when the low level on the ResetL pin lasts longer than the minimum pulse length, resets the module and restores all user modules to their default state. When performing reset device, the host should ignore all status bits. Until the module reset interrupt is completed, please note that, during hot-plugging, the module will issue this information to complete the reset interrupt without resetting.
4. This pin is active “high,” indicating that the module is running under a low-power module. The signal has no effect on the functionality of this product.
5. IntL is the output pin, which is the open collector output and must be pulled up to Vcc with a 4.7kΩ to 10kΩ resistor on the motherboard. When it is “low,” it indicates that the module may malfunction. The host uses a 2-wire serial interface to identify the interrupt source.

#### Electrical Pin-Out Details (QSFP28 End)




**Pin Descriptions (SFP28 End)**

| Pin | Symbol     | Name/Description                                                                   | Notes |
|-----|------------|------------------------------------------------------------------------------------|-------|
| 1   | Veet       | Transmitter Ground (Common with Receiver Ground).                                  | 1     |
| 2   | Tx_Fault   | Transmitter Failure Alarm. Not used.                                               |       |
| 3   | Tx_Disable | The signal turns off the module transmitter when it is “high” or “open.” Not used. |       |
| 4   | SDA        | Data Line for Serial ID.                                                           | 2     |
| 5   | SCL        | Clock Line for Serial ID.                                                          | 2     |
| 6   | MOD_ABS    | Module Absent. Grounded within the module.                                         | 2     |
| 7   | RS0        | No Connection Required.                                                            |       |
| 8   | LOS        | Loss of Signal Indication. “Logic 0” indicates normal operation.                   |       |
| 9   | RS1        | No Connection Required.                                                            |       |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                                  | 1     |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                                  | 1     |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled.                                            |       |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled.                                        |       |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                                  | 1     |
| 15  | VccR       | Receiver Power Supply.                                                             |       |
| 16  | VccT       | Transmitter Power Supply.                                                          |       |
| 17  | VeeT       | Transmitter Ground (Common with Receiver Ground).                                  | 1     |
| 18  | TD+        | Transmitter Non-Inverted Data In. AC Coupled.                                      |       |
| 19  | TD-        | Transmitter Inverted Data In. AC Coupled.                                          |       |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground).                                  | 1     |

**Notes:**

1. The circuit ground should be isolated from the chassis ground.
2. Should be pulled up with 4.7k $\Omega$  to 10k $\Omega$  on the host board to a voltage between 2V and 3.6V.

Electrical Pin-Out Details (SFP28 End)

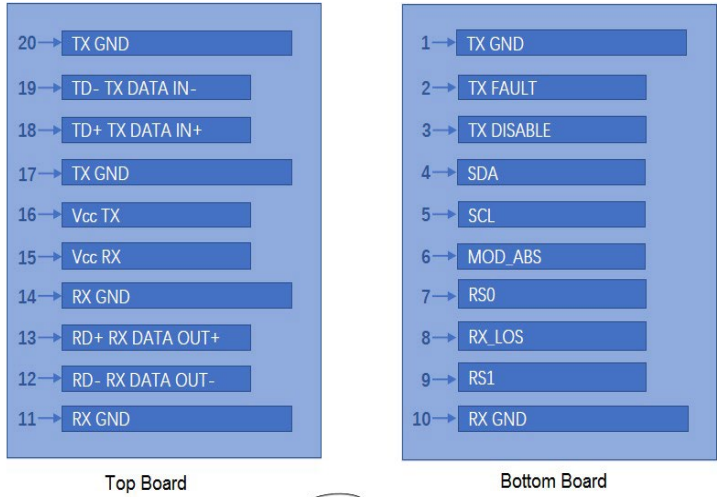

Mechanical Specifications



All dimensions are ±0.2mm unless otherwise specified. Unit: mm.

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

