


HP 13-oz Prime Matte Banner



The HP large format printing system—the complete solution

HP large format printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide uncompromising image quality, reliability, and consistency—with every print.

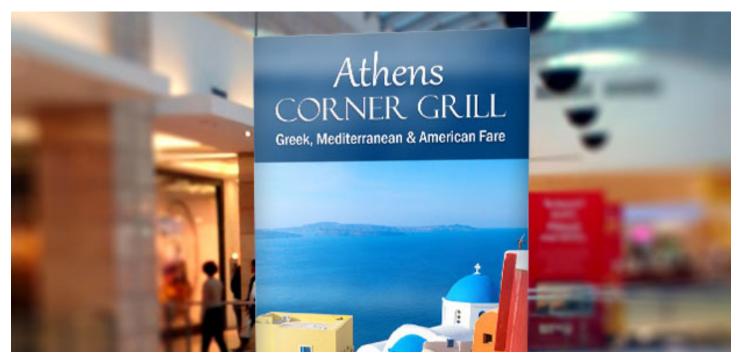

Produce durable, brilliant banners

Take on demanding display conditions

From long-lasting indoor displays to demanding outdoor display conditions, this durable frontlit banner material can handle it all. Brilliant image quality is preserved in water¹- and tear-resistant² prints. The polyester scrim reinforcement provides excellent rip-stop qualities and extra strength when grommeting.

Offer brilliant, vivid images that drape well

Achieve a professional finish with a material that's easy to handle and hang, grommet, or stitch

Gain efficiency while providing outstanding color fidelity

Save time and gain efficiency with ICC profiles that help you get the color you need quickly. Applications include indoor or outdoor signs and graphics, banner stands, POP displays, and hanging banners. Designed for use with HP Latex Inks, as well as solvent, low-solvent, and UV-curable inks.

•		
Target customers	Applications	Benefits
Sign shops	Trade show and event banners	Economical
Print service providers	Point-of-sale, retail displays	Matte finish
Quick printers	Indoor and short-term outdoor banners	Water-resistant prints for a wide range of applications ¹
Hotels, restaurants, and entertainment venues	Event and promotional signage	Bright white point for striking image contrast
	Pop-up banner stand graphics	NFPA 701 flame resistance ³

Technical specifications



HP 13-oz Prime Matte Banner

For the latest ICC profiles/paper presets, please visit <u>HPLFMedia.com/hp/paperpresets</u>.

Ink compatibility	Compatible	with Original HP Latex Inks; also solver	nt, low-solvent, and U	V-curable inks		
Weight	440 g/m² (13 oz/yd²) per ISO 536 Test Method					
Thickness	355 microns / 14 mil per ISO 534 Test Method					
Yarn dtex	1000 x 1000 dtex per DIN EN ISO 2060					
Tensile strength	1369/1044 N/5 cm (154/117.4 lb/inch) per DIN EN ISO 1421					
Tear strength	245.4/152.4 N (57.2/34.3 lb) per DIN 53363					
Opacity	100% per TAPPI T-425 Test Method					
Brightness	> 87 per TAPPI T-452 Test Method					
Whiteness	96 per ASTM E313-98 Test Method					
Finish	Matte					
Operating temperature	13 to 43° C (55 to 109°F)					
Operating humidity	10 to 70% RH					
Water resistance	Water resistant with Original HP Latex Inks ¹					
Dry time	Immediate					
Flame resistance	NFPA 701 approved fire certification ³					
Shelf life	12 months at recommended temperature and humidity					
Storage temperature	4 to 32° C (39 to 89° F)					
Storage humidity	10 to 70% RH					
Country of origin	Product of Vietnam					
Ordering information	Product num	bers Roll sizes	UPC codes	Region		
	1A724A	965 mm x 50 m (38 in x 164 ft)	848412025750	United States, Canada, and Latin America		
	1A725A	1372 mm x 50 m (54 in x 164 ft)	848412025767	United States, Canada, and Latin America		
	1A726A	1600 mm x 50 m (63 in x 164 ft)	848412025774	United States, Canada, and Latin America		
Warranty	HP large format printing materials are free from defects in materials and workmanship. For v statement, please see <u>HPLFMedia.com/hp/MediaWarranties</u> . To obtain warranty service, ple Brand Management Group customer support at <u>HPLFMedia.com/hp/en/contactus</u> .					

Performance varies based on printer and print profile. Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see HPLFMedia.com/hp/printpermanence.

For detailed information on the HP large format printing materials portfolio and to order, visit HPLFMedia.com

© 2023 HP Development Company, L.P. © 2023 Brand Management Group. The information contained herein is subject to change without notice. The only warranties for HP

products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.



Tear resistant per DIN 53363 test standard.

³ NFPA 701 approved fire certification.