




HP Natural Tracing Paper



The HP DesignJet printing system—the complete solution

HP large format printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide uncompromising image quality, reliability, and consistency—with every print.

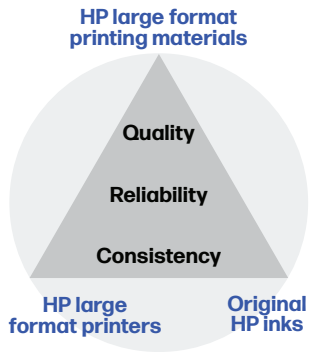

Produce clear reproducible final drawings

Communicate with clarity

Clear, concise drawings can avoid costly mistakes. Achieve crisp black and color line quality—HP Natural Tracing Paper provides excellent bleed control—for archivable prints.

Deliver easy-to-read plans

Your technical drawings need to communicate without ambiguity. Produce easy-to-understand, easy-to-read reproducible prints with HP Natural Tracing Paper, designed to work together with Original HP inks.

Deliver on time, on budget

Get the results you expect with the first print. HP printing materials are designed to work together with Original HP inks and your DesignJet printer to provide consistent, quality results.

| Target customers | Applications | Benefits |
|--------------------------------------|---|------------------------------------|
| Architects | Engineering (CAD), architecture (AEC), and Geographic Information Systems (GIS) archives or reproductions | Crisp black and color line quality |
| Engineers | | Excellent bleed control |
| Geographic Information Systems (GIS) | | Archivable prints |

Technical specifications



HP Natural Tracing Paper
For the latest ICC profiles/paper presets, please visit HPLFMedia.com/hp/paperpresets.

| | | | | |
|-----------------------|---|----------------------------------|--------------|-----------|
| Ink compatibility | Original HP pigment- and dye-based inks for HP DesignJet printers | | | |
| Weight | 90 g/m² per ISO 536 Test Method | | | |
| Thickness | 76 microns/3 mil per ISO 534 Test Method | | | |
| Opacity | 25% per TAPPI T-425 Test Method | | | |
| Brightness | 61 per TAPPI T-452 Test Method | | | |
| Finish | Matte | | | |
| Operating temperature | 15 to 35° C / 59 to 95° F | | | |
| Operating humidity | 20 to 80% RH | | | |
| Dry time | Less than 2 minutes (at 23°C, 50% RH) | | | |
| Shelf life | 1 year, unopened in original packaging | | | |
| Storage temperature | 0 to 40° C / 32 to 104° F | | | |
| Storage humidity | 5 to 95% RH | | | |
| Environmental | Commonly recyclable ¹ and FSC®-certified paper ² | | | |
| Country of origin | Product of United Kingdom | | | |
| Warranty | HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see HPLFMedia.com/go/mediawarranties . To obtain warranty service, please contact Brand Management Group customer support at HPLFMedia.com/hp/en/contactus . | | | |
| Ordering information | Product numbers | Roll sizes | UPC codes | Region |
| | C3869A | 610 mm x 45,7 m (24 in x 150 ft) | 848412014211 | Worldwide |
| | C3868A | 914 mm x 45,7 m (36 in x 150 ft) | 848412014228 | Worldwide |

¹ Can be recycled through commonly available recycling programs.
² HP has a policy for offering Forest Stewardship Council®(FSC®)-certified paper that are sourced from FSC®-certified forests and other controlled sources. BMG trademark license code FSC®-C115319, see fsc.org. HP trademark license code FSC®-C017543, see fsc.org. Not all FSC®-certified products are available in all regions. For information about HP large format printing materials, please visit HPLFMedia.com.



For detailed information on the HP large format printing materials portfolio and to order, see HPLFMedia.com