



### **XFP-10GB-CW53-80-I-OPC**

MSA and TAA 10GBase-CWDM XFP Transceiver (SMF, 1530nm, 80km, LC, DOM, -40 to 85C)

#### **Features**

- INF-8077i Compliance
- Duplex LC Connector
- Single-mode Fiber
- Industrial Temperature -40 to 85 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



#### **Applications:**

- 10x Gigabit Ethernet over CWDM
- 8x/10x Fibre Channel
- Access, Metro and Enterprise
- Mobile Fronthaul CPRI/OBSAI

#### **Product Description**

This MSA compliant XFP transceiver provides 10GBase-CWDM throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1530nm via an LC connector. It is capable of withstanding rugged environments and can operate at temperatures between -40 and 85C. The listed reach has been determined using a link budget calculation and tested in a standard environment. Actual link distances achieved will be dependent upon the deployed environment. All of our transceivers are built to comply with Multi-Source Agreement (MSA) standards and are uniquely serialized and tested for data-traffic and application to ensure seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.7.
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2
- Immunity compatible with IEC 61000-4-3.
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2.
- RoHS compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

## CWDM Available Wavelengths

| Wavelengths | Min.   | Typ. | Max.   |
|-------------|--------|------|--------|
| 1270        | 1264.5 | 1271 | 1277.5 |
| 1290        | 1284.5 | 1291 | 1297.5 |
| 1310        | 1304.5 | 1311 | 1317.5 |
| 1330        | 1324.5 | 1331 | 1337.5 |
| 1350        | 1344.5 | 1351 | 1357.5 |
| 1370        | 1364.5 | 1371 | 1377.5 |
| 1390        | 1384.5 | 1391 | 1397.5 |
| 1410        | 1404.5 | 1411 | 1417.5 |
| 1430        | 1424.5 | 1431 | 1437.5 |
| 1450        | 1444.5 | 1451 | 1457.5 |
| 1470        | 1464.5 | 1471 | 1477.5 |
| 1490        | 1484.5 | 1491 | 1497.5 |
| 1510        | 1504.5 | 1511 | 1517.5 |
| 1530        | 1524.5 | 1531 | 1537.5 |
| 1550        | 1544.5 | 1551 | 1557.5 |
| 1570        | 1564.5 | 1571 | 1577.5 |
| 1590        | 1584.5 | 1591 | 1597.5 |
| 1610        | 1604.5 | 1611 | 1617.5 |

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Max. | Unit |
|----------------------------|--------|------|------|------|
| Maximum Supply Voltage     | Vcc3   | -0.5 | 4.0  | V    |
|                            | Vcc5   | -0.5 | 6.0  |      |
| Storage Temperature        | TS     | -40  | 85   | °C   |
| Operating Humidity         | RH     | 5    | 85   | %    |
| Case Operating Temperature | Tc     | -40  | 85   | °C   |
| 50/125µm MMF (OM3)         | Lmax   |      | 70   | km   |

## Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

| Parameter                      | Symbol   | Min.    | Typ. | Max.    | Unit | Notes |
|--------------------------------|----------|---------|------|---------|------|-------|
| Power Supply Voltage           | Vcc3     | 3.13    | 3.30 | 3.47    | V    |       |
|                                | Vcc5     | 4.75    | 5.0  | 5.25    |      |       |
| Power Supply Current           | Icc3     |         |      | 750     | mA   |       |
|                                | Icc5     |         |      | 500     |      |       |
| Transmitter                    |          |         |      |         |      |       |
| Differential data input swing  | Vin,pp   | 120     | 600  | 850     | mV   |       |
| Input differential impedance   | Zin      | 90      | 100  | 110     | Ω    |       |
| Receiver                       |          |         |      |         |      |       |
| Differential data output swing | Vout, pp | 300     | 600  | 850     | mV   |       |
| Output differential impedance  | Zin      | 90      | 100  | 110     | Ω    |       |
| Transceiver                    |          |         |      |         |      |       |
| Ref-clk input swing            | Ref,pp   | 400     |      | 2400    | mV   |       |
| TX Disable-High                |          | 2.0     |      | Vcc+0.3 | V    |       |
| TX Disable-Low                 |          | Vee-0.3 |      | 0.8     | V    |       |
| LOS-High                       |          | 2.0     |      | Vcc+0.3 | V    |       |
| LOS-Low                        |          | Vee-0.3 |      | 0.8     | V    |       |
| MOD_DESEL-High                 |          | 2.0     |      | Vcc+0.3 | V    |       |
| MOD_DESEL-Low                  |          | Vee-0.3 |      | 0.8     | V    |       |
| MOD_INT-High                   |          | 2.0     |      | Vcc+0.3 | V    |       |
| MOD_INT-Low                    |          | Vee-0.3 |      | 0.8     | V    |       |
| MOD_NR-High                    |          | 2.0     |      | Vcc+0.3 | V    |       |
| MOD_NR-Low                     |          | Vee-0.3 |      | 0.8     | V    |       |
| P_DOWN/RST-High                |          | 2.0     |      | Vcc+0.3 | V    |       |
| P_DOWN/RST-Low                 |          | Vee-0.3 |      | 0.8     | V    |       |

**Notes:**

1. Maximum total power value is specified across the full temperature and voltage range and the inrush current is included.

**Optical Characteristics**

| Parameter                                     | Symbol      | Min.          | Typ.        | Max.          | Unit  | Notes |
|-----------------------------------------------|-------------|---------------|-------------|---------------|-------|-------|
| <b>Transmitter</b>                            |             |               |             |               |       |       |
| Operating Data Rate                           |             | 9.95          |             | 11.3          |       |       |
| Output Opt. Power                             | PO          | 0             |             | 4             | dBm   |       |
| Center Wavelength Spacing                     |             |               | 100         |               | GHZ   |       |
| Optical Wavelength                            | $\lambda$   | $\lambda-6.5$ | $\lambda$   | $\lambda+6.5$ | nm    |       |
| Side Mode Suppression Ratio                   | SMSR        | 30            |             |               | dB    |       |
| Optical Extinction Ratio                      | ER          | 9             |             |               | dB    |       |
| Generation Jitter 1(20KHZ-80MHZ)              |             |               |             | 0.3           | Ulp-p | 1     |
| Generation Jitter 2(4MHZ-80MHZ)               |             |               |             | 0.1           | Ulp-p | 1     |
| Dispersion penalty (@1450ps/nm, non-FEC rate) |             |               |             | 2             | dB    | 3     |
| Dispersion penalty (@1300ps/nm, FEC rate)     |             |               |             | 3             | dB    | 3     |
| Optical Eye Mask 1                            |             |               | ITU-T G.691 |               |       | 1     |
| Optical Eye Mask 2                            |             |               | IEEE802.3ae |               |       | 2     |
| <b>Receiver</b>                               |             |               |             |               |       |       |
| Overload                                      |             | -8            |             |               | dBm   |       |
| Optical Center Wavelength                     | $\lambda_C$ | 1270          |             | 1600          | nm    |       |
| LOS De-Assert                                 | LOSD        |               |             | -26           | dBm   |       |
| LOS Assert                                    | LOSA        | -34           |             |               | dBm   |       |
| LOS Hysteresis                                |             | 0.5           |             | 5             | dB    |       |
| Receiver Sensitivity @non-FEC rate            | Pmin1       |               |             | -23           | dBm   | 3     |
| Receiver Sensitivity @ FEC rate               | Pmin2       |               |             | -27           | dBm   | 3     |

**Notes:**

1. Measured at 9.9532GBs, PRBS<sup>31</sup>-1, NRZ.
2. Measured at 10.3125GBs, Non-framed PRBS<sup>231</sup>-1, NRZ.
3. Non-FEC rate refers 9.9/10.3/10.5 Gbs, and FEC rate refers 10.7/11.1/11.3 Gbs, BER of 1E-12 for non-FEC rate, and 1E-4 for FEC rate.


## Pin Descriptions

| Pin | Symbol     | Name/Descriptions                                                                                                                                                  | Ref. |
|-----|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1   | GND        | Module Ground                                                                                                                                                      |      |
| 2   | Vee5       | (not required)                                                                                                                                                     |      |
| 3   | MOD_DESEL  | Module De-select; When Held low allows the module to respond to 2-wire serial interface. LVTTTL-I                                                                  |      |
| 4   | /INTERRUPT | Interrupt; Indicates presence of an important condition which can be read via the 2-wire serial interface. LVTTTL-O                                                | 2    |
| 5   | TX_DIS     | Transmitter Disable. Logic1 indicates laser output disabled, LVTTTL-I                                                                                              |      |
| 6   | VCC5       | +5V Power Supply (Not required)                                                                                                                                    |      |
| 7   | GND        | Module Ground                                                                                                                                                      | 1    |
| 8   | VCC3       | +3.3V Power Supply                                                                                                                                                 |      |
| 9   | VCC3       | +3.3V Power Supply                                                                                                                                                 |      |
| 10  | SCL        | 2-Wire Serial Interface Clock. LVTTTL-I                                                                                                                            | 2    |
| 11  | SDA        | 2-Wire Serial Interface Data Line. LVTTTL-I/O                                                                                                                      | 2    |
| 12  | MOD_Abs    | Indicates Module is not present. Grounded in the Module. LVTTTL-O                                                                                                  | 2    |
| 13  | MOD_NR     | Module Not Ready; Indicating Module Operational Fault. Open-collector. LVTTTL-O                                                                                    | 2    |
| 14  | RX_LOS     | Loss of Signal indication. Logic 1 indicates loss of Signal. Open-collector. LVTTTL-O                                                                              | 2    |
| 15  | GND        | Module Ground                                                                                                                                                      | 1    |
| 16  | GND        | Module Ground                                                                                                                                                      | 1    |
| 17  | RD-        | Receiver Inverted Data Output. CML-O                                                                                                                               |      |
| 18  | RD+        | Receiver Non-Inverted Data Output. CML-O                                                                                                                           |      |
| 19  | GND        | Module Ground                                                                                                                                                      | 1    |
| 20  | VCC2       | +1.8V Power Supply (Not required).                                                                                                                                 | 3    |
| 21  | P_DOWN/RST | Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode. LVTTTL-I |      |
|     |            | Reset; The falling edge initiates a complete reset of the module including the 2wire serial interface, equivalent to a power cycle. LVTTTL-I                       |      |
| 22  | VCC2       | +1.8V Power Supply (Not required)                                                                                                                                  | 3    |
| 23  | GND        | Module Ground                                                                                                                                                      | 1    |
| 24  | REFCLK+    | Reference Clock (Not required)                                                                                                                                     |      |
| 25  | REFCLK-    | Reference Clock (Not required)                                                                                                                                     |      |
| 26  | GND        | Module Ground                                                                                                                                                      | 1    |
| 27  | GND        | Module Ground                                                                                                                                                      | 1    |
| 28  | TD-        | Transmitter Inverted Data Input. CML-I                                                                                                                             |      |
| 29  | TD+        | Transmitter Non-Inverted Data Input. CML-I                                                                                                                         |      |

|    |     |               |   |
|----|-----|---------------|---|
| 30 | GND | Module Ground | 1 |
|----|-----|---------------|---|


**Notes:**

1. Module ground pins GND are isolated from the module case and chassis ground within the module.
2. Open collector; should be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.6V on the host board.
3. The pins are open within module.

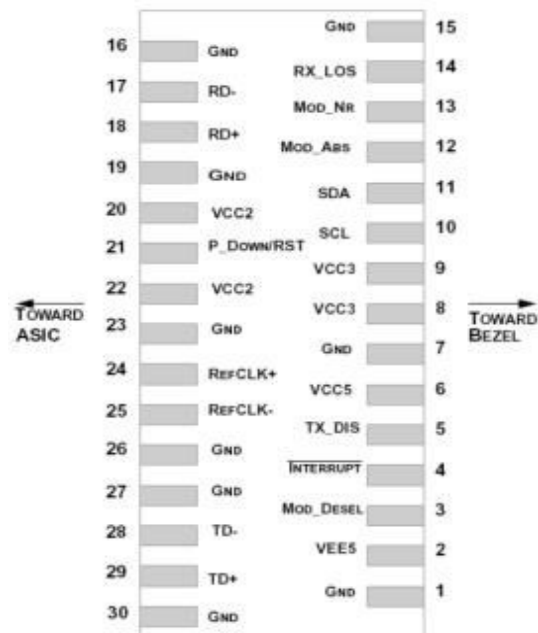


Pin-out of connector Block on Host board

Recommend Circuit Schematic

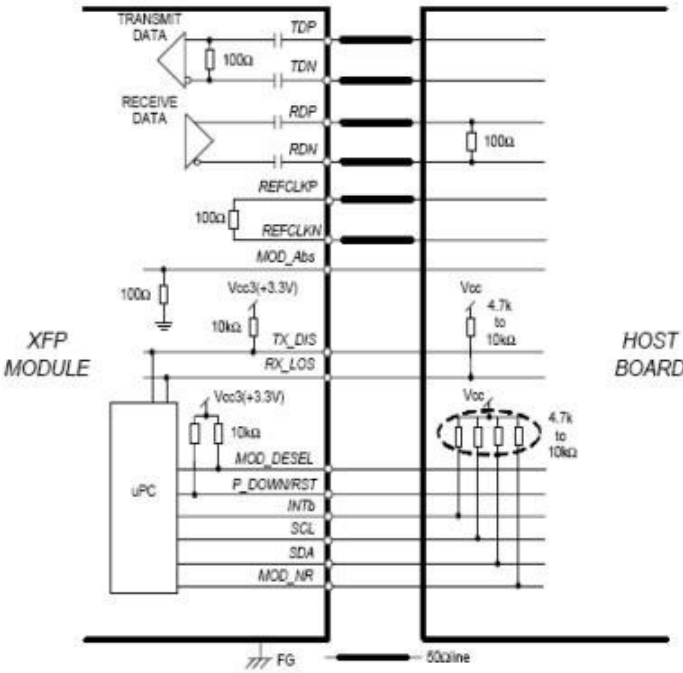

Mechanical Specifications

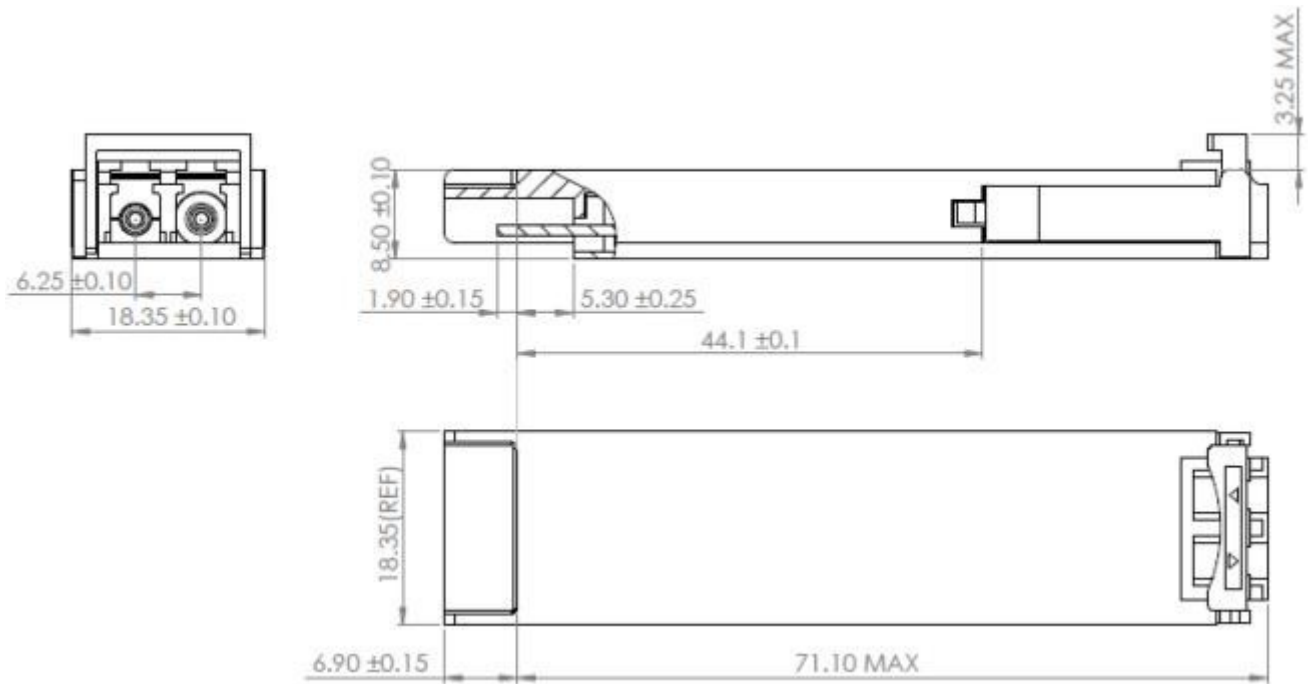


## Management Interface

XFP 2-wire serial interface is specified in the Chapter 4 of the XFP MSA specification. The XFP 2-wire serial interface is used for serial ID, digital diagnostics, and certain control functions. The 2-wire serial interface is mandatory for all XFP modules. The 2-wire serial interface address of the XFP module is 1010000X(A0h). In order to access to multiple modules on the same 2-wire serial bus, the XFP has a MOD\_DESEL(module deselect pin). This pin (which is pull high or deselected in the module) must be held low by the host to select of interest and allow communication over 2-wire serial interface. The module must not respond to or accept 2-wire serial bus instructions unless it is selected.

## XFP Management Interface

XFP Management interface is specified in the Chapter 5 of the XFP MSA specification. The Figure 1 shows the structure of the memory map. The normal 256 Byte address space is divided into lower and upper blocks of 128 Bytes. The lower block of 128 Byte is always directly available and is used for the diagnostics and control functions that must be accessed repeatedly. Multiple blocks of memories are available in the upper 128 Bytes of the address space. These are individually addressed through a table select Byte which the user enters into a location in the lower address space. The upper address space tables are used for less frequently accessed functions and control space for future standards definition.

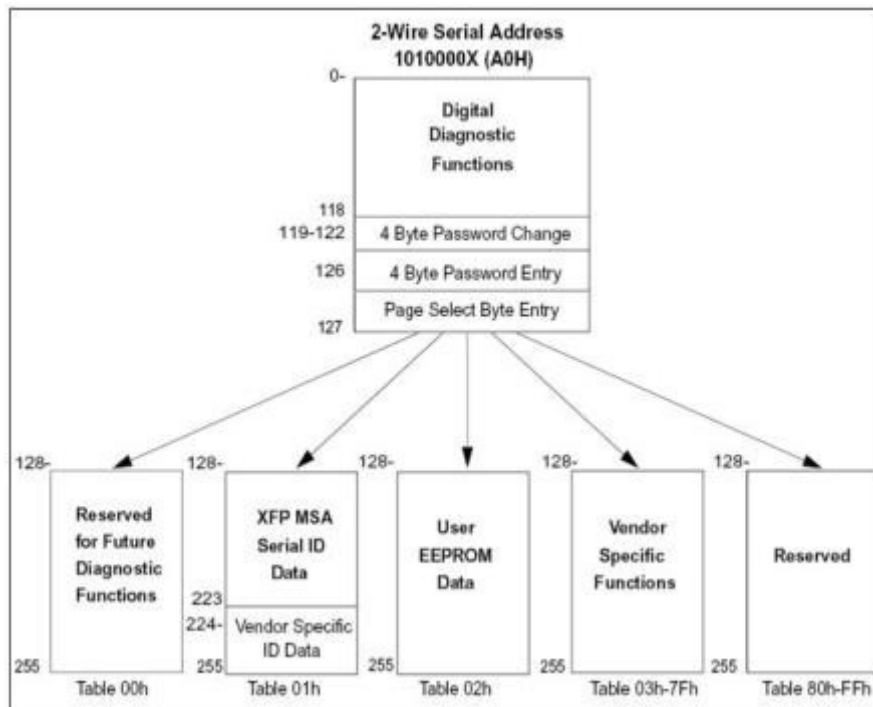

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

