

### 1783-SFP1GSX-OPC

Allen-Bradley® 1783-SFP1GSX Compatible TAA 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)

#### Features

- INF-8074 and SFF-8472 Compliance
- Duplex LC Connector
- VCSEL transmitter and PIN receiver
- Multi-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



#### Applications:

- 1000Base-SX Ethernet
- 1x Fibre Channel
- Access and Enterprise

#### Product Description

This Allen-Bradley® 1783-SFP1GSX compatible SFP transceiver provides 1000Base-SX throughput up to 550m over multi-mode fiber (MMF) using a wavelength of 850nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Allen-Bradley®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

## Absolute Maximum Ratings

| Parameter                    | Symbol | Min. | Typ.  | Max. | Unit | Notes |
|------------------------------|--------|------|-------|------|------|-------|
| Supply Voltage               | Vcc    | -0.5 |       | 4.0  | V    |       |
| Storage Temperature          | Tstg   | -40  |       | 85   | °C   |       |
| Case Operating Temperature   | Tc     | 0    |       | 70   | °C   |       |
| Operating Humidity           | RH     | 5    |       | 95   | %    |       |
| Data Rate (Gigabit Ethernet) |        |      | 1.25  |      | Gbps |       |
| Data Rate (Fibre Channel)    |        |      | 1.063 |      | Gbps |       |
| 50/125µm MMF                 | L      |      |       | 550  | m    |       |
| Power Consumption            |        |      |       | 0.87 | W    |       |

## Electrical Characteristics

| Parameter                      | Symbol   | Min.    | Typ. | Max.    | Unit | Notes |
|--------------------------------|----------|---------|------|---------|------|-------|
| Power Supply Voltage           | Vcc      | 3.13    | 3.30 | 3.47    | V    |       |
| Power Supply Current           | Icc      |         |      | 250     | mA   |       |
| <b>Transmitter</b>             |          |         |      |         |      |       |
| Input Differential Impedance   | RIN      |         | 100  |         | Ω    | 1     |
| Single-Ended Data Input Swing  | VIN,pp   | 250     |      | 1200    | mV   |       |
| Tx_Disable - High              |          | Vcc-1.3 |      | Vcc     | V    |       |
| Tx_Disable - Low               |          | Vee     |      | Vee+0.8 | V    |       |
| Tx_Fault - High                |          | Vcc-0.5 |      | Vcc     | V    |       |
| Tx_Fault - Low                 |          | Vee     |      | Vee+0.5 | V    |       |
| <b>Receiver</b>                |          |         |      |         |      |       |
| Single-Ended Data Output Swing | VOOUT,pp | 300     | 400  | 800     | mV   | 2     |
| Data Output Rise Time          | Tr       |         |      | 175     | ps   | 3     |
| Data Output Fall Time          | Tf       |         |      | 175     | ps   | 3     |
| LOS - High                     |          | Vcc-0.5 |      | Vcc     | V    |       |
| LOS - Low                      |          | Vee     |      | Vee+0.5 | V    |       |

### Notes:

1. AC coupled.
2. Into 100Ω differential termination.
3. 20-80%.

## Optical Characteristics

| Parameter                | Symbol            | Min. | Typ. | Max. | Unit | Notes |
|--------------------------|-------------------|------|------|------|------|-------|
| Transmitter              |                   |      |      |      |      |       |
| Average Output Power     | PO                | -9   |      | -4   | dBm  | 1     |
| Optical Wavelength       | $\lambda$         | 830  | 850  | 860  | nm   |       |
| Spectral Width           | $\sigma$          |      |      | 0.85 | nm   |       |
| Optical Rise/Fall Time   | Tr/Tf             |      |      | 260  | ps   | 2     |
| Total Jitter             | TJ                |      |      | 200  | ps   |       |
| Optical Extinction Ratio | ER                | 9    |      |      | dB   |       |
| Receiver                 |                   |      |      |      |      |       |
| Receiver Sensitivity     | RSENS             |      |      | -18  | dBm  | 3, 4  |
| Maximum Received Power   | RX <sub>MAX</sub> | 0    |      |      | dBm  |       |
| Center Wavelength        | $\lambda_C$       | 770  |      | 860  | nm   |       |
| LOS De-Assert            | LOSD              |      |      | -26  | dBm  |       |
| LOS Assert               | LOSA              | -40  |      |      | dBm  |       |
| LOS Hysteresis           |                   | 0.5  |      | 5    | dB   |       |

### Notes:

1. Class 1 laser safety.
2. Unfiltered, 20-80%. Complies with GE and 1xFC eye masks when filtered.
3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-10</sup> BER.

## Pin Descriptions

| Pin | Symbol      | Name/Description                                                 | Notes |
|-----|-------------|------------------------------------------------------------------|-------|
| 1   | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 2   | Tx_Fault    | Transmitter Fault.                                               |       |
| 3   | Tx_Disable  | Transmitter Disable. Laser output disabled on “high” or “open.”  | 2     |
| 4   | MOD_DEF(2)  | Module Definition 2. Data Line for Serial ID.                    | 3     |
| 5   | MOD_DEF(1)  | Module Definition 1. Clock Line for Serial ID.                   | 3     |
| 6   | MOD_DEF(0)  | Module Definition 0. Grounded within the module.                 | 3     |
| 7   | Rate Select | No Connection Required.                                          |       |
| 8   | LOS         | Loss of Signal Indication. “Logic 0” indicates normal operation. | 4     |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 12  | RD-         | Receiver Inverted Data Out. AC Coupled.                          |       |
| 13  | RD+         | Receiver Non-Inverted Data Out. AC Coupled.                      |       |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 15  | VccR        | Receiver Power Supply.                                           |       |
| 16  | VccT        | Transmitter Power Supply.                                        |       |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 18  | TD+         | Transmitter Non-Inverted Data In. AC Coupled.                    |       |
| 19  | TD-         | Transmitter Inverted Data In. AC Coupled.                        |       |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |


## Notes:

1. The circuit ground is internally isolated from the chassis ground.
2. Laser output is disabled on Tx\_Disable>2.0V or open, enabled on Tx\_Disable<0.8V.
3. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls the line low to indicate that the module is plugged in.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2.0V and 3.6V. “Logic 0” indicates normal operation. “Logic 1” indicates a loss of signal.




Pin-Out of Connector Block on the Host Board

### Recommended Circuit Schematic

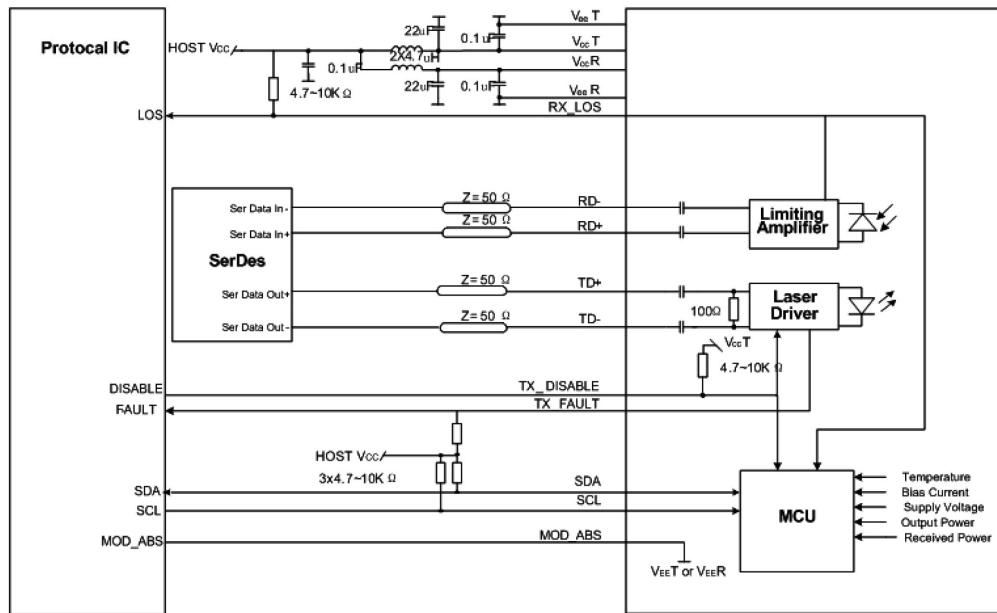


**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

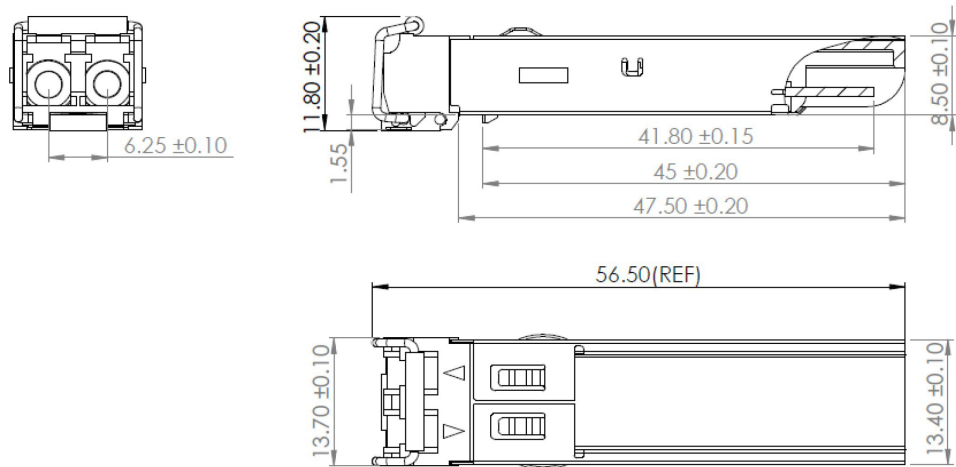

**EEPROM Information**

EEPROM memory map-specific data field description is as below:

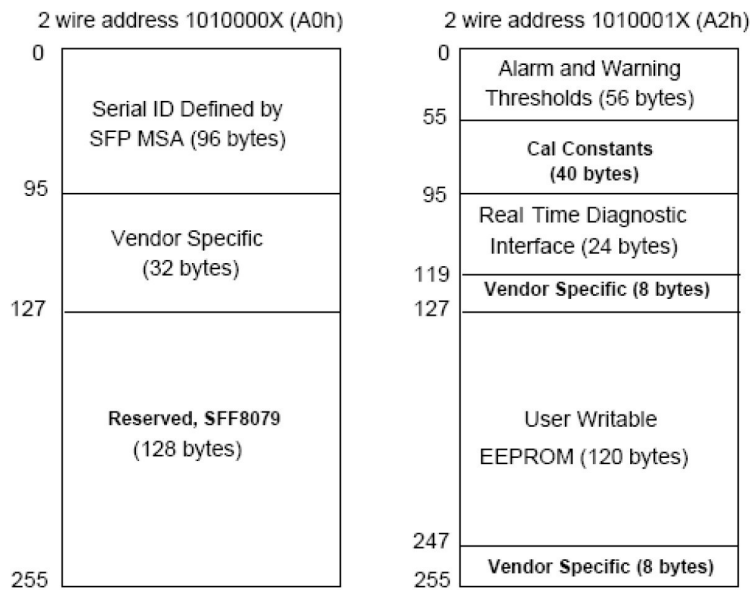

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

