



SFP-10GB-PDAC1M-I-C-OPC

Cisco® Compatible TAA 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m, -40 to 85C)

Features

- Compliant to SFF-8431/8432 and INF-8074
- Up to 10.3125Gbps
- Passive copper
- Built-in EEPROM function
- 30AWG Wire Gauge
- Industrial Temperature -40 to 85 Celsius
- Metal with Lower EMI
- RoHS Compliant and Lead Free



Applications:

- 10GBase Ethernet

Product Description

This is a Cisco® compatible 10GBase-CU SFP+ to SFP+ direct attach cable that operates over passive copper with a maximum reach of 1m. It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015.
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2.
- Immunity: compatible with IEC 61000-4-3.
- EMI: compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.
- Laser Eye Safety: compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1, 2.
- RoHS: compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

General Specifications

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------|--------|------|------|------|------|
| Supply Voltage | Vcc | 3.13 | 3.3 | 3.47 | V |
| Storage Temperature | Tstg | -40 | | 85 | °C |
| Operating Case Temperature | Tc | -40 | | 85 | °C |
| Humidity | RH | 5 | | 85 | % |
| Data Rate | | | 10 | | Gbps |

Cable Specifications

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|-----------------|-------------------------------|------|------|------|------|
| Length | L | | | 1 | M |
| AWG | | 30 | | | AWG |
| Jacket Material | PVC, Black (Or Customization) | | | | |

Electrical Specifications

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---------------------------|----------|---|------|-------|------|
| Resistance | Rcon | | | 3 | Ω |
| Insulation Resistance | Rins | | | 10 | MΩ |
| Raw Cable Impedance | Zca | 95 | 100 | 110 | Ω |
| Mated Connector Impedance | Zmated | 85 | 100 | 110 | Ω |
| Insertion Loss at 5.16GHz | SDD21 | | | 17.04 | dB |
| Return Loss | SDD11/22 | $\text{Return_loss}(f) \geq \begin{cases} 12-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 6.3-13\log_{10}(f/5.5) & 4.1 \leq f \leq 10 \end{cases}$ | | | dB |


Pin Descriptions

| Pin | Logic | Symbol | Power Sequence Order | Name/Description | Note |
|-----|-----------|------------|----------------------|--|------|
| 1 | | VeeT | 1 st | Module Transmitter Ground. | 3 |
| 2 | LVTTL-O | Tx_Fault | 3 rd | Module Transmitter Fault. | 4 |
| 3 | LVTTL-I | Tx_Disable | 3 rd | Transmitter Disable. Turns off the transmitter laser output. | 5 |
| 4 | LVTTL-I/O | SDA | 3 rd | 2-Wire Serial Interface Data (Same as MOD_DEF2 in INF-8074i). | |
| 5 | LVTTL-I/O | SCL | 3 rd | 2-Wire Serial Interface Clock (Same as MOD_DEF1 in INF-8074i). | |
| 6 | | MOD_ABS | 3 rd | Module Absent. Connected to VeeT or VeeR in the module. | |
| 7 | LVTTL-I | RS0 | 3 rd | Rate Select 0. Optionally controls the SFP+ module receiver. | |
| 8 | LVTTL-O | Rx_LOS | 3 rd | Receiver Loss of Signal Indication. In FC, designated as Rx_LOS. In Ethernet, designated as Signal Detect. | 4 |
| 9 | LVTTL-I | RS1 | 3 rd | Rate Select 1. Optionally controls the SFP+ module transmitter. | |
| 10 | | VeeR | 1 st | Module Receiver Ground. | 3 |
| 11 | | VeeR | 1 st | Module Receiver Ground. | 3 |
| 12 | CML-O | RD- | 3 rd | Receiver Inverted Data Output. | |
| 13 | CML-O | RD+ | 3 rd | Receiver Non-Inverted Data Output. | |
| 14 | | VeeR | 1 st | Module Receiver Ground. | 3 |
| 15 | | VccR | 2 nd | +3.3V Module Receiver Supply. | |
| 16 | | VccT | 2 nd | +3.3V Module Transmitter Supply. | |
| 17 | | VeeT | 1 st | Module Transmitter Ground. | 3 |
| 18 | CML-I | TD+ | 3 rd | Transmitter Non-Inverted Data Input. | |
| 19 | CML-I | TD- | 3 rd | Transmitter Inverted Data Input. | |
| 20 | | VeeT | 1 st | Module Transmitter Ground. | 3 |


Notes:

1. Labeling as inputs (I) and outputs (O) are from the perspective of the module.
2. The case makes electrical contact with the cage before any of the board edge contacts are made.
3. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
4. This contact is an open collector/drain output contact and shall be pulled up on the host board. Pull-ups can be connected to one of several power supplies; however, the host board design shall ensure that no module contact has a voltage exceeding the module VccT/R+0.5V.
5. Tx_Disable is an input contact with a 4.7kΩ to 10kΩ pull-up to the VccT inside the module.


Electrical Pin-Out Details for SFP

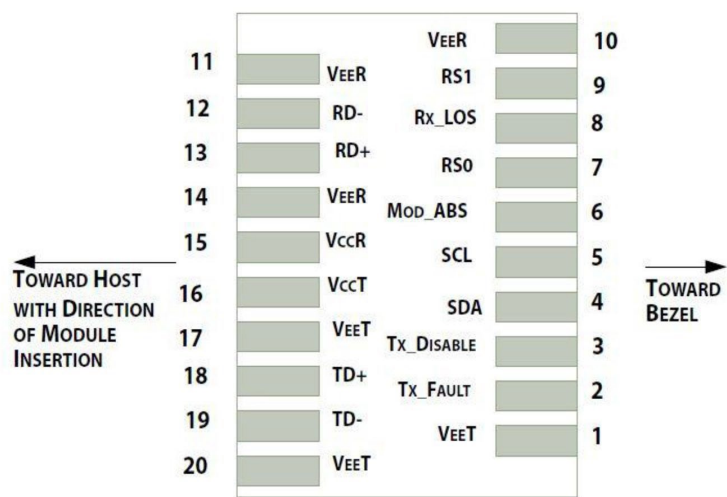

Mechanical Specifications

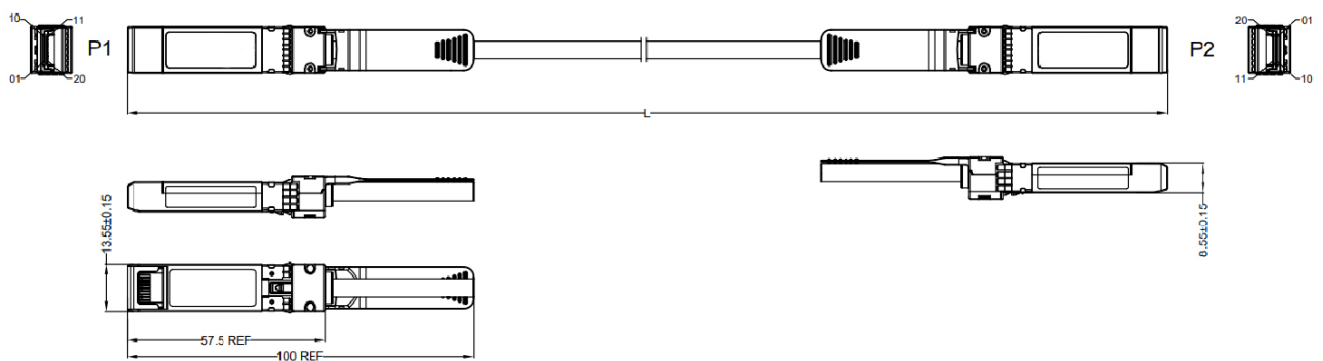

Cable Cross Section

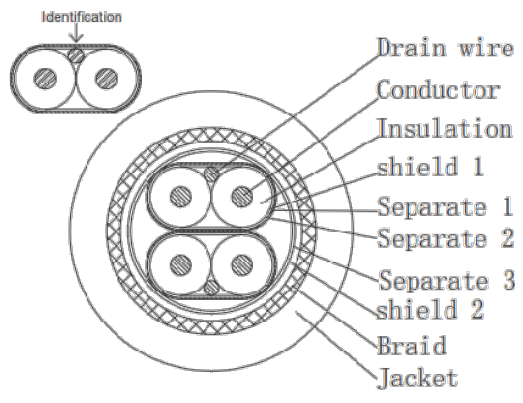

OptioConnect

Innovation for the Future of High-Speed Networking

Who We Are

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

What We Do

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

Smarter Networks by Design

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

Our Team

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

Our Mission

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

Let's Connect

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

www.optioconnect.com | info@optioconnect.com

