



### **QSFP-100G-LR-AR-CW29-OPC**

Arista Networks® QSFP-100G-LR-AR-CW29 Compatible TAA 100GBase-CWDM QSFP28 Transceiver Single Lambda (SMF, 1290nm, 10km w/FEC, LC, DOM)

#### **Features**

- Supports 100Gbps
- 100G Lambda MSA 100G-LR Specification Compliant
- Single 3.3V Power Supply
- Power Dissipation < 4.5W
- Up to 10km over SMF with FEC
- QSFP28 MSA Compliant
- SFF-8636 Rev 2.10a Compliant
- 4x25G Electrical Interface
- LC Duplex Connector
- Operating Case Temperature: 0C to 70C
- I2C Interface with Integrated Digital Diagnostic Monitoring
- RoHS compliant



#### **Applications:**

- 100GBase Ethernet over CWDM
- Access, Metro and Enterprise

#### **Product Description**

This Arista Networks® QSFP-100G-LR-AR-CW29 compatible QSFP28 transceiver provides 100GBase-CWDM throughput up to 10km w/host FEC over single-mode fiber (SMF) using a single lambda wavelength of 1290nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Arista Networks®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

### CWDM Available Wavelengths

Wavelengths	Min.	Typ.	Max.
27	1264.5	1271	1277.5
29	1284.5	1291	1297.5
31	1304.5	1311	1317.5
33	1324.5	1331	1337.5

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit
Maximum Supply Voltage	Vcc	-0.5		4.0	V
Storage Temperature	TS	-40		+85	°C
Operating Case Temperature	Tc	0		70	°C
Operating Relative Humidity	RH	5		85	%
Damage threshold	Rxdmg	5.5			dBm

### Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Dissipation	PD			4.5	W	
Transmitter						
Differential data input swing per lane		900			mVp-p	
Differential input impedance	Zin	90	100	110	ohm	
DC common mode voltage (Vcm)		-350		2850	mV	
Receiver						
Differential output amplitude				900	mVp-p	
Differential output impedance	Zout	90	100	110	ohm	
Output Rise/Fall Time	tr/tf	12			ps	20%~80%
AC Common Mode Output Voltage				7.5	mV	
Eye width		0.57			UI	
Eye height differential		228			mV	@TP4, 1E-15
DC common mode voltage (Vcm)		-350		2850	mV	1

#### Notes:

1. Vcm is generated by the host. Specification includes effects of ground offset voltage.

## Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
Signaling speed			53.125		Gbaud	
Modulation format		PAM4				
Optical center wavelength	$\lambda$	$\lambda_c - 6.5$	$\lambda_c$	$\lambda_c + 6.5$	nm	
Side-mode suppression ratio	SMSR	30			dB	
Extinction ratio	ER	3.5			dB	
Transmit OMA	TxOMA	0.7		4.7	dBm	
Transmit average	TxAVG	-1.4		4.5	dBm	1
Launch power in OMA <sub>outer</sub> minus TDECQ		-0.7			dBm	2
Launch power in OMA <sub>outer</sub> minus TDECQ		-0.6			dBm	3
Transmitter and dispersion eye closure	TDECQ			3.4	dB	
Optical return loss tolerance				15.6	dB	4
<b>Receiver</b>						
Signaling speed			53.125		Gbaud	
Damage threshold		5.5			dBm	
Receive power (OMA <sub>outer</sub> )	RxOMA			4.7	dBm	
Average receive power	RxAVG	-7.7		4.5	dBm	
Receiver sensitivity (OMA <sub>outer</sub> )	SenOMA			Max(-6.1, SECQ-7.5)	dBm	5
Receiver reflectance				-26	dB	
LOS assert	LOSA	-15			dBm	
LOS De-assert	LOSD			-12	dBm	
LOS hysteresis		0.5			dB	

### Notes:

1. Average launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. For  $ER \geq 4.5\text{dB}$
3. For  $ER < 4.5\text{dB}$
4. Transmitter reflectance is defined looking into the transmitter.
5. Sensitivity is specified at  $2.4 \times 10^{-4}$  BER.

## Pin Descriptions


Pin	Symbol	Name/Descriptions	Ref.
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2-	Transmitter Inverted Data Input	
3	Tx2+	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4-	Transmitter Inverted Data Input	
6	Tx4+	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	VccRx	3.3V Power Supply Receiver	
11	SCL	2-Wire serial Interface Clock	2
12	SDA	2-Wire serial Interface Data	2
13	GND	Transmitter Ground (Common with Receiver Ground)	1
14	Rx3+	Receiver Non-Inverted Data Output	
15	Rx3-	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1+	Receiver Non-Inverted Data Output	
18	Rx1-	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2-	Receiver Inverted Data Output	
22	Rx2+	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4-	Receiver Inverted Data Output	1
25	Rx4+	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsl	Module Present	
28	IntL	Interrupt	2
29	VccTx	3.3V power supply transmitter	
30	Vcc1	3.3V power supply	
31	LPMode	Low Power Mode	2
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3+	Transmitter Non-Inverted Data Input	
34	Tx3-	Transmitter Inverted Data Output	

35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1+	Transmitter Non-Inverted Data Input	
37	Tx1-	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1


**Notes:**

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K $\Omega$  to 10K $\Omega$  pull-up resistor to VccHost.

**Electrical Pin-out Details**

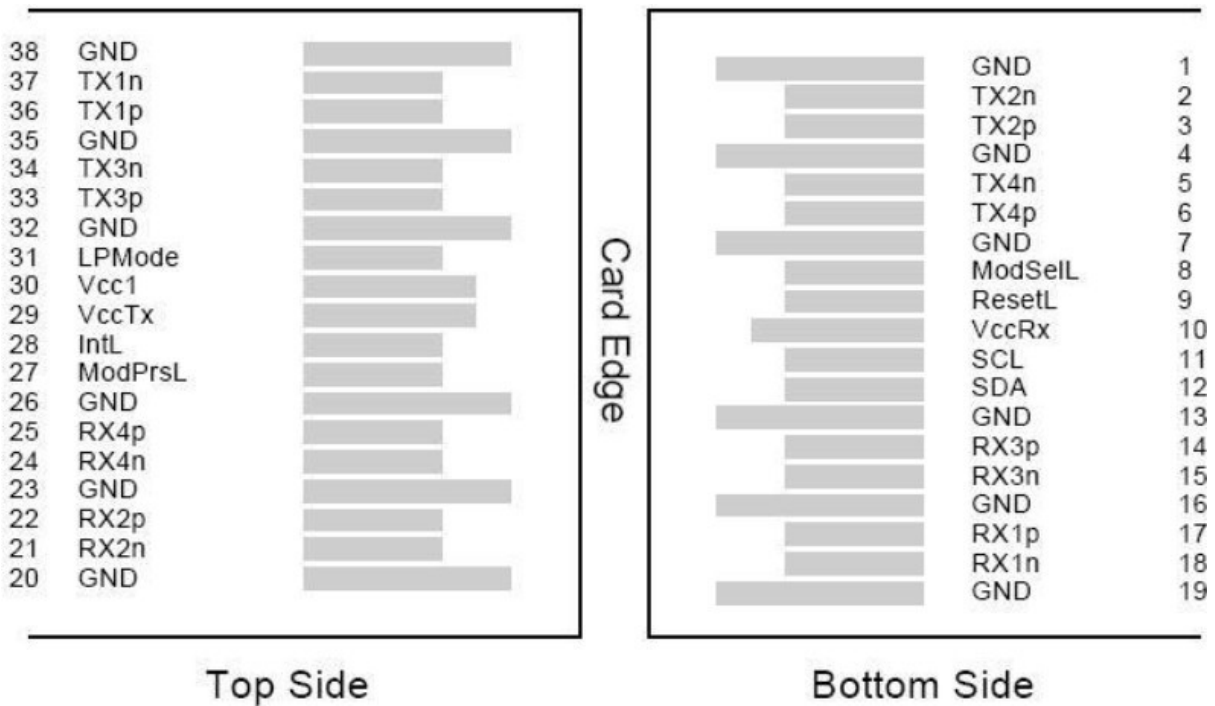

Mechanical Specifications

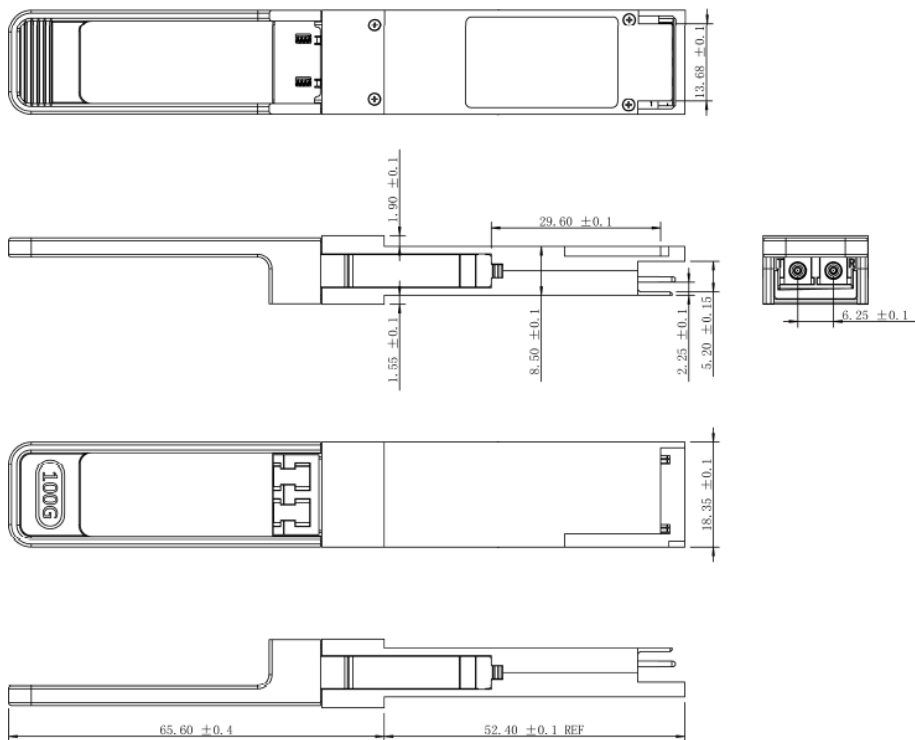

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

