

## QDD-4ZQ100-CU2M-C

Cisco® QDD-4ZQ100-CU2M Compatible TAA Compliant 400GBase-CU QSFP-DD 400G to 4xQSFP56 100G PAM-4 Direct Attach Cable (Passive Twinax, 2m)

### Features:

- Compliant with QSFP-DD MSA Specification Rev 3.4
- SFF-8679 electrical interface compliant
- SFF-8636 management interface support
- Compatible with IEEE 802.3bj, IEEE 802.3by, IEEE 802.3cd
- Supports aggregate data rates of 100 and 400Gbps
- I2C for EEPROM communication
- Pull-to-release slide latch design
- Excellent EMI/EMC performance 360-degree cable shield termination
- Advantage dual side pre-solder automated assembly technologies
- Low loss, stronger mechanical features, more flexible
- RoHS Compliant and Lead-Free



### Applications:

- Switches, Servers and Routers
- Data Center Networks
- Storage Area Networks
- High Performance Computing

### Product Description

This is an Cisco® QDD-4ZQ100-CU2M compatible TAA compliant 400GBase-CU QSFP-DD 400G to 4xQSFP56 100G PAM-4 direct attach cable that operates over passive copper with a maximum reach of 2.0m (6.6ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



## Mechanical Characteristics

Cable Jacket Material	Flammability Rating
PVC	VW-1

## Electrical Characteristics

Parameter	Specification
Impedance	100Ω
Data Rate	56Gbps per lane (PAM-4)
Voltage	3.3V DC
Current (signal application only)	0.75A
Operating Temperature	-10°C to 55°C
Storage Temperature	-10°C to 55°C
High Speed Compliant	IEEE 802.3cd

## QSFP-DD to 4xQSFP Wiring Schematic

P1 (QSFP-DD)			P2 (QSFP)	
GND				GND
TX1+	<b>36</b>	↔	<b>17</b>	RX1+
TX1-	<b>37</b>	↔	<b>18</b>	RX1-
GND				GND
TX2+	<b>3</b>	↔	<b>22</b>	RX2+
TX2-	<b>2</b>	↔	<b>21</b>	RX2-
GND				GND
GND				GND
RX1+	<b>17</b>	↔	<b>36</b>	TX1+
RX1-	<b>18</b>	↔	<b>37</b>	TX1-
GND				GND
RX2+	<b>22</b>	↔	<b>3</b>	TX2+
RX2-	<b>21</b>	↔	<b>2</b>	TX2-
GND				GND
P1 (QSFP-DD)			P3 (QSFP)	
GND				GND
TX3+	<b>33</b>	↔	<b>17</b>	RX1+
TX3-	<b>34</b>	↔	<b>18</b>	RX1-
GND				GND
TX4+	<b>6</b>	↔	<b>22</b>	RX2+
TX4-	<b>5</b>	↔	<b>21</b>	RX2-
GND				GND
GND				GND
RX3+	<b>14</b>	↔	<b>36</b>	TX1+
RX3-	<b>15</b>	↔	<b>37</b>	TX1-
GND				GND
RX4+	<b>25</b>	↔	<b>3</b>	TX2+
RX4-	<b>24</b>	↔	<b>2</b>	TX2-
GND				GND

P1 (QSFP-DD)			P4 (QSFP)	
GND				GND
TX5+	<b>74</b>	↔	<b>17</b>	RX1+
TX5-	<b>75</b>	↔	<b>18</b>	RX1-
GND				GND
TX6+	<b>41</b>	↔	<b>22</b>	RX2+
TX6-	<b>40</b>	↔	<b>21</b>	RX2-
GND				GND
GND				GND
RX5+	<b>55</b>	↔	<b>36</b>	TX1+
RX5-	<b>56</b>	↔	<b>37</b>	TX1-
GND				GND
RX6+	<b>60</b>	↔	<b>3</b>	TX2+
RX6-	<b>59</b>	↔	<b>2</b>	TX2-
GND				GND
P1 (QSFP-DD)			P5 (QSFP)	
GND				GND
TX7+	<b>71</b>	↔	<b>17</b>	RX1+
TX7-	<b>72</b>	↔	<b>18</b>	RX1-
GND				GND
TX8+	<b>44</b>	↔	<b>22</b>	RX2+
TX8-	<b>43</b>	↔	<b>21</b>	RX2-
GND				GND
GND				GND
RX7+	<b>52</b>	↔	<b>36</b>	TX1+
RX7-	<b>53</b>	↔	<b>37</b>	TX1-
GND				GND
RX8+	<b>63</b>	↔	<b>3</b>	TX2+
RX8-	<b>62</b>	↔	<b>2</b>	TX2-
GND				GND

## QSFP-DD Pin Descriptions

PIN	Logic	Symbol	Description	Notes
1		GND	Ground.	1
2	CML-I	Tx2-	Transmitter Inverted Data Input.	
3	CML-I	Tx2+	Transmitter Non-Inverted Data Input.	
4		GND	Ground.	1
5	CML-I	Tx4-	Transmitter Inverted Data Input.	
6	CML-I	Tx4+	Transmitter Non-Inverted Data Input.	
7		GND	Ground.	1
8	LVTTTL-I	ModSelL	Module Select.	
9	LVTTTL-I	ResetL	Module Reset.	
10		VccRx	+3.3V Power Supply Receiver.	2
11	LVC MOS-I/O	SCL	2-wire serial interface clock.	
12	LVC MOS-I/O	SDA	2-wire serial interface data.	
13		GND	Ground.	1
14	CML-O	Rx3+	Receiver Non-Inverted Data Output.	
15	CML-O	Rx3-	Receiver Inverted Data Output.	
16		GND	Ground.	1
17	CML-O	Rx1+	Receiver Non-Inverted Data Output.	
18	CML-O	Rx1-	Receiver Inverted Data Output.	
19		GND	Ground.	1
20		GND	Ground.	1
21	CML-O	Rx2-	Receiver Inverted Data Output.	
22	CML-O	Rx2+	Receiver Non-Inverted Data Output.	
23		GND	Ground.	1
24	CML-O	Rx4-	Receiver Inverted Data Output.	
25	CML-O	Rx4+	Receiver Non-Inverted Data Output.	
26		GND	Ground.	1
27	LVTTTL-O	ModPrsL	Module Present.	
28	LVTTTL-O	IntL	Interrupt.	
29		VccTx	+3.3V Power Supply Transmitter.	2
30		Vccl	+3.3V Power Supply.	2
31	LVTTTL-I	InitMode	Initialization mode; In legacy QSFP applications, the InitMode pad is called LPMODE.	
32		GND	Ground.	1
33	CML-I	Tx3+	Transmitter Non-Inverted Data Input.	
34	CML-I	Tx3-	Transmitter Inverted Data Input.	
35		GND	Ground.	1
36	CML-I	Tx1+	Transmitter Non-Inverted Data Input.	
37	CML-I	Tx1-	Transmitter Inverted Data Input.	
38		GND	Ground.	1


PIN		Symbol	Description	Notes
39		GND	Ground.	1
40	CML-I	Tx6-	Transmitter Inverted Data Input.	
41	CML-I	Tx6+	Transmitter Non-Inverted Data Input.	
42		GND	Ground.	1
43	CML-I	Tx8-	Transmitter Inverted Data Input.	
44	CML-I	Tx8+	Transmitter Non-Inverted Data Input.	
45		GND	Ground.	1
46		Reserved	For future use.	3
47		VSI	Module Vendor Specific 1.	3
48		VccRx1	3.3V Power Supply.	2
49		VS2	Module Vendor Specific 2.	3
50		VS3	Module Vendor Specific 3.	3
51		GND	Ground.	1
52	CML-O	Rx7+	Receiver Non-Inverted Data Output.	
53	CML-O	Rx7-	Receiver Inverted Data Output.	
54		GND	Ground.	1
55	CML-O	Rx5+	Receiver Non-Inverted Data Output.	
56	CML-O	Rx5-	Receiver Inverted Data Output.	
57		GND	Ground.	1
58		GND	Ground.	1
59	CML-O	Rx6-	Receiver Inverted Data Output.	
60	CML-O	Rx6+	Receiver Non-Inverted Data Output.	
61		GND	Ground.	1
62	CML-O	Rx8-	Receiver Inverted Data Output.	
63	CML-O	Rx8+	Receiver Non-Inverted Data Output.	
64		GND	Ground.	1
65		NC	No Connect.	3
66		Reserved	For future use.	3
67		VccTx1	3.3V Power Supply.	2
68		Vcc2	3.3V Power Supply.	2
69		Reserved	For future use.	3
70		GND	Ground.	1
71	CML-I	Tx7+	Transmitter Non-Inverted Data Input.	
72	CML-I	Tx7-	Transmitter Inverted Data Input.	
73		GND	Ground.	1
74	CML-I	Tx5+	Transmitter Non-Inverted Data Input.	
75	CML-I	Tx5-	Transmitter Inverted Data Input.	
76		GND	Ground.	1

**Notes:**


1. QSFP-DD uses common ground (GND) for all signals and supply (power). All are common within the QSFP-DD module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 shall be applied concurrently. Requirements defined for the host side of the Host Card Edge Connector are listed in Table 6. VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 may be internally connected within the module in any combination. The connector Vcc pins are each rated for a maximum current of 1000 mA.
3. All Vendor Specific, Reserved and No Connect pins may be terminated with 50 ohms to ground on the host. Pad 65 (No Connect) shall be left unconnected within the module. Vendor specific and Reserved pads shall have an impedance to GND that is greater than 10 kOhms and less than 100 pF.
4. Plug Sequence specifies the mating sequence of the host connector and module. The sequence is 1A, 2A, 3A, 1B, 2B, 3B. (see Figure 2 for pad locations) Contact sequence A will make, then break contact with additional QSFP-DD pads. Sequence 1A, 1B will then occur simultaneously, followed by 2A, 2B, followed by 3A,3B.

# QSFP-DD Electrical Pin-out Details

## Top side viewed from top

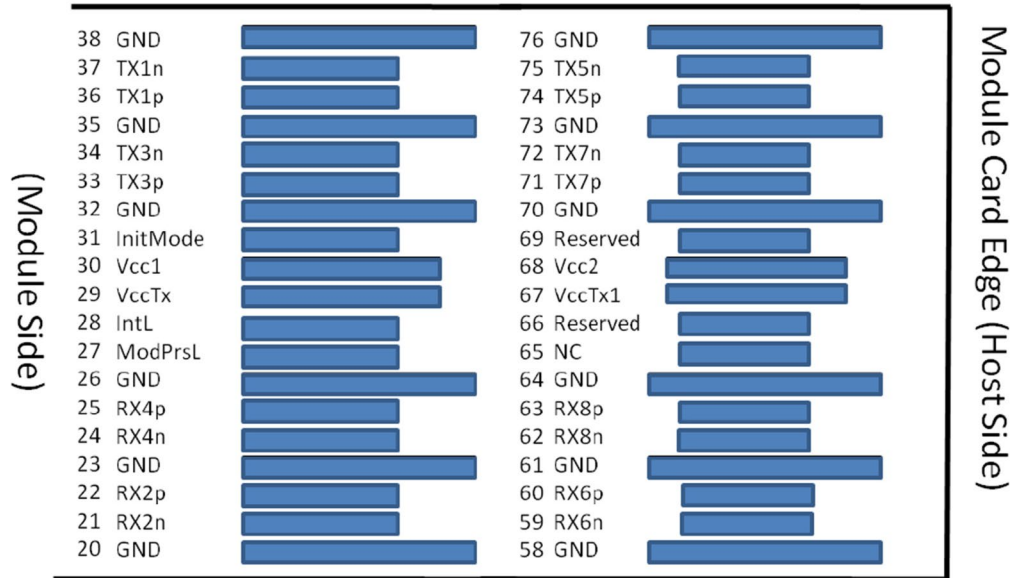

## Bottom side viewed from bottom

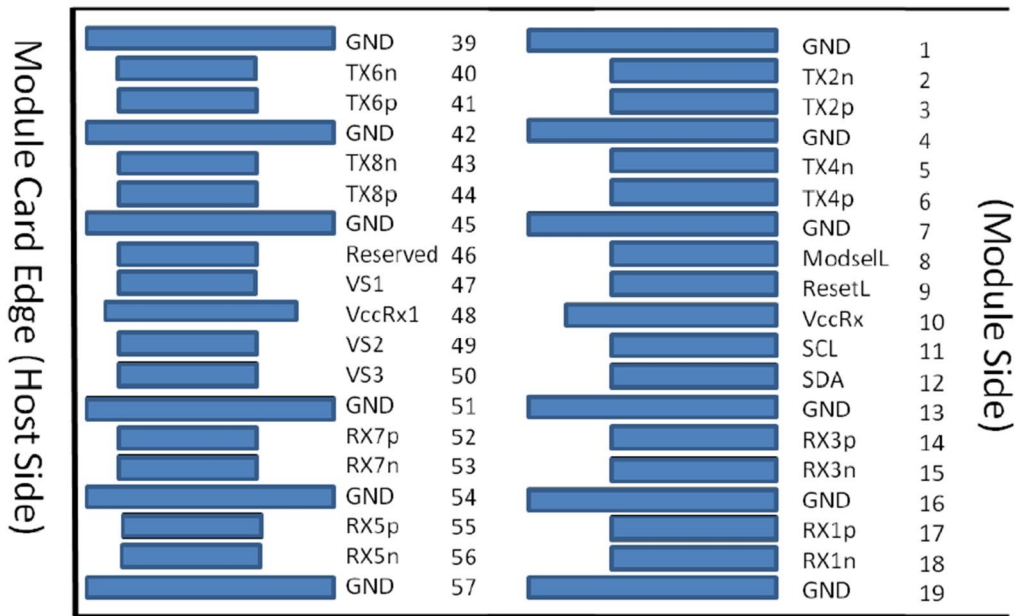

## QSFP56 Pin Definitions

Pin	Logic	Symbol	Name/Descriptions	Ref.
1		GND	Module Ground.	1
2	CML-I	Tx2-	Transmitter inverted data input.	
3	CML-I	Tx2+	Transmitter non-inverted data input.	
4		GND	Module Ground.	1
5	CML-I	Tx4-	Transmitter inverted data input.	
6	CML-I	Tx4+	Transmitter non-inverted data input.	
7		GND	Module Ground.	1
8	LVTTTL-I	MODSEIL	Module Select.	2
9	LVTTTL-I	ResetL	Module Reset.	2
10		VCCRx	+3.3v Receiver Power Supply.	
11	LVC MOS-I	SCL	2-wire Serial interface clock.	2
12	LVC MOS-I/O	SDA	2-wire Serial interface data.	2
13		GND	Module Ground.	1
14	CML-O	RX3+	Receiver non-inverted data output.	
15	CML-O	RX3-	Receiver inverted data output.	
16		GND	Module Ground.	1
17	CML-O	RX1+	Receiver non-inverted data output.	
18	CML-O	RX1-	Receiver inverted data output.	
19		GND	Module Ground.	1
20		GND	Module Ground.	1
21	CML-O	RX2-	Receiver inverted data output.	
22	CML-O	RX2+	Receiver non-inverted data output.	
23		GND	Module Ground.	1
24	CML-O	RX4-	Receiver inverted data output.	
25	CML-O	RX4+	Receiver non-inverted data output.	
26		GND	Module Ground.	1
27	LVTTTL-O	ModPrsL	Module Present, internal pulled down to GND.	
28	LVTTTL-O	IntL	Interrupt output should be pulled up on host board.	2
29		VCCTx	+3.3v Transmitter Power Supply.	
30		VCC1	+3.3v Power Supply.	
31	LVTTTL-I	LPMODE	Low Power Mode.	2
32		GND	Module Ground.	1
33	CML-I	Tx3+	Transmitter non-inverted data input.	
34	CML-I	Tx3-	Transmitter inverted data input.	
35		GND	Module Ground.	1
36	CML-I	Tx1+	Transmitter non-inverted data input.	
37	CML-I	Tx1-	Transmitter inverted data input.	
38		GND	Module Ground.	1



## About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

## A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



## Contact Information

ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)

Telephone: 952-852-0252

ProLabs UK

Email: [salessupport@prolabs.com](mailto:salessupport@prolabs.com)

Telephone: +44 1285 719 600