



### SFP-GE-T-I-OPC

Cisco® SFP-GE-T Compatible TAA 10/100/1000Base-TX SFP Transceiver (Copper, 100m, RJ-45, -40 to 85C)

#### Features

- INF-8074 Compliance
- RJ-45 Connector
- Copper Media Type
- Industrial Temperature -40 to 85 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



#### Applications:

- 1000Base Ethernet
- Access and Enterprise

#### Product Description

This Cisco® SFP-GE-T compatible SFP transceiver provides 10/100/1000Base-TX throughput up to 100m over a copper connection via a RJ-45 connector. This TX module supports 10/100/1000Base auto-negotiation and can be configured to fit your needs. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. It is built to meet or exceed the specifications of Cisco®, as well as to comply with MSA (Multi-Source Agreement) standards to ensure seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

### Absolute Maximum Ratings

| Parameter             | Symbol | Min. | Typ. | Max. | Unit   | Notes |
|-----------------------|--------|------|------|------|--------|-------|
| Data Rate             | DR     | 10   |      | 1000 | Mb/sec | 2     |
| Cable Length          | CL     |      |      | 100  | m      | 3     |
| Bit Error Rate        | BER    |      |      | 10   |        |       |
| Operating Temperature | TOP    | -40  |      | 85   | °C     | 4     |
| Storage Temperature   | TSTO   | -40  |      | 85   | °C     | 5     |
| Supply Current        | IS     |      | 320  | 375  | mA     | 6     |
| Input Voltage         | VCC    | 3.14 | 3.3  | 3.46 | V      | 7     |
| Maximum Voltage       | VMAX   |      |      | 4    | V      | 6     |

### Notes:

1. IEEE 802.3 compatible
2. Category 5 UTP
3. Case Temperature
4. Ambient Temperature
5. For electrical power interface
6. Referenced to GND. For electrical power interface

## Electrical Characteristics

| Parameter                                             |      | Symbol              | Min.          | Typ. | Max.          | Unit | Notes |
|-------------------------------------------------------|------|---------------------|---------------|------|---------------|------|-------|
| High Speed Electrical Interface Host-SFP              |      |                     |               |      |               |      |       |
| Single ended Input Swing                              |      | V <sub>IN</sub>     | 250           |      | 1200          | mV   | 1     |
| Single ended output Swing                             |      | V <sub>OUT</sub>    | 275           |      | 800           | mV   | 1     |
| Rise time (20%-80%)                                   |      | T <sub>R</sub>      |               | 175  |               | ps   |       |
| Fall Time (20%-80%)                                   |      | T <sub>F</sub>      |               | 175  |               | ps   |       |
| Tx Input Impedance                                    |      | Z <sub>IN</sub>     |               | 50   |               | ohm  | 1     |
| Rx Output Impedance                                   |      | Z <sub>OUT</sub>    |               | 50   |               | ohm  | 1     |
| High Speed Electrical Interface Transmission Line-SFP |      |                     |               |      |               |      |       |
| Line Frequency                                        |      | F <sub>L</sub>      |               | 125  |               | MHz  | 2     |
| Tx Output Impedance Differential                      |      | Z <sub>OUT_TX</sub> |               | 100  |               | Ohm  | 3     |
| Rx Input Impedance Differential                       |      | Z <sub>IN_RX</sub>  |               | 100  |               | Ohm  | 3     |
| Low Speed Electrical Signal                           |      |                     |               |      |               |      |       |
| SFP Output                                            | Low  | V <sub>OL</sub>     | 0             |      | 0.5           | V    | 4     |
|                                                       | High | V <sub>OH</sub>     | Host_Vcc –0.5 |      | Host_Vcc +0.3 | V    | 4     |
| SFP Input                                             | Low  | V <sub>IL</sub>     | 0             |      | 0.8           | V    | 4     |
|                                                       | High | V <sub>IH</sub>     | 2             |      | VCC + 0.3     | V    | 4     |

### Notes:

1. Single ended
2. 5-level encoding
3. For all frequencies between 1MHz and 125MHz
4. External 4.7-10k ohm pull-up resistor required



## Pin Descriptions

| Pin | Symbol      | Name/Descriptions                                 | Ref. |
|-----|-------------|---------------------------------------------------|------|
| 1   | VEET        | Transmitter ground (common with receiver ground)  | 1    |
| 2   | TX_FAULT    | Transmitter Fault. Not supported                  |      |
| 3   | TX_DISABLE  | Transmitter Disable. PHY disabled on high or open | 2    |
| 4   | MOD_DEF (2) | Module Definition 2. Data line for serial ID      | 3    |
| 5   | MOD_DEF (1) | Module Definition 1. Clock line for serial ID     | 3    |
| 6   | MOD_DEF (0) | Module Definition 0. Grounded within the module   | 3    |
| 7   | Rate Select | No connection required                            |      |
| 8   | RX_LOS      | Loss of Signal                                    |      |
| 9   | VEER        | Receiver ground (common with transmitter ground)  | 1    |
| 10  | VEER        | Receiver ground (common with transmitter ground)  | 1    |
| 11  | VEER        | Receiver ground (common with transmitter ground)  | 1    |
| 12  | RD-         | Receiver Inverted DATA out. AC coupled            |      |
| 13  | RD+         | Receiver Non-inverted DATA out. AC coupled        |      |
| 14  | VEER        | Receiver ground (common with transmitter ground)  | 1    |
| 15  | VCCR        | Receiver power supply                             |      |
| 16  | VCCT        | Transmitter power supply                          |      |
| 17  | VEET        | Transmitter ground (common with receiver ground)  | 1    |
| 18  | TD+         | Transmitter Non-Inverted DATA in. AC coupled      |      |
| 19  | TD-         | Transmitter Inverted DATA in. AC coupled          |      |
| 20  | VEET        | Transmitter ground (common with receiver ground)  | 1    |


### Notes:

1. Circuit ground is connected to chassis ground
2. Disabled: TX\_DISABLE > 2V or open, Enabled: TX\_DISABLE < 0.8V
3. Should be pulled up with 4.7k-10k ohm on host board to a voltage between 2V and 3.6V

Electrical Pad Layout

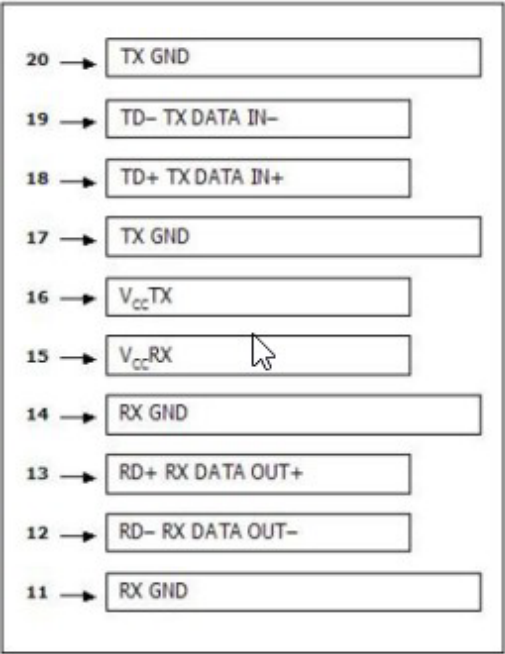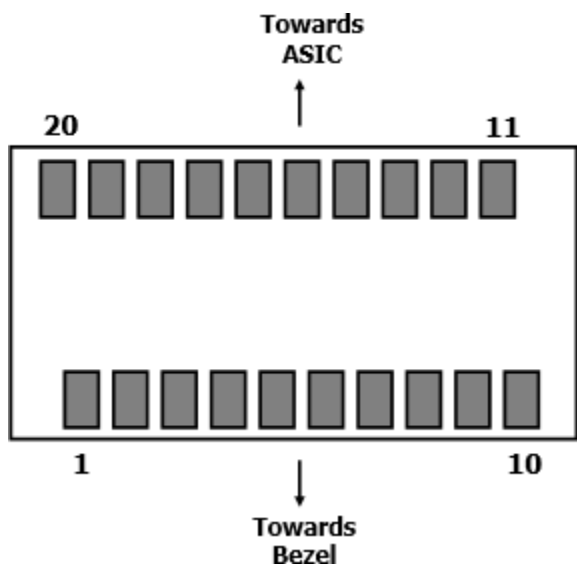


Top of Board

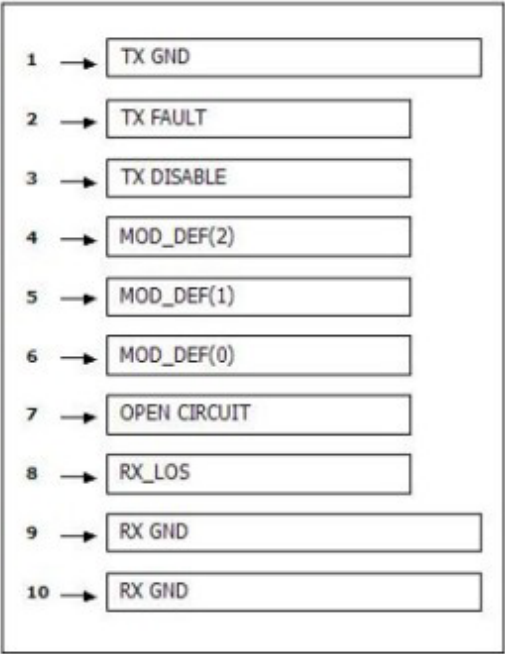

Bottom of Board

Mechanical Specifications

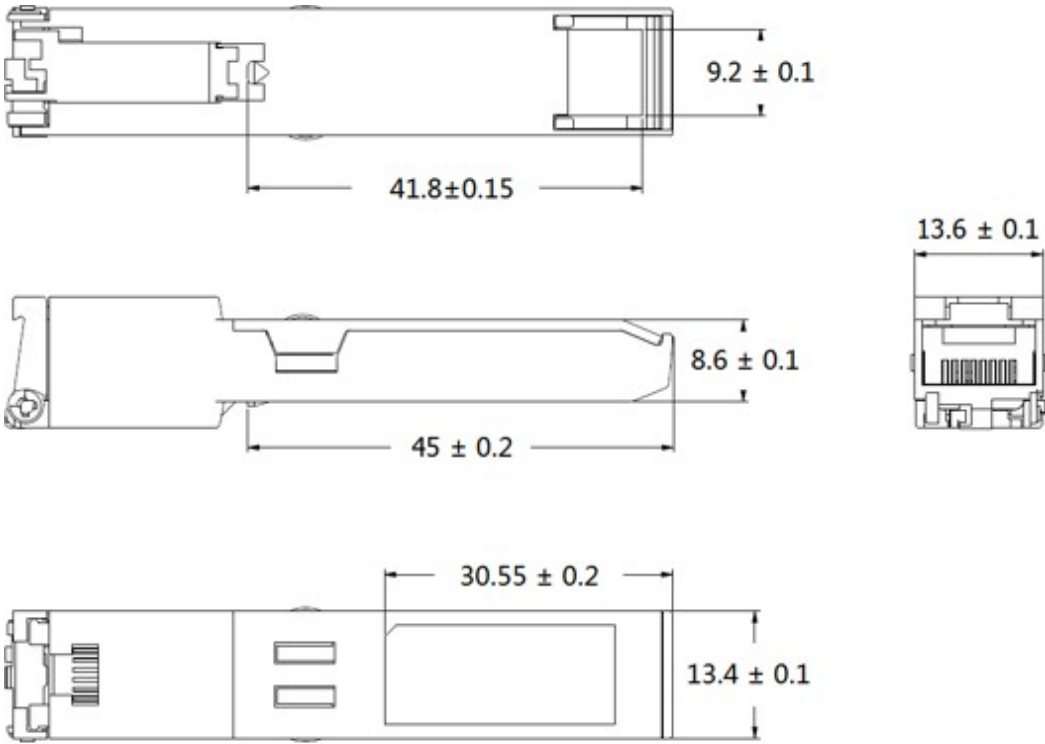

UNIT: mm

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

